


Product technical parameter


Model number	ACM - MU89M
Frequency	865~868MHz (EU),902~928MHz(US)
Protocol	ISO18000-6C (EPC GEN2)
RF power	33dbm (adjustable)
Current Dissipation	1500mA
Inventory speed	200pcs/s
Work mode	answer mode/real-time inventory mode
Read distance	0~15m(depends on antenna and tag)
Power supply	+3.7~5VDC (low power dissipation)
Interface	RS232 (3.3V TTL level)
Antenna ports qty	With eight antenna ports
Connector for antenna	SMA
GPIO	2 input and 2 outputs
Firmware upgrading	Support
Operation temperature	-20~+55℃
Storage temperature	-20~+85℃
Size	78.7*91*8.2mm
Weight	77g


Detailed image

01 Spare parts: 1pc module, 1pc wire cable

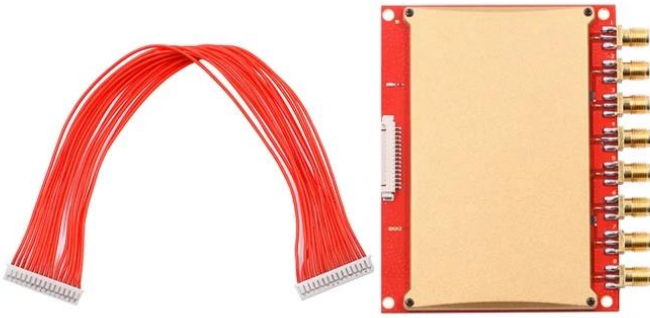


02 Module dimension

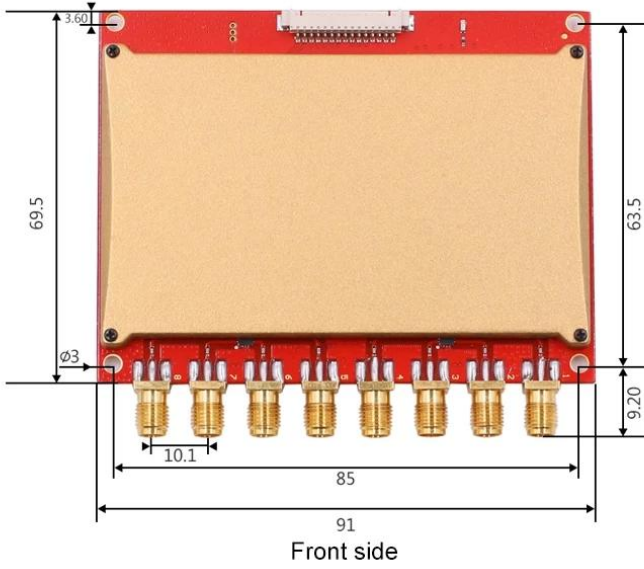

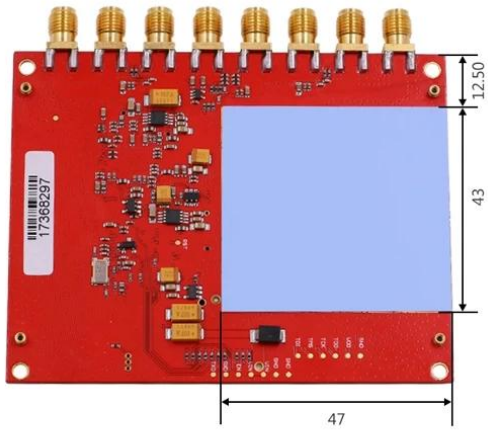


Back side

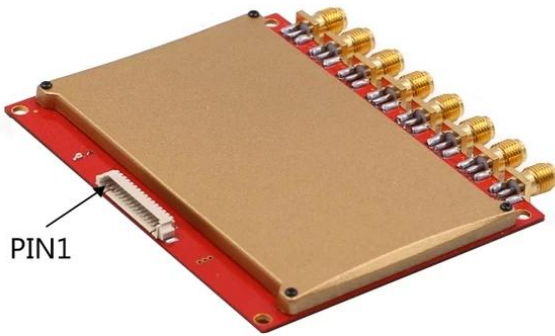

Host interface


No.	Symbol	Comment
1	GND	Ground
2	GND	
3	VCC	Power Supply
4	VCC	
5	GPO1	General output (3.3V TTL level)
6	GPO2	
7	GPI1	General input (3.3V TTL level)
8	BUZZER	Buzzer driver output, high level effective. Current sourcing over
9	RXD	Serial data input
10	TXD	Serial data output
11	USB-DM	For test only
12	USB-DP	
13	GPI2	General input (3.3V TTL level)
14	EN	Enable. High level effective with internal 10kOhm resistor pulled up to VCC
15	RS485_CTRL	RS-485 direction control

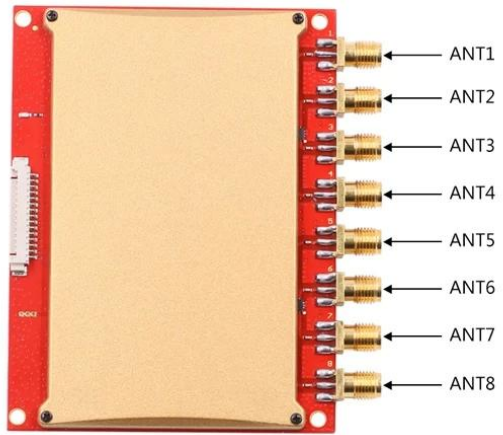


Antenna interface

User manual

01 Module connect with interface board through wire cable

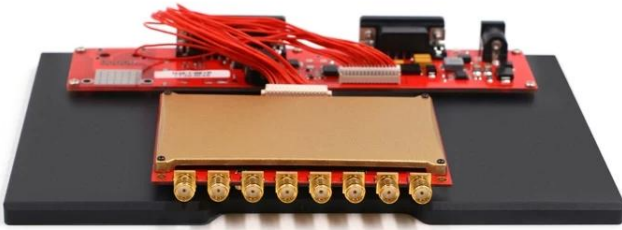

02 Module connect with antenna through SMA connector

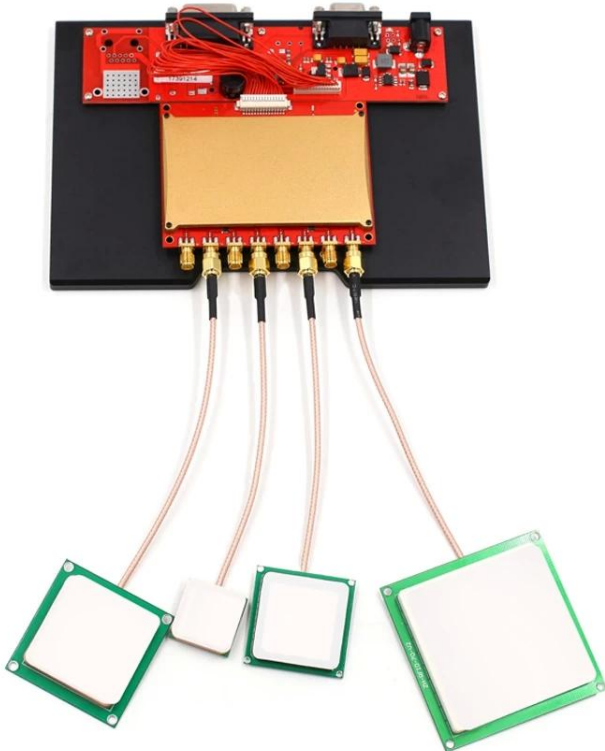

03 Interface board connect with power supply, use RS232 serial port connect with computer for communication, our interface board also with GPIO connector for option.



Relative products


Our R2000 module have three model according different antenna port,there are one port,four ports,eight ports for option.



CF-MU801
with one antenna port



CF-MU804
with four antenna port



CF-MU808
with eight antenna ports



uhf 模块, ACM812A 模块, 模块 ACM802A, ACM818A, ACM801A 模块. 模块 ACM801A 模块 (约 200 毫米) 模块. 模块 模块 模块.





ACM812A
2-5m □□ □□ UHF □□
Wiegand 26 □□, RS232 / 485

ACM818A
10-20m □□□ UHF □□
Wiegand 26 □□, RS232 / 485

ACM802A
8-10m □□ □□ UHF □□
Wiegand 26 □□, RS232 / 485



