



□□ □□ **AC ~ DC 12V 24V** □□□ □□ □□ □□
□□ **AC** □□□ **12V**

3A □□ □□ □□ □□
□□□ □□ □□ □ □□ □□□ □□□□ □□□□.
□ □□ □□ □□□ □□□, □□□ □□ □□□ □□, □□ □□ □□□ □□
□□ □□□ □□□□□ □□□□□.

[illegible]

0 0 0 0 , 0 0 0 0 , 0 0 0 0 0 0 0 0 2 m s 0 0 0 0 6 5 ° C . 0 0 , 0 0 0 0 0 0 0 0



- 1 : COM 點 點, 點點點點 點 點, 點 點點 點 DC12V, 點點 點 點 點 (0-15 點 點, 點, 3 點 點);
- 2 : NC 點點 點 COM 點點, 點點點點 點 點 DC12V, 點 點點 點點 點, 點 點 點 點, 點 點 (0-15 點 點, 2 點, 3 點);
- 3 : DC12V 點 點 點, 4 點, 5 點點;
- 4 : 點點 點 (點點 點, 點) 點 點 點 點點 點 點點點 點點 點 點點 點點 點 (點點 點, 點) 點 點點點 點 點.
- 5 : 點點 點 (點點 點, 點 點) 點, 點點 點點 點 點點點 點點 點 點點 點點 點 (點點 點, 點 點) 點 點點;
- 6 : 點 點 點 點 點點 點點 點 點 點 點 12V 點 點 點


PRODUCT INTRODUCTION



POSITIVE



BACK

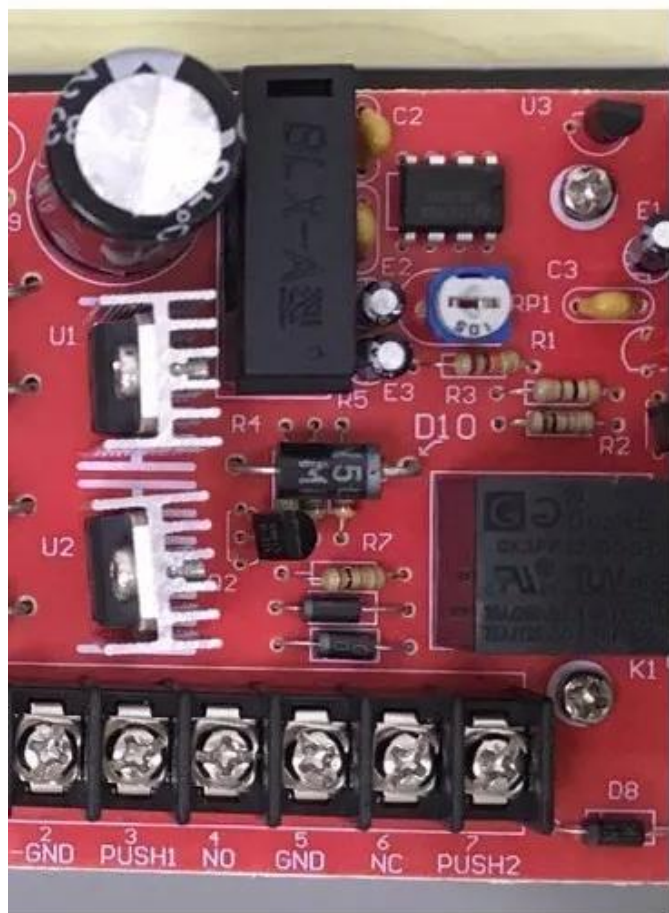



Access Control Power Supply Manual

Input voltage range, small size, high reliability, electromagnetic compatibility, efficiency, protection function, with remote control door, electric lock on the temperature (as compared with the frequency power) greatly reduced.

Features:

Input voltage: 110 ~ 240V AC;

Input Frequency: 50 ~ 60Hz;

Output voltage: DC12V;

Output Current: 3A;

Output voltage trim range: $\pm 10\% \sim \pm 15\%$;

Load:

1% typical;

Output stability:

0.5% typical;

Ripple and noise:

1%, peak to peak (100mVp-p typical);

Insulation voltage:

Junior / sub-polar inter-1500V AC, primary / shell between 1500V AC, sub-polar / shell between 500V AC;

Hold Time: full load typically 20ms;

Operating temperature: $-20 \sim +65^{\circ}\text{C}$;


Overload protection: All outputs in a short circuit, overload are protected; power output of 0-15 seconds delay locks;

Outer steel case size:

120mm $\times$ 95mm $\times$ 38mm

Weight: 315g

Output terminal wiring

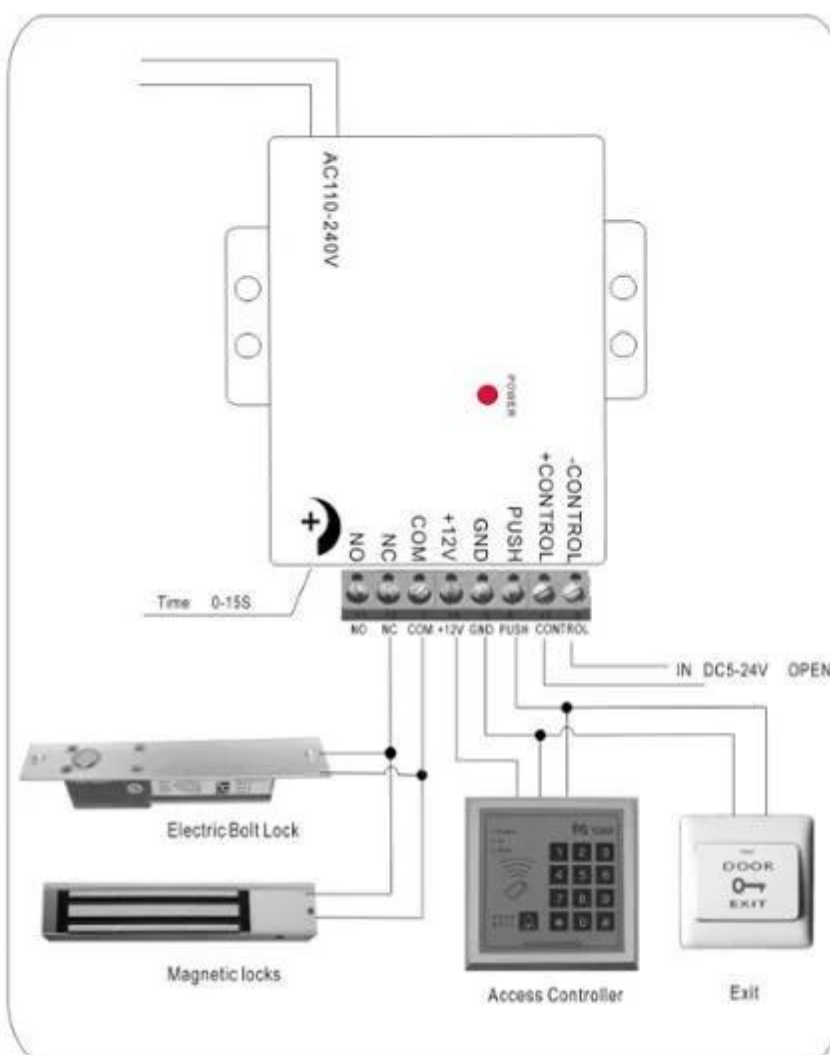

Attention! then electronically controlled lock must be transferred to 0 seconds delay, to prevent burning of electric locks.

Access controller Keypad



00 000 000 000 00 0 000 000 00 00000.
 00 000 000 000 000 00 0000 00000.
 000 000 0 00 00 000 00 0 00000.




□□ □□ (□□ □□ □□)

[illegible]

□□□□□□□□□□ 3 □□□□□□□□□□ !!!


በቅጽ 20 ላይ የሚገለጹ የሥራ ስራዎች በጥንቃቄ መመረቅ አለብዎት! የሥራ ስራዎች የሥራ ስራዎች በጥንቃቄ መመረቅ አለብዎት! የሥራ ስራዎች የሥራ ስራዎች በጥንቃቄ መመረቅ አለብዎት!

$\frac{1}{10} \times \frac{1}{10} = \frac{1}{100}$

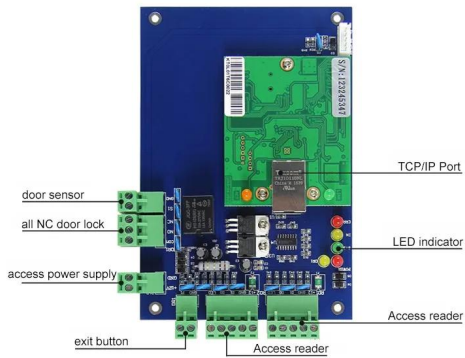


ACM-WEG01.

□□□ 1 □□□ □□ □ □□□□.

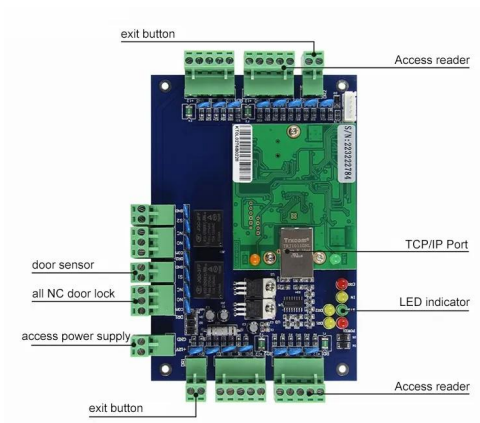

ACM-WEG02.

□□□ 2 □□ □□ □□ □ □□□□.

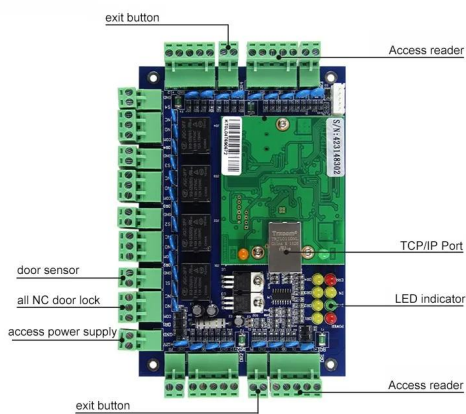

ACM-WEG04.

□□□ 4 □□ □□ □□ □ □□□□.

You May Like



ACM-K2A / B.

□□ □□ □□ LED□□□□ □□ □□ □□



ACM-Y280.

□□ □□ □□□ (280kg / 600lbs)



ACM-Y806-5A.

□□□□ □□□□□□ □□ □□ □□ 5A



ACM225.

RFID 12KHz.



ACM-210.

RFID Wiegand



ACM26X.

125KHz EM RFID : 115mm × 75.5mm × 16.8mm



125KHz TK4100 □ RFID □□ □□



RFID □□□, 125kHz, 13.56MHz □
860-960MHz



125kHz 13.56MHz 1k

[illegible]



০০০ ০০০০ ০০০০ ০০ ০০০ ০০০ ০০ ০০০ ০০০০০০!
 ০০০ ০০০ ০ ০০০ ০০০ ০০০০ ০০০০০ ০০০০ ০০০০০ ০০০০ ০০০০.