Product Description

Features:

- \blacktriangle Maintenance-free operation
- \blacktriangle Stable quality and high reliability
- \blacktriangle Compact design
- ▲ 10 years design time (at 25°C)

Applications:

♦ UPS

Fire alarm and security systems

♦ etc

- Emergency lighting
- ♦ DC power supply Auto control system

• Backup power for testing and measuring instruments

- ♠ Solar panel system
- Electronic apparatus and equipment Communication power supply
- ♠ Telecommunication system

♠ Alarm and security system


Specifications:

Туре	Specification
Nominal Voltage	12v(6cells)
Nominal Capacity	2.3ah (20hrs, 1.80v/cell, 25°C/77°F)
	2.08ah (10hrs, 1.80v/cell, 25°C/77°F)
	1.97ah (5hrs, 1.75v/cell, 25°C/77°F)
	1.42ah (1hrs, 1.60v/cell, 25°C/77°F)
Dimension	Length[]178±2mm
	Width[]34±2mm
	Container Height]60±2mm
	Total Height(with Terminal):65±3mm
Approx Weight	0.89kg
Terminal	F1
Container material	ABS
Internal Resistance	Αρρrox 75.0mΩ
Operation Temp.Range	Discharge:-15-50°C(5-122°F)
	Charge: 0-40°C(32-104°F)
	Storage: -15-40°C(5-104°F)
Nominal Operating	25±3°C(77±5°F)
Temp.Range	
Cycle Use	14.4V-15.0V(25°C/77°F) Coefficient:30mv/°C (Initial charging current less than 0.66A)
Standby Use	13.5V-13.8V(25°C/77°F) Coefficient:20mv/°C (No limit on Initial Charging Current)
Capacity affected by Temp.	102% 40°C(104°F)
	100% 25°C(77°F)
	80% 0°C(32°F)


Self Discharge:


KANGLIDA batteries maybe stored for up to 6months at $25^{\circ}C(77^{\circ}F)$ and then a freshing charge is required, for higher temperatures the time interval will be shorter.

Dimensions:

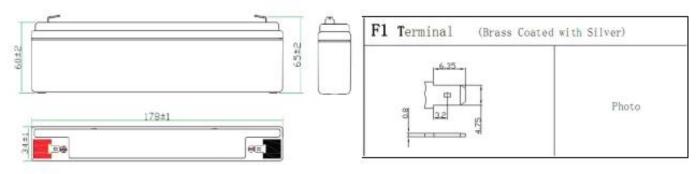

Characteristics:

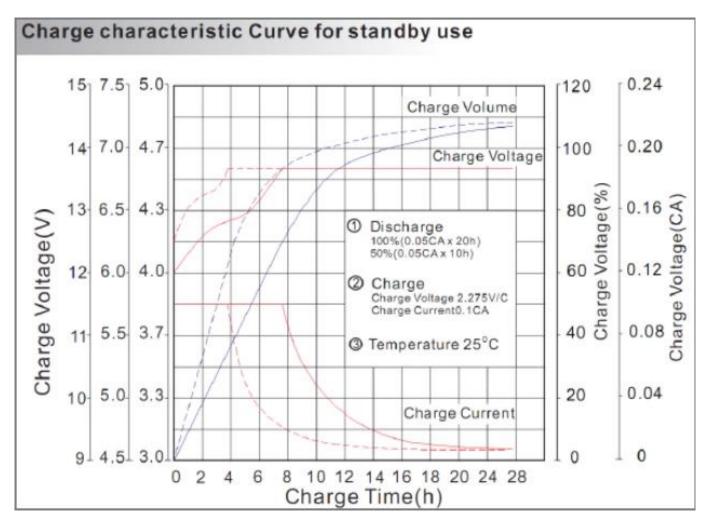

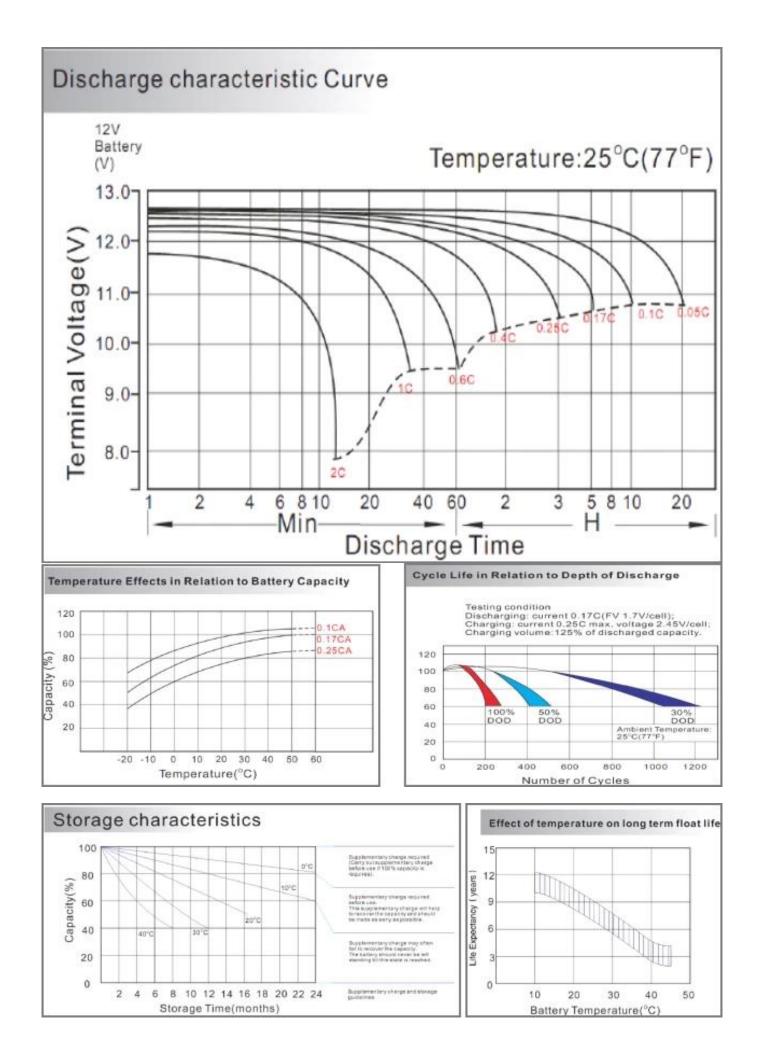

Attentions:

- 1. After received product, please checked box damaged or not, if find crack on battery body, contact with us and logistics, it should be caused by boorish handle during delivery;
- 2. Don't pull or shake terminal, otherwise, it may cause terminal loosen;
- 3. Battery is not allowed close to Tepid source or basked under the sun for a long time;
- 4. Charge in the obturate container is not allowed;
- 5. No short circuit. Battery should be stored full of electronic when not in need, and the battery should be charged every three months in order to avoid the irreversible sulphation. When battery case bursts or electrolyte leaks, battery should be changed lest the acid corrosion.
- 6. No battery in environment with the acid gas.
- 7. When battery is used as the backup battery, be careful and check it at regular time to avoid the damage battery. Especially the battery beyond one year should be checked in time, and change the less capacity and scrapped battery.(some batteries maybe have voltage but no current; some batteries maybe have current but no voltage; some maybe have both but less capacity:all these conditions cannot meet the work, reach the power-on time. Do not forth small battery, cause the huge losses)
- 8. Forbidden put battery in the fire, otherwise it will cause an explosion.
- 9. When battery cracks or leaks, please use cotton cloth clean it. When skin contacts to the liquid, wash with fresh water immediately. See doctor if serious.
- 10. No wash on the surface of the battery with the organic solution.
- 11. If the equipment uses batteries in groups, the batteries must be selected with similar voltage before usage, otherwise some batteries in the group will be damaged due to inconsistent voltage and internal resistance.

In the process of recycling the battery, do not use it under the state of dissatisfied charging. As a result, the battery will be sulphated, and the storage performance and capacity will drop to a long-term dissatisfied state; the battery's capacity and efficiency of use will not be obtained.









Protective cap for terminals




Copper silver plated terminals


Scope of Application





Factory Wholesale Exit Button/Adapter/Linear Power Supply

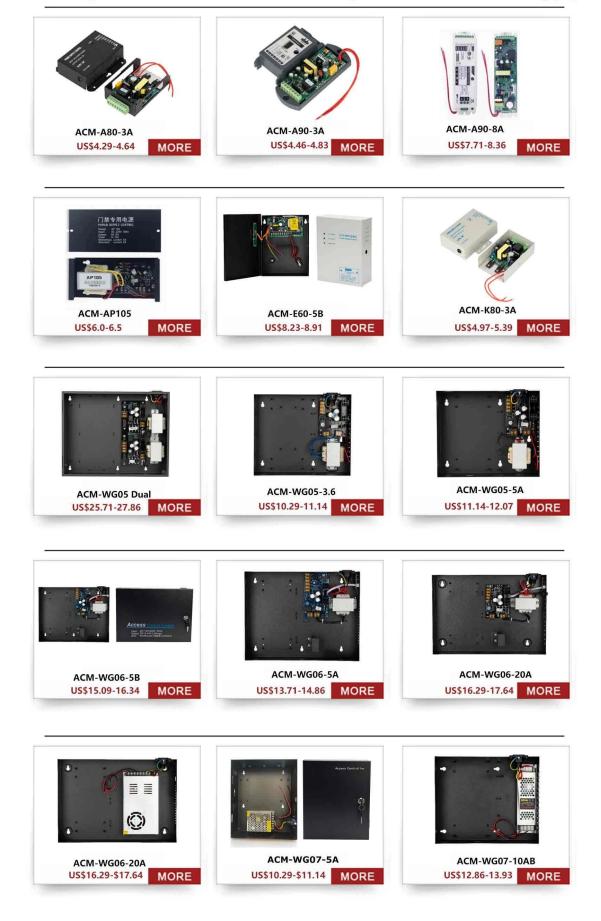

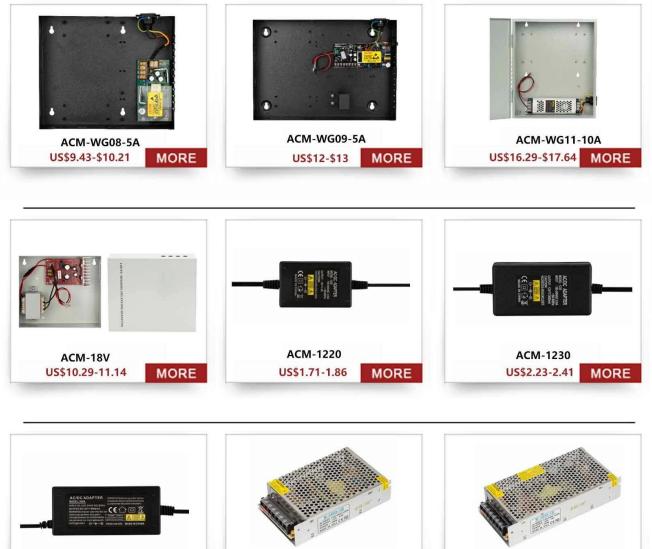









ACM 12V5A

US\$7.71-8.36




lily@goldbridgesz.com S facebook **Lily Jiang**

MORE

sales@goldbridgesz.com

You May Need

Complete Door Access Control Solution Provider

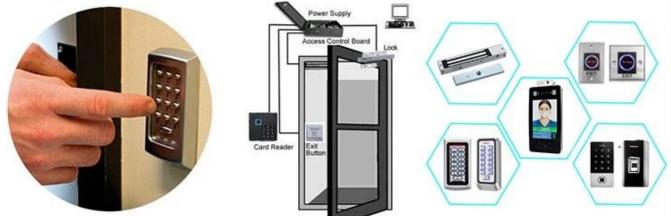






RFID Reader







Access Control Reader

Our Service

- 1, Any inquires will be replied within 24 hours
- 2, Professional manufacturer and supplier, Welcome to visit our website and our factory
- 3, OEM/ODM Available
- 4, High quality, fashin desing, reasonable & competitive price, fast lead time
- 5, After-sale Service :
- 1), All products will have been strictly quality checked in house before packing
- 2), All products will be well packed before shipping
- 3), All our products have 2-3 year warranty if the damage is not caused by human
- 6, Faster delivery : Around $1 \sim 5$ days for sample order, $7 \sim 30$ days for bulk order
- 7, Payment : You can pay for the order via : T/T, Western Union, Paypal

FAQ

Q: 1. How can I place an order?

A: Please list your requirement to us via Email. Then we will send the offer to you at earliest time, after order confirmation, we will arrange production ASAP.

- Q: 2.What about the payment and shipment?
- A: T/T ,Paypal, Western Union.

Clients can choose by sea, air or express(DHL, FedEx, TNT UPS etc.)

Q: 3. How can i get a sample to check your quality?

A:We could provide free sample to you, and the freight cost payed by you.

Q:4. How long can I expect to get the samples?

A: It depends on the quantity. Normally 3-7 days for 5000pcs and 7-15 days for 100,000pcs

Q:5. Can your products be customized?

A: Almost all of your products are customized ,including the materia, size, thickness and printing. OEM orders are highly welcome.

Q:6.Are you a trading company or factory?

We are the one of the biggest manufacturer of RFID cards/NFC tags/RFID keybod /RFID wristband[]rfid reader and access control products in China more than 20 years.