

180 型 180 型 EM 5 型

型番: ACM-Y180


型番: ACM-Y180

型番: ACM-Y180

型番: ACM-Y180


型番	200Lx41.7Wx21.7H (mm)
型番	130Lx33Wx10.5H (mm)
型番	180 (350) (mm)
型番	DC12V / DC24V (型番 24 (mm))
型番	12V / 280mA 24V / 150mA
型番	EL-350TS
型番	型番 24 (mm)
型番	≤20 (mm)
型番	-10 °C ~ 55 (型番 131 ~ 型番 14) (mm)
型番	0 ~ 90 (mm)
型番	型番 24 (mm)
型番	型番
型番	型番
型番	1.2 (mm)
型番	20 (mm)

Installation fitting for electromagnetic lock support

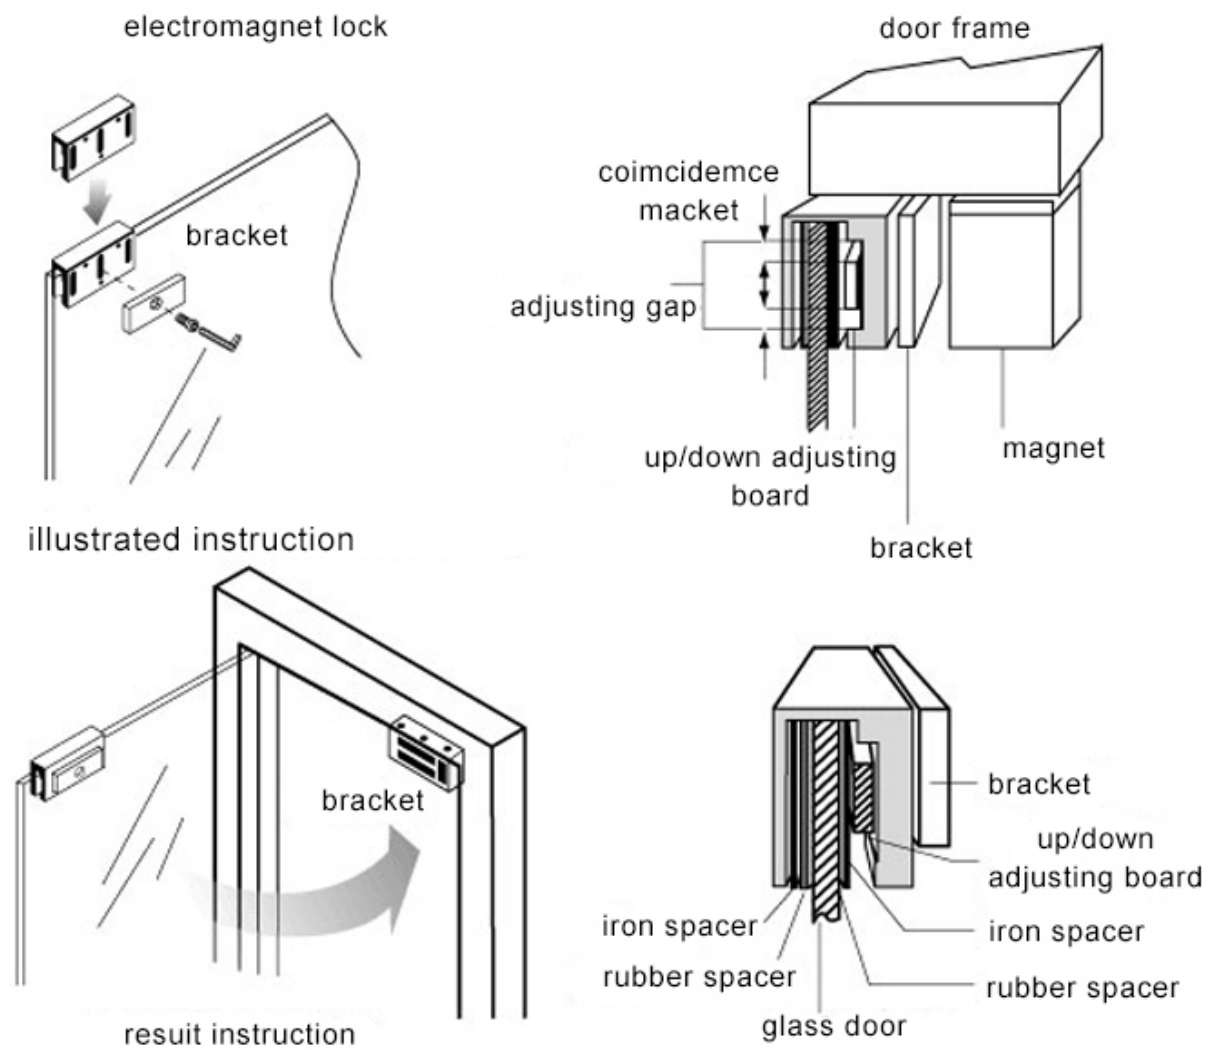


STANDARD INSTALLATION STEPS


Professional guidance, Rest assured



1 Fold the plate to 90° .




2 Close the door first, then place the upper side of template on door frame, while adjust the left side next to the door leaf.




3 Mark screw positions of armature plate and magnetic lock on door leaf and door frame respectively.




4 Drill holes based on the marked positions.




5 Make a combination based on the picture.



6 Strike the pin into the armature plate slightly (to avoid movement).




7 Make a combination based on the picture (add washer accordingly). The rubber ring must be added.




8 Place the rubber ring between armature plate and door leaf.




9 Use Allen key to remove the mounting plate from lock body.




10 Fix the mounting plate on the door frame according to the holes drilled earlier.




11 Use Allen key to screw the lock body on the mounting plate.




12 Close the door to test holding force. The angle between armature plate and magnetic lock can be adjusted by adding or reducing washers.




13 After all the appropriate procedures, the holding force can be maximized. Finally, fix the tamper screw.



Hollow Metal Door
Drill a hole
Inside: Diameter is 8mm
Outside: Diameter is 16mm



Wooden Door
Drill a hole
Inside: Diameter is 8mm
Outside: Diameter is 12.7mm



Metal Surface Door
6.8mm for M8-1.25thread
Inside: Drill a hole diameter is 8mm folding the plastic straight pin

Notice:

Thickness of Door Leaf:

350LBS: 44mm

600LBS: 50mm

800LBS: 48mm

1200LBS: 46mm

□□□□□□□□ □□□□□□□□

□□□□□ □□□□□

□□ □□□ □□□□□ □□□□□ DHL □ FEDEX □ TNT □ UPS □ EMS □ Forwarder by SEA □ AIR

.□□ □□□□□ □□□□□ □□□□ □□□□□ □□□□□ □□□□□

□□□□□□□□ □□□□□□□□

□ □□□□□□□ □□ □□□ 10 □ □□□□□ □□□ □□□□ 1 :□□□□□□□□ □□□ □□□□□

□□□□□ □□□ □□□□□ 50 .□□□ 46 :□□□□□□□□□ □□□□□ □ □□ 10 * 26 * 26 :□□□□□□□□ □□□□





ACM-Y280N

/ □□□ 280) □□□□□ □□□□ □□□□□□□□ □□□
 □□□ □ □□□□ □□□ :□□ □□□□□ (□□□ 600
 □□□□□ □□□ | □□□□ □ □□□□□ □□□ □ □□□□□□

ACM-Y180

(□□□ 300 / □□□ 180) □□□□□ □□□ □□□□
 :□□ □□□□□.□□□□ □□□□□ 2 □□□□□□□□□ □□□
 □ □□□□□ □□□ □ □□□□□ □□□ □ □□□□ □□□
 □□□□□□ □□□□□ □□□.

ACM-Y280

280 በሕግጋዊነት ስራ (ጥቅም 600) ስራ
 ለ ስራው ስራ :ሰዓት ስራውን በሰራው ስራው
 በሰራው ስራ ለ ስራው ስራ ለ ስራው ስራ
 በሰራው.

**ACM-Y350**[illegible]

ACM-Y500

□□□ 500 □□□□□□ □□□□□ □□□□□□□□ □□□

□□□ □ □□□□ □□□ :□□ □□□□□ (□□□ 1000)
□□□□□ □□□ □ □□□□□ □□□ □ □□□□□
□□□□□□.

ACM-Y280-W

□□□ 280 □□□□□□ □□□□□ □□□□□□□□□ □□□
□□□ :□□ □□□□□ □□□□□ □□□□□ (□□□ 600)
□□□ □ □□□□□ □□□ □ □□□□□ □□□ □ □□□□
□□□□□□ □□□□□□.

You may need



ACM-Y100S

5) 0000000000 00000000 000(PIN) 000
00000 0000000000 00000000 00000 00
0000000000

ACM-Y130

0000000000 00000000 000 (NC /
NOOptional)

110 :000000 000x28x31 000 0000

ACM-Y066

0000 000) 000 000 000)

130 :000000 000x98x41mmWorking

00000000000 000000 000 00 000000 000000



ACM-Y180-L

□□□ L □□□ 180 □□□□□□□□ □□□□

ACM-Y180ZL

□□□ ZL 300 / □□□ 180 □□□□□□□□ □□□□
□□□

ACM-Y180-ZL

□□□ ZL □□□ 180 □□□□□□□□ □□□□

□□□□□□

1 □ □□□□ 24 □□□□ □□ □□□□□□□□ □□ □□□ □□□□

□□□□□□□ □□□□□□□ □□□□ □□ □□□□□ □□□□□ □□ □□□ □□□□□ □ □□□□□ □□□□□□□ □□□□□□ □ 2

3 □ OEM / ODM □□□□

□□□□□ □ □□□□□ □□□□ □ 4 fashin □ □□□□□ □□□□ □ □□□□□□□□ □□□□□ □□□

:□□□□□ □□□ □□ □□□□ □ 5

□□□□□□□ □□□ □□□□□□ □□ □□□□ □□□ □□□ □□□ □ (1

□□□□□ □□□ □□□ □□□□ □□□□ □□□ □□□ □□□□□□□ □□□□ □ (2

□□□□□□ □□ □□□□□ □□□□□ □□□ □□ □□□ □□□□□ □□□□ □□□ □ (3

□□□□□□ □□□□□ □□□□ 30 ~ 7 □ □□□□□ □□□□□ □□□□ 5 ~ 1 □□□□□ : □□□□ □□□□□ □ 6

□□□ □□□□□ □□□□□ □□□□□ :□□□□□ □ 7: T / T □ □□□ □□□ □ □□□□□ □□□□□□

□□ □□□ □□□□□ □□□□□ □ 8 DHL □ FEDEX □ TNT □ UPS □ EMS □ Forwarder by SEA □ By AIR □ □□□□□ □□□□□

□□ □□□□□ □□□□□ □□□□□□.