

19 L x 19 L 6 W 8 H () 28 () 12 / 24 V D C :

[illegible]

☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☒ ☐ ☐ NO / NC / COM / -

$\frac{V}{D} = \frac{\pi^2}{6}$

[illegible]

□
□
□
□
□
:

□□□□□□ □□□□□□


- .□□□ 600 □□□□ 280 □□□□□ □□□□□□□□
- .(□□□□□□□□) □□□□□ □□□□ □□□□ 24 □□ 12 □□□□□□□□ □□□□□□ -
- 12 □□ □□□□□□□□ □□□□□ -VDC .□□□□□□□□□ □□□
- - MOV .□□□□□□□□ □□□□□□□□ □□□□□□□□
- □□□□□□□ □□□□□□□□ □□□□□ □□□□□□□□ □□□□□ □□□□□□□ □□□□□ □□□□□□□□ -.
- LED .□□□□□□ □□□□ □□□□ □□□□
- □□□□ □□□□□□□ - (NO/NC/COM)
- □□□□□ □□□□ □□□□□□□ (NO/NC/COM)
- .□□□□□□□□ □□□□ □□□□□□□□□ □□□□□□
- .□□□□□□□□ □□□□□□□□□□ □□ □□□□ □□□□□□□ □□□□□ □□□□□ -
- .□□□□□□□□□ □□□ □□□□□ □□□□□□ -
- .□□□□□□ □□□□ □□□□ □□□□□□□□□ □□□ □□□□□□ -
- - CE □□□□□□ □□□□□□□□□□ □□□□□□ □□ MA □□□□□□□ □□□□□ □□□□□ □□□□□ □□□□ □□

□□□□□□ □□□□□ OEM/ODM □□□□□□□□





00000000 00000 000 0000000 000000 **LED** 000000000 00000 000000 00000 0000000 00000000 0000000 00000000
 .0000000 0000000 0000000 00000 . 00000000 00000 0000000 00000
 00 00 000-Y280 00000 0000000 00000 00 00000000 .00000000 000000 00000 000000 00000 .0000000 0000000 00000
 00000 00 000000000 00000000 .000000 7 000000 000 00000 24 0 00000 12 000000 **PCB** 00000 000 000 .0000000000
 0000000 00000000000 0000000000 0000 00000 00000 0000 0000000 0000000000 00000 000000000 0000000 0000000 0000000 00
 00000000000 00000 0000000 0000 00.

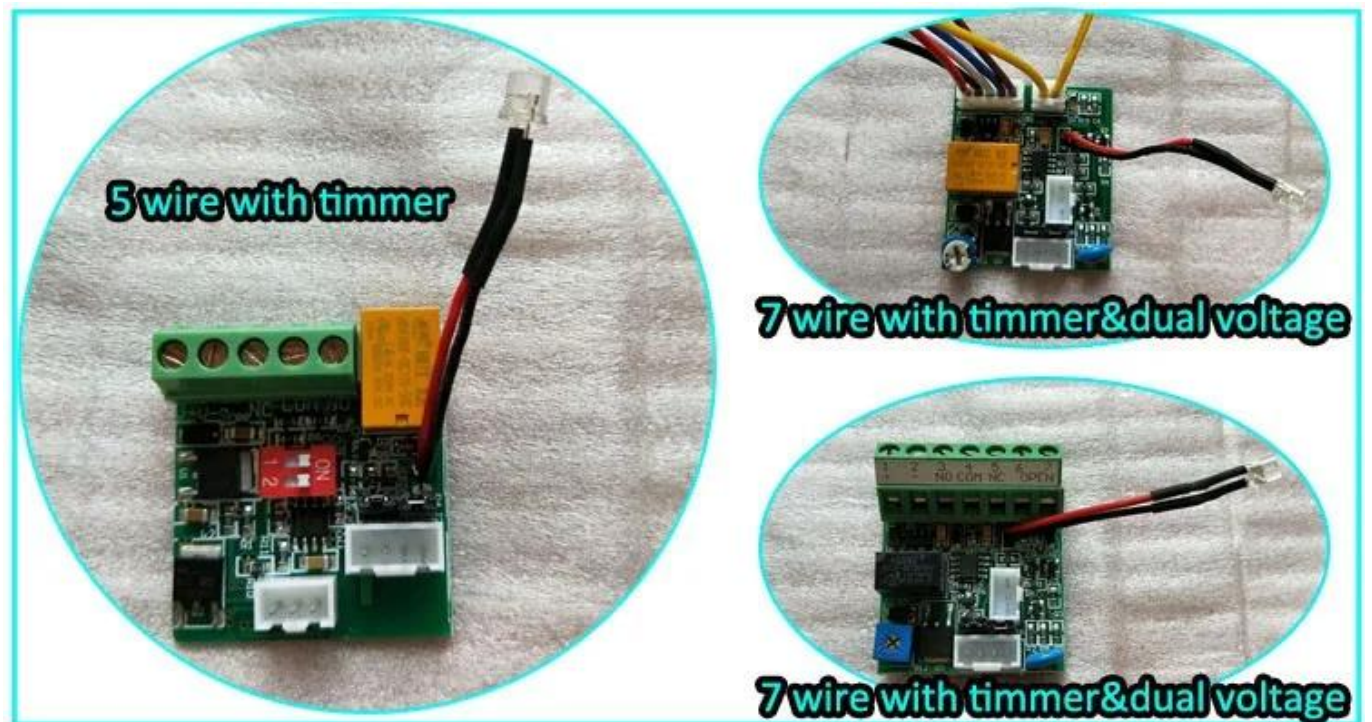

- ٲٲٲٲٲ ٲٲٲٲٲٲٲٲ ٲٲ ٲٲ ٲٲٲٲٲٲٲ ٲٲٲٲٲ ٲٲٲ ٲٲٲ ٲٲٲٲٲٲٲ ٲٲٲٲ ٲٲٲٲٲٲٲ ٲٲٲٲ ACM Goldbridge ٲٲٲٲٲ ٲٲٲٲ ٲٲٲٲٲٲٲٲ .ٲٲٲٲٲٲ ٲٲٲ ٲٲٲٲٲٲٲٲٲ

ٲٲٲٲٲ ٲٲٲٲٲٲ ٲٲٲٲٲ ٲٲ ٲٲٲٲٲٲ ٲٲٲ - ACM Goldbridge .ٲٲٲٲٲٲٲٲ ٲٲٲٲ ٲٲ ٲٲٲٲٲٲٲ ٲٲٲٲ ٲٲٲٲٲٲٲٲ ٲٲٲٲٲ ٲٲٲٲٲ ٲٲٲٲ ٲٲٲٲٲ ٲٲٲٲٲٲٲٲٲٲٲٲٲٲ ٲٲ ٲٲٲٲٲ -.

□□□□□□ □□□□

STANDARD INSTALLATION STEPS

Professional guidance, Rest assured



1 Fold the plate to 90° .



2 Close the door first, then place the upper side of template on door frame, while adjust the left side next to the door leaf.



3 Mark screw positions of armature plate and magnetic lock on door leaf and door frame respectively.



4 Drill holes based on the marked positions.



5 Make a combination based on the picture.



6 Strike the pin into the armature plate slightly (to avoid movement).



7 Make a combination based on the picture (add washer accordingly). The rubber ring must be added.



8 Place the rubber ring between armature plate and door leaf.



9 Use Allen key to remove the mounting plate from lock body.



10 Fix the mounting plate on the door frame according to the holes drilled earlier.



11 Use Allen key to screw the lock body on the mounting plate.



12 Close the door to test holding force. The angle between armature plate and magnetic lock can be adjusted by adding or reducing washers.



13 After all the appropriate procedures, the holding force can be maximized. Finally, fix the tamper screw.



Hollow Metal Door
Drill a hole
Inside: Diameter is 8mm
Outside: Diameter is 16mm



Wooden Door
Drill a hole
Inside: Diameter is 8mm
Outside: Diameter is 12.7mm



Metal Surface Door
Inside: Drill a hole
diameter is 8mm folding
the plastic straight pin

Notice:

Thickness of Door Leaf:

350LBS: 44mm

600LBS: 50mm

800LBS: 48mm

1200LBS: 46mm

□ □ □ □ □ □ □ □ □ □

በጣም በፈጠራ ማሸናፊያ DHL, FEDEX, TNT, UPS, EMS በአለም አቀፍ የጭነት መጓዝ አገልግሎት ይሰጣሉ።

□ □ □ □ □ □ □ □ □ □ □ □ □ □ □ □

□□□□□□ □□□ □□□□ 12 □□□□□□ □□□ □□□□□ □□□□ :□□□□□□□□ □□□□ □□□□□□□□ □□□□□□□□

□□□□ □□□ □□ □□□□ 50 .□□□ 25 :□□□□□□□ □□□□□ □□□19.3*13.5*54.3 : □□□□□ □□□□□ □□□





□□ □□ □□-Y280N

280) □□□□ □□□□ □□□□□□□□ □□
 □□□□ □□ :□□ □□□□ (□□□ 600/□□□
 □□□ |□□□□ □□□□□□ □□□ □□□□□□ □□□
 □□□□□□

□□ □□ □□-Y180

180) □□□□ □□ □□□□ □□□□□□□□ □□
 .□□□□□ □□ □□□ □□□□□ 2 (□□□ 300/□□□
 □□□ □□□□□□ □□□ □□□□□ □□□ :□□ □□□□□

ACM-Y280 280mm 280mm 280mm 280mm.

ACM-Y280

280mm 280mm 280mm 280mm 280mm 280mm :280mm (280mm 600) 280mm 280mm 280mm 280mm 280mm 280mm.



ACM-Y350

350mm 350mm 350mm 350mm 350mm 350mm :350mm (350mm 800) 350mm 350mm 350mm 350mm 350mm 350mm.

🔑 📏 📏-Y500

📏 500 📏📏 📏📏 📏📏📏📏 📏📏
📏📏 📏📏📏 📏📏 :📏 📏📏📏 (📏📏 1000)
📏📏📏 📏📏 📏📏📏📏 📏📏 📏📏📏📏
📏📏📏📏.

🔑 📏 📏-Y280-W

📏 280 📏📏 📏📏 📏📏📏📏 📏📏
📏📏 :📏 📏📏📏 .📏📏📏📏 📏📏📏 (📏📏 600)
📏📏 📏📏📏📏 📏📏 📏📏📏📏 📏📏 📏📏📏
📏📏📏📏 📏📏📏📏.

You may need



00 00 000-Y100S

5) 0000000000 00000000 0000(PIN) 000000
0000000000 0000 00 000 00000000

00 00 000-Y130

0000000000 0000000 000

(NC/NO(0000000000

000 31 × 28 × 110 :000000 000

00 00 000-Y066

0000000 000) 000000 000000 000000)

130 :000000 000x98x41mm 000000

!!!00000 3 00000 00000000000 000000 0000 000000000 0000000 000000 000000

0000000 0000000 00 00000000 000000000 000000000 0000000 0000000000 00 000000 00000 0000000000 00 0000000 20 00000000 00000000
!00000 "000000" 0000 00000 00 000000000 0000000000 00000000 0000000 00 00000 !0000000 00 00000000 00000 0000000 00 00000
0000000000 00 00000000 000000 00000 00 0000 0000000 00 000000 00000000 00000000 000000 00000 000000 00000.

0000000 00000000000 0000 00 0000000 0000000





鋼 鋼 鋼-Y280-L

鋼 L 350/鋼 280 鋼鋼鋼鋼鋼 鋼鋼
 鋼

鋼 鋼 鋼-Y280Z

鋼鋼 Z 鋼 280 鋼鋼 鋼鋼鋼鋼鋼 鋼鋼

鋼 鋼 鋼-Y280-ZL

鋼鋼 ZL 350/鋼 280 鋼鋼鋼鋼鋼 鋼鋼
 鋼

鋼鋼鋼鋼

1 鋼 鋼 24 鋼鋼 鋼 鋼鋼鋼鋼鋼鋼 鋼 鋼 鋼鋼 鋼鋼

鋼鋼鋼鋼 鋼鋼鋼鋼鋼 鋼鋼 鋼鋼鋼鋼 鋼鋼鋼 鋼 鋼鋼 鋼鋼鋼 鋼鋼鋼鋼鋼 鋼鋼鋼鋼鋼 鋼鋼鋼鋼鋼 鋼鋼鋼鋼 鋼2

鋼鋼鋼鋼鋼 鋼鋼鋼鋼鋼 鋼鋼鋼鋼鋼 鋼鋼鋼鋼/鋼鋼鋼鋼鋼 鋼鋼鋼鋼鋼 鋼鋼鋼鋼 鋼3

鋼鋼鋼 鋼鋼 鋼鋼鋼鋼鋼鋼 鋼鋼鋼 鋼鋼 鋼鋼鋼鋼 鋼鋼鋼 鋼鋼鋼鋼 鋼鋼鋼 鋼4

:鋼鋼鋼 鋼鋼 鋼 鋼鋼鋼 鋼5

鋼鋼鋼鋼鋼 鋼鋼 鋼鋼鋼鋼 鋼 鋼鋼鋼 鋼鋼鋼鋼鋼鋼 鋼鋼鋼 鋼鋼鋼 鋼鋼 鋼鋼鋼 鋼 (1

鋼鋼鋼 鋼鋼 鋼鋼 鋼鋼鋼 鋼鋼鋼 鋼鋼 鋼鋼鋼鋼鋼鋼 鋼鋼鋼鋼 鋼(2

鋼鋼鋼鋼鋼 鋼 鋼鋼鋼鋼 鋼鋼鋼鋼 鋼鋼 鋼鋼 鋼鋼鋼鋼 3-2 鋼鋼鋼 鋼鋼鋼 鋼鋼鋼鋼 鋼鋼鋼鋼鋼 鋼鋼鋼 鋼(3

鋼鋼鋼鋼鋼 鋼鋼鋼鋼 鋼鋼鋼 30 ~ 7 鋼鋼鋼鋼鋼 鋼鋼鋼鋼 鋼鋼鋼 5 ~ 1 鋼鋼鋼 : 鋼鋼鋼鋼鋼 鋼鋼鋼 鋼6

鋼鋼 鋼鋼鋼鋼 鋼鋼鋼鋼 鋼鋼鋼鋼 :鋼鋼鋼鋼 鋼7: T/T 鋼 Western Union 鋼 Paypal 鋼

8 鋼 鋼 鋼鋼鋼 鋼鋼鋼鋼 :鋼鋼鋼鋼 DHL 鋼 FEDEX 鋼 TNT 鋼 UPS 鋼 EMS 鋼鋼鋼鋼 鋼鋼鋼鋼 鋼鋼鋼鋼 鋼鋼鋼鋼 鋼鋼鋼 鋼 鋼鋼鋼鋼 鋼鋼鋼
 鋼 鋼鋼鋼鋼 鋼鋼鋼鋼 鋼鋼鋼鋼鋼.