



5 00U LED

Y-500U

1
8
5
L
x
2
5
W
X
3
7
H

[illegible]


□□□□OEM / ODM□□



UW-500U-LED

Feature: Fail Safe
Face Plate: 185Lx25.7Wx37H(mm)
Bolt: 16(length)x12.7(diameter)(mm)
Voltage: DC12V
Start Current: 960mA

Standby Current: 180mA
Solid Bolt : polishing housing, 1000Kg Holding Force
Suitable For: Electric Bolt For Narrow Door
Signal Output: Door status Output,NO/COM
Surface Temp: Low Temperature
Induction Distance: 8mm
Special Designed: Tested to 500000 operations
Plate material: Stainless Steel
Weight: 1.2kg

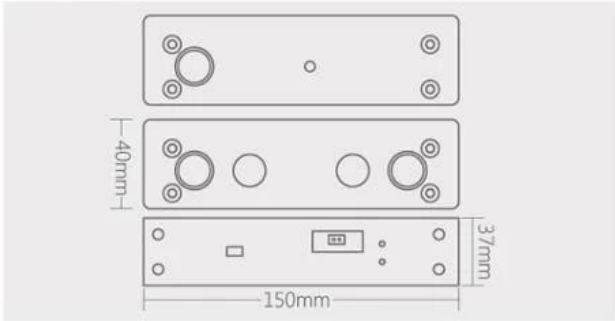

□□□□□□□□




- 2019 ACM Goldbridge 2019
- 2019 ACM Goldbridge 2019
- 2019 ACM Goldbridge 2019




STANDARD INSTALLATION STEPS


Professional guidance, Rest assured



1 Fold the plate to 90° .




2 Close the door first, then place the upper side of template on door frame, while adjust the left side next to the door leaf.




3 Mark screw positions of armature plate and magnetic lock on door leaf and door frame respectively.




4 Drill holes based on the marked positions.




5 Make a combination based on the picture.



6 Strike the pin into the armature plate slightly (to avoid movement).




7 Make a combination based on the picture (add washer accordingly). The rubber ring must be added.




8 Place the rubber ring between armature plate and door leaf.




9 Use Allen key to remove the mounting plate from lock body.




10 Fix the mounting plate on the door frame according to the holes drilled earlier.




11 Use Allen key to screw the lock body on the mounting plate.




12 Close the door to test holding force. The angle between armature plate and magnetic lock can be adjusted by adding or reducing washers.




13 After all the appropriate procedures, the holding force can be maximized. Finally, fix the tamper screw.



Hollow Metal Door
Drill a hole
Inside: Diameter is 8mm
Outside: Diameter is 16mm



Wooden Door
Drill a hole
Inside: Diameter is 8mm
Outside: Diameter is 12.7mm



Metal Surface Door
Inside: Drill a hole
diameter is 8mm folding
the plastic straight pin

Notice:

Thickness of Door Leaf:

350LBS: 44mm

600LBS: 50mm

800LBS: 48mm

1200LBS: 46mm

□□□□

□□□□
□□□DHL□FEDEX□TNT□UPS□EMS□SEA□Air□□□□□□□□□□□□□□
□□□□□□□□□□□□□□

□□
□□□□□□1□□□□20□□
□□□□ □ 52 * 29 * 12□□□□□□13.6□□□□□□50□□□□



You may need



ACM-Y100S 2PIN

□□□□□

□□100MA / □□900MA Power □□2PIN

ACM-Y100S 5PIN

□□□□□

□□□□□□□□□□□□□□5PIN

ACM-Y500A

□□□□□□□□□□□□□□205x30x38mm



ACM-Y280

□□□□□□□□280□□/ 600□□

ACM-Y131

□□□□□□□□NC / NO□□□□□□□□□□PVC□

ACM-Y066

□□□□□□□□□□
□□□□130x98x41mm□□

服務項目

1. 24小時服務熱線
2. 專業技術團隊為您提供專業服務
3. OEM / ODM服務
4. 專業技術團隊為您提供專業服務
5. 專業技術團隊為您提供專業服務
1. 專業技術團隊為您提供專業服務
2. 專業技術團隊為您提供專業服務
3. 專業技術團隊為您提供專業服務 2 - 3 個月
6. 專業技術團隊為您提供專業服務 1~5 個月 7~30 天
7. 專業技術團隊為您提供專業服務 T / T Western Union Paypal
8. 專業技術團隊為您提供專業服務 DHL FEDEX TNT UPS EMS SEA Air 專業技術團隊為您提供專業服務

服務項目

1. 專業技術團隊為您提供專業服務
 2. 專業技術團隊為您提供專業服務
 3. 專業技術團隊為您提供專業服務
 4. 專業技術團隊為您提供專業服務
 5. 專業技術團隊為您提供專業服務
 6. 專業技術團隊為您提供專業服務
- 專業技術團隊為您提供專業服務 3-9 個月 5000pcs 7-15 天 100,000pcs
- 專業技術團隊為您提供專業服務 OEM 專業技術團隊為您提供專業服務
- 專業技術團隊為您提供專業服務 RFID / NFC / RFID / RFID rfid 專業技術團隊為您提供專業服務 20 天