



□□□□□□□□□□□□□□□□ **U** □□□

Y-500U

[illegible]



UW-500U-LED

Feature: Fail Safe

Face Plate: 185Lx25.7Wx37H(mm)

Bolt: 16(length)x12.7(diameter)(mm)

Voltage: DC12V

Start Current: 960mA

Standby Current: 180mA

Solid Bolt : polishing housing, 1000Kg Holding Force

Suitable For: Electric Bolt For Narrow Door

Signal Outpu: Door status Output,NO/COM


Surface Temp: Low Temperature

Induction Distance: 8mm

Special Designed: Tested to 500000 operations

Plate material: Stainless Steel



Weight: 1.2kg

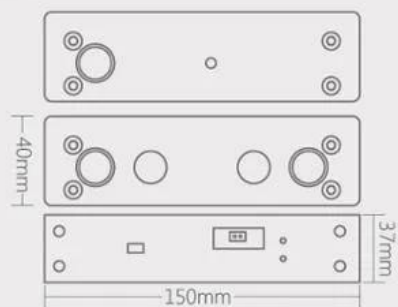




STANDARD INSTALLATION STEPS


Professional guidance, Rest assured



1 Fold the plate to 90° .




2 Close the door first, then place the upper side of template on door frame, while adjust the left side next to the door leaf.




3 Mark screw positions of armature plate and magnetic lock on door leaf and door frame respectively.




4 Drill holes based on the marked positions.




5 Make a combination based on the picture.



6 Strike the pin into the armature plate slightly (to avoid movement).




7 Make a combination based on the picture (add washer accordingly). The rubber ring must be added.



8 Place the rubber ring between armature plate and door leaf.




9 Use Allen key to remove the mounting plate from lock body.



10 Fix the mounting plate on the door frame according to the holes drilled earlier.




11 Use Allen key to screw the lock body on the mounting plate.




12 Close the door to test holding force. The angle between armature plate and magnetic lock can be adjusted by adding or reducing washers.




13 After all the appropriate procedures, the holding force can be maximized. Finally, fix the tamper screw.



Hollow Metal Door
Drill a hole
Inside: Diameter is 8mm
Outside: Diameter is 16mm



Wooden Door
Drill a hole
Inside: Diameter is 8mm
Outside: Diameter is 12.7mm



Metal Surface Door
Inside: Drill a hole
diameter is 8mm folding
the plastic straight pin

Notice:

Thickness of Door Leaf:

350LBS: 44mm

600LBS: 50mm

800LBS: 48mm

1200LBS: 46mm

□□□□

□□□□

□□□ DHL□FEDEX□TNT□UPS□EMS□□□□□□□□□□□□
□□□□□□□□□□□□

□□

Bolt Lock□□□□□1□□□□20□□
□□□□□52*29*12c□□□□□14□□□□□□ 50 □



□□□□

3

20 “ ”



ACM-Y100S 2PIN

100MA/900MA 2PIN

ACM-Y500A

NC

ACM-Y100S 5PIN

□□□□□□□□□□□□5PIN

You May Need



ACM-Y280

□□□□□□□□280□□/600□□

ACM-Y100S

□□□□□□□□NC/NO□□□□□□□□□□PVC□

ACM-Y066

□□□□□□□□□□

□□□□130x98x41mm□□

□□□□□□



ACM-Y700

□□□□□□□□□□

ACM-Y600

□□□□□□□□□□□□

ACM-Y601

□□□□□□□□

□□□□□□□□□□



ACM-WEG02

2通道模块(RS232/RS485/TCP/IP)

ACM-K2A

Realese模块K2A 115 * 40mm; K2B 86 * 86mm

ACM-Y806-3A

12V/3A

- 1) 24시간
2) OEM/ODM
3) 2-3년
4) 1~5년
5) 7~30년
6) T/T, Paypal
7) DHL, FEDEX, TNT, UPS, EMS
8) ACM Goldbridge 2년

ACM 1111111111

[illegible]