

D + P Ι N 5 K G 1 9 X 1 2 5 X 5 5 m m

- 2.supports . _ _ _ 26 _ _ _ 26 _ _ _ 26 _ _ _ 26 _ _ _ 26 _ _ _ 27 _ 28 _ _ 27 _ 28 _ _ _ 28 _ 28 _ _ 28 _ _ 28

Product function Touch panel, doorbell button Metal case with blue backlight WG26/34 input/output Support Card, Pin, Card + PIN Full programming from the keypad Humanized tamper alarm function Can set up a management card Active and passive lock signal output Imported double point relay output signal Contactless for RFID transponder technology Connection for external release button (Exit button) Memory capacity: 8000 user cards and 1 passwords Does not need to connect on computer, it can works alone The same series of access control support data copy and backup. Can be used when the password read head and one machine

Welcome To Goldbridge Ltd








صورة مفصلة







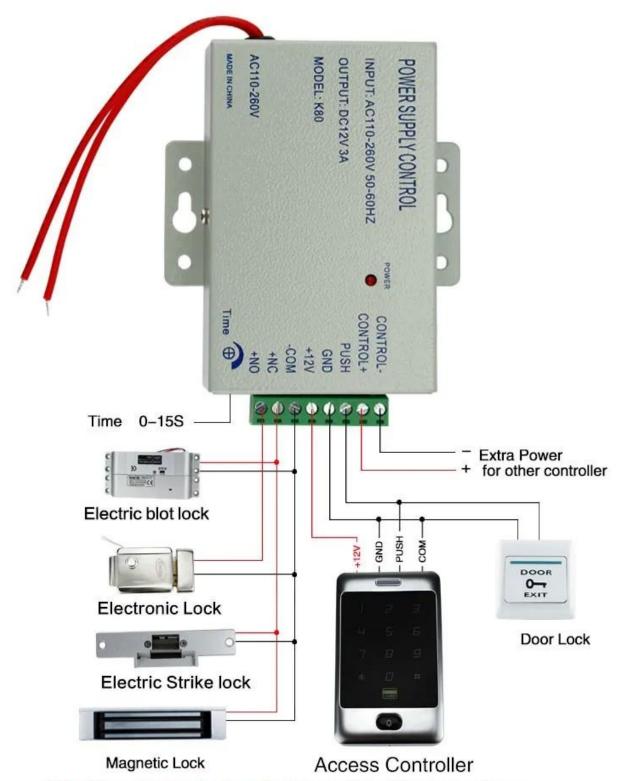

Attention when electronically contrlled lock must be transferred to 0seconds delay,to prevent burning of electric lock.

نحن شركة مصنعة لمراقبة الدخول ، لدينا نظام كامل لمراقبة الدخول المنتج على النحو التالي:







ACM223

ACM209-NW

Keypad Metal RFID $\bigcirc \bigcirc \bigcirc \bigcirc$ $\bigcirc \bigcirc$ AccessControl (125 $\bigcirc \bigcirc \bigcirc \bigcirc$ $\bigcirc \bigcirc \bigcirc$ Khz EM

ACM208

000 RFID 000000 00 000000 0000 000 0000000







ACM210

ACM225

ACM211B

3 [] OEM / ODM [][[][[][[][]

:00000 000 00 0000 0 5

000000 00000 0000 30 \sim 7 0 000000 00000 5 \sim 1 00000 : 000000 0000 0 6

0: **1**. 000 000 000 000 000 **.1**

\square

Q: 4. 000000 000 00000 00000 000

Q: 5. 000 000000 00000 00000

0: 6. 00 0000 0000 00 00