



ACM-K846 10 5-10 3A 36VDC 86x86 0.14

ACM-K846

Model	ACM-K846
Power supply	DC12V
Power consumption	10 W
Response time	5-10 ms
Rated current	3A @ 36VDC
Terminal	NC, COM
Dimensions	86x86 mm
Weight	0.14 kg

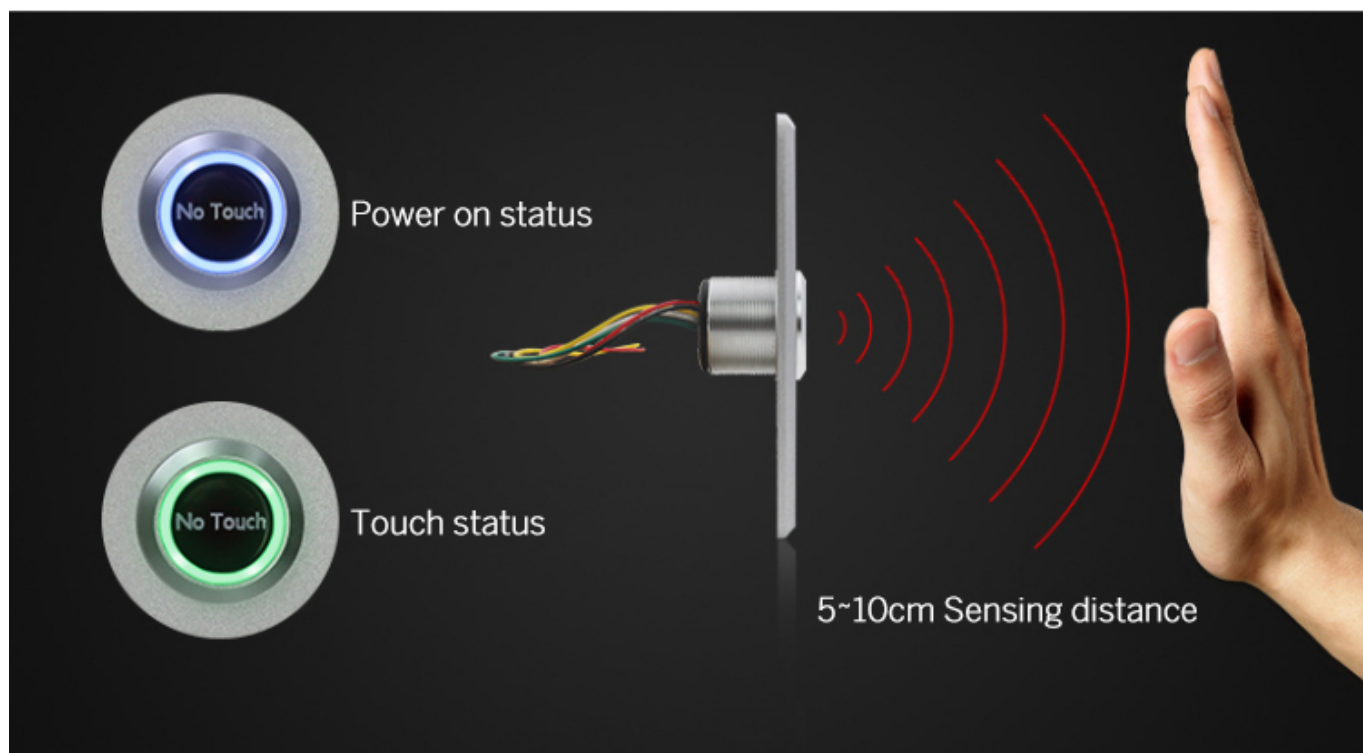

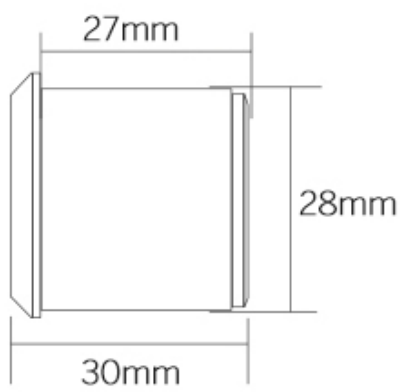



□□□□ □□ □□□□ □□ Relese □□□□□

K2B: 86 * 86 □□

□□□□ □□□□□□ □□□□ □□ Realese □□
□□□□□□

K9A: 115 * 40 □□□

□□□□□□□□ □□□□□□□□) □□□□□□ □□□□□□ □□
□□□□□□ □ NO / NC) K5B: 86 * 86 □□





1. 304 不銹鋼 (K4B) 86 * 86 毫米
 2. 304 不銹鋼 (K14B) 86 * 86 毫米
 3. 304 不銹鋼 (K815B) 86 * 86 毫米

服務承諾

1. 24 小時熱線服務
2. 專業技術團隊提供產品安裝、維修及保養服務
3. OEM / ODM 服務
4. 4 小時內提供產品安裝、維修及保養服務
5. 產品質量保證
6. 30 ~ 7 天免費退換貨服務
7. T / T 或 信用證
8. DHL, FEDEX, TNT, UPS, EMS, Forwarder by SEA, By AIR 等運輸方式

產品特點

1. 產品特點：堅固耐用、操作簡便、安裝快捷。
 2. 產品特點：外觀美觀、符合人體工學設計。

.0000 000 0000 00 00000000 0000000 000000 0 00000

00000000 000000 00 00000 .2 :

0: T / T 0 .0000000 0000000 0 000 0000

0000000 00 00000 00 0000000 00000 00 0000000000 00000000 00000 (DHL 0 FedEx 0 TNT UPS 0 (0000

00000000 00 0000000 00000 0000 00000000 00000000 0000 .3 :

.00000 00 0000000000 0000000 00000000 00000000 00000 00 00000 00 00000000 :0

0000000000 0000 00000000 0000000 00 000000000 0000 .4 :

00000 100000 0000000 0000000 15-70 00000 5000 0000000 00000 7 0000 3 00 00000 .00000000 0000 0000000 0000 :0

0000000000 0000000 00000 00 .5 :

0000000 .0000000000 0000000000 00000000 00000000 0000 00 0000 0 000000000 0000000000 00000 0000000 0000 :0 OEM

.0000000 00000

000000 00 00000000 00000 0000 00 .6 :

000000000 0000000000 0000000000 00000 00 0000000 0000 RFID / 000000000 NFC / 000000000 00000000 RFID / 000000 RFID
0 00000 RFID 000000 20 00 0000000 0000000 00 00000000 00 00000000 000000000.