


□□□□□□	86 × 86 × 20 □□□
□□□□□□ □□□□□□	□□□□□ □□ □ □□□□□ □□□□□□□ □□□□□□ □□□□□
□□□□□□ □□□□□□	3A □ 36VDC □□□□ □□□□
□□□□□□□ □□□□□□	+ 12V GND NO NC COM
□□□□□□□□□□ □□□□□□	1000000 □□□□□□ □□
□□□□□□ □□□□□□	□□□□□ □□□□
□□□□□□□ □□□□□□□ □□□□□	-10 ~ + 55 □□□□□□□□ 131-14) □□□□□□ □□□□□
□□□□□□□ □□□□□□	0-95□ (□□□□□□ □□□□□)



Touch status

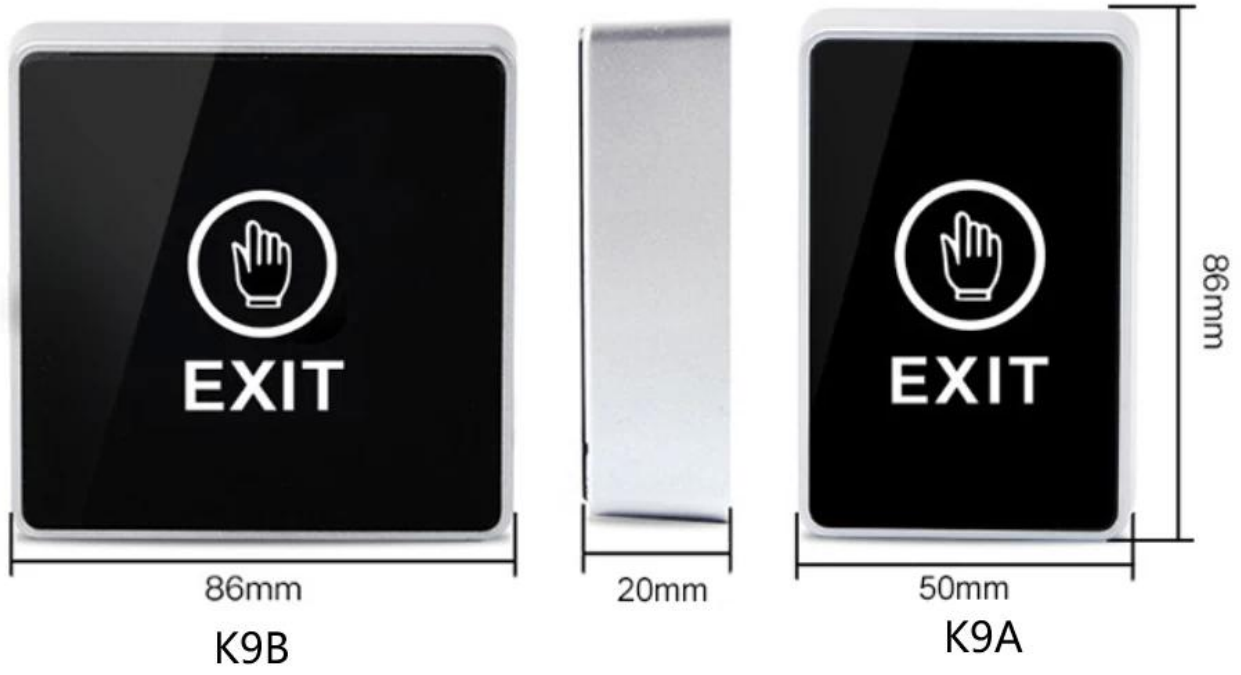

Power on status



Relese

K2B: 86 * 86

Relese

K9A: 115 * 40

)

NO / NC) K5B: 86 * 86



RFID 20