




280kgs / 600lbs $\hfill \hfill \hfil$

□□□□ Advanatge

- * .2 × 000 2600 × 000 280 00000 00000 00000
- 24 \bigcirc 12 \bigcirc 12 \bigcirc * VDC (.(\bigcirc
- 12 00 0000000 00000 *VDC .00000000 000
- ____ * MOV ._________
- * .00000 00000 00000 00000 *



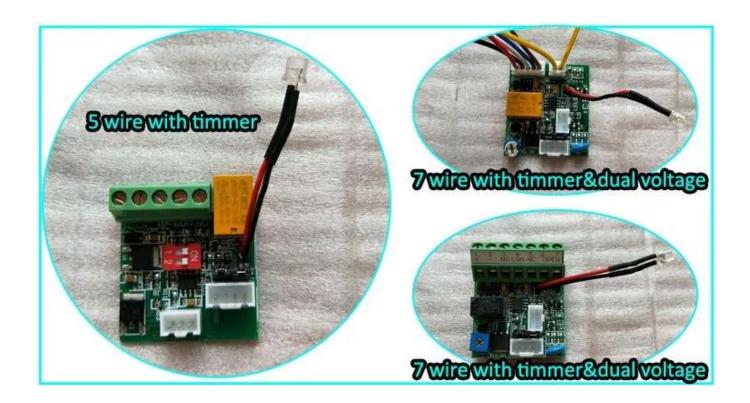

STANDARD INSTALLATION STEPS

Professional guidance, Rest assured





Fold the plate to 90°.



Close the door first, then place the upper side of template on door frame, while adjust the left side next to the door leaf.



Mark screw positions of armature plate and magnetic lock on door leaf and door frame respectively.



Drill holes based on the marked positions.



Make a combination based on the picture.



Strike the pin into the armature plate slightly (to avoid movement).



Make a combination based on the picture (add washer accordingly). The rubber ring must be added.



Place the rubber ring between armature plate and door leaf.



Use Allen key to remove the mounting plate from lock body.



Fix the mounting plate on the door frame according to the holes drilled earlier.



Use Allen key to screw the lock body on the mounting plate.



Close the door to test holding force. The angle between armature plate and magnetic lock can be adjusted by adding or reducing washers.



After all the appropriate procedures, the holding force can be maximized. Finally, fix the tamper screw.



Drill a hole Inside: Diameter is 8mm Outside: Diameter is16mm



Drill a hole Inside: Diameter is 8mm Outside: Diameter is 12.7mm



Inside:Drill a hole diameter is 8mm folding the plastic straight pin

Notice:

Thickness of Door Leaf:

350LBS: 44mm 600LBS: 50mm 800LBS: 48mm 1200LBS: 46mm







You may need



ACM-Y280N

ACM-Y180

ACM-Y280







ACM-Y280-L

000 L 000 350 / 000 280 0000000 0000

ACM-Y180ZL

000 ZL 300 / 000 180 0000000 0000

ACM-Y280-ZL

000 ZL 350 / 000 280 0000000 0000

خدمتنا

1 ، الصانع والمورد المهني ، مرحبا بكم في زيارة موقعنا على شبكة الإنترنت ومصنعنا ، 2 ، الصانع والمورد المهني ، مرحبا بكم في زيارة موقعنا على شبكة الإنترنت ومصنعنا ، 3 ، OEM / ODM متاح ، 4 fashin ، مهلة سريعة ، مهلة سريعة ، 4 بجودة عالية ، تصميم عقول وتنافسية ، مهلة سريعة ، 4 بجودة عالية ، تصميم . 5 ، خدمة ما بعد البيع: (1) ، سيتم فحص جودة جميع المنتجات بدقة في المنزل قبل التعبئة) ، بميع المنتجات سوف تكون معبأة بشكل جيد قبل الشحن (2) ، جميع منتجاتنا لها ضمان لمدة 2-3 سنوات إذا لم يكن الضرر ناتجًا عن الإنسان) ، جميع منتجاتنا لها ضمان لمدة 2-3 سنوات إذا لم يكن الضرر ناتجًا عن الإنسان) ، تسليم أسرع : حوالي 1 ~ 5 أيام لعينة النظام ، 7 ~ 30 يوما للطلب بالجملة ويسترن يونيون ، باي بال. ، 7 : T / T ، الدفع: يمكنك الدفع مقابل الطلب عبر يمكنك أيضًا اختيار وكيل الشحن ؛ By AIR و EMS و EMS و EMS و CDEL ، الشحن: لدينا تعاون قوي مع ...

التعليمات

0: **1**. 000 00000 00000 000 **.1**

0000000 00000 00 0000.2 :0

OOO OOO O OOOOOO OOOOOO OOOOOO OOOOOO O

0: S.

0.4:0

a: Dan Danca Da

0: 5. []

00000 00 000000 0000 000 00.6 : 0