

[illegible]


1. 100% LED . 100% 100% 100%
 2. 100% 100% 100% - (NO / NC / COM)
 3. 100% 100% 100% (NO / NC / COM)
 4. 100% 100% 100%
 5. 100% 100% 100% 100% 100% 100%
 6. 100% 100% 100% 100%
 7. 100% 100% 100% 100%
 8. 100% 100% 100% 100%
 9. CE 100% 100% 100% 100% 100% 100% 100% 100%

100% 100% OEM / ODM 100%



1. 100% LED 100% 100% . 100% 100% 100% 100% 100% 100% 100% 100%
 2. 100% 100% .

ACM-Y280N 100% 100% 100% . 100% 100% 100% PCB. 24 100% 12 100% 100% 100% 100%
 100% 100% 100% 100% . 100% 7 100% 100% PCB 100% 100% 100% 100% 100% 100%
 100% 100% 100% 100% 100% 100% 100% 100% 100% 100% 100% 100% 100% 100%

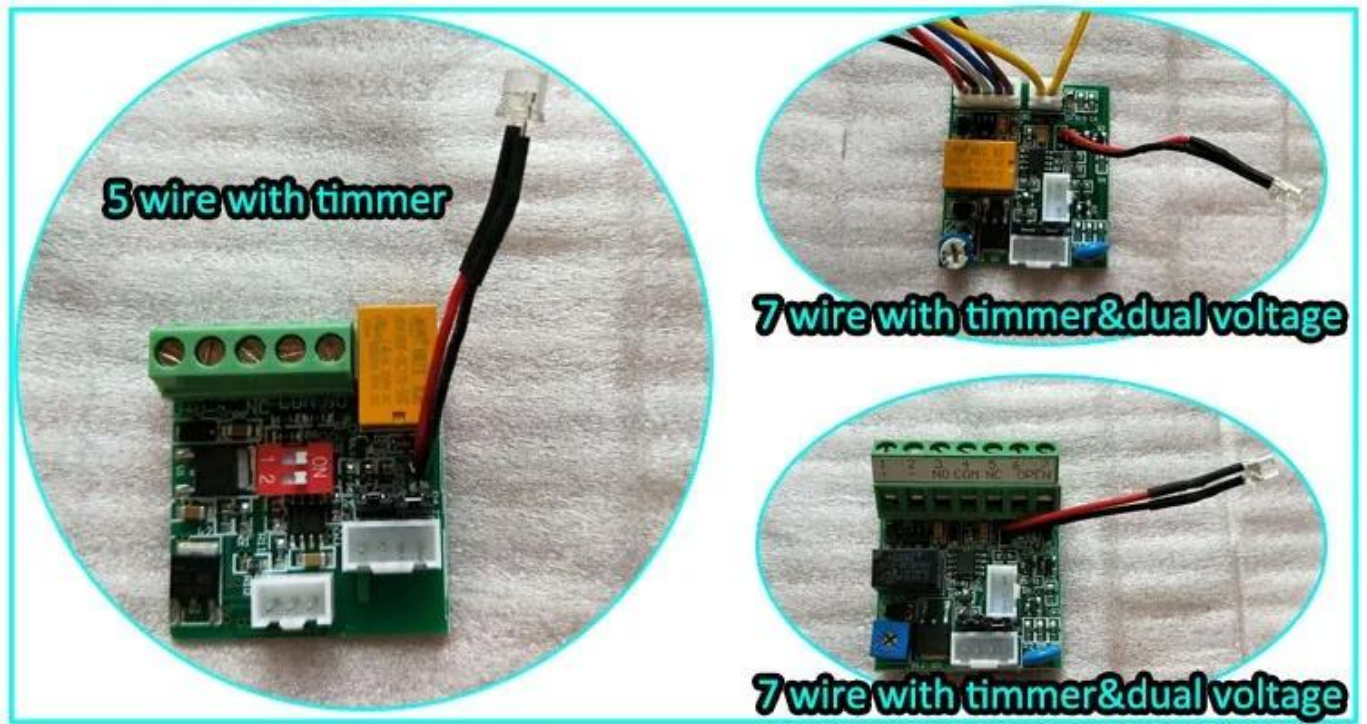

5 wire with timmer

7 wire with timmer&dual voltage

7 wire with timmer&dual voltage


5 wire with timmer

- 5 wire with timmer is a module that can be used for timing applications. It has a green PCB and a yellow timer. The module has 5 pins: 1. GND, 2. VCC, 3. TIMING, 4. TIMING, 5. TIMING. The module is used for timing applications.


5 wire with timmer

STANDARD INSTALLATION STEPS


Professional guidance, Rest assured



1 Fold the plate to 90° .




2 Close the door first, then place the upper side of template on door frame, while adjust the left side next to the door leaf.




3 Mark screw positions of armature plate and magnetic lock on door leaf and door frame respectively.




4 Drill holes based on the marked positions.




5 Make a combination based on the picture.



6 Strike the pin into the armature plate slightly (to avoid movement).




7 Make a combination based on the picture (add washer accordingly). The rubber ring must be added.




8 Place the rubber ring between armature plate and door leaf.




9 Use Allen key to remove the mounting plate from lock body.




10 Fix the mounting plate on the door frame according to the holes drilled earlier.




11 Use Allen key to screw the lock body on the mounting plate.




12 Close the door to test holding force. The angle between armature plate and magnetic lock can be adjusted by adding or reducing washers.




13 After all the appropriate procedures, the holding force can be maximized. Finally, fix the tamper screw.



Hollow Metal Door
Drill a hole
Inside: Diameter is 8mm
Outside: Diameter is 16mm



Wooden Door
Drill a hole
Inside: Diameter is 8mm
Outside: Diameter is 12.7mm



Metal Surface Door
6.8mm for M8-1.25thread
Inside: Drill a hole diameter is 8mm folding the plastic straight pin

Notice:

Thickness of Door Leaf:

350LBS: 44mm

600LBS: 50mm

800LBS: 48mm

1200LBS: 46mm

📦📦📦📦📦📦📦📦📦📦

📦📦📦📦📦📦

📦 📦📦📦 📦📦📦📦 DHL 📦 FEDEX 📦 TNT 📦 UPS 📦 EMS 📦 SEA 📦 AIR Forwarders
📦📦 📦📦📦📦 📦📦📦📦📦📦📦📦📦📦📦📦📦📦

📦📦📦

📦 📦📦📦📦📦 📦📦 📦📦 10 📦 📦📦📦📦📦 📦📦 📦📦📦 1 :📦📦📦📦📦📦 📦📦📦📦📦📦

📦📦📦📦 📦📦 📦📦📦📦 50 .📦📦 24 :📦📦📦📦📦📦📦📦📦📦 📦📦 16 * 30 * 35 :📦📦📦📦📦📦📦📦



You may need



ACM-Y280N

280) 280mm 280mm 280mm 280mm
280mm 280mm 280mm :280mm 280mm (280mm 600 /
280mm 280mm | 280mm 280mm 280mm 280mm

ACM-Y180

(300 / 180) 300mm 180mm 300mm
:300mm 180mm 300mm 2 300mm 180mm
300mm 180mm 300mm 180mm 300mm 180mm
300mm 180mm 300mm.

ACM-Y280[illegible]**ACM-Y280-L**

□□□ L □□□ 350 / □□□ 280 □□□□□□□□ □□□□

ACM-Y180ZL

□□ ZL 300 / □□ 180 □□□□□□ □□□□
□□

ACM-Y280-ZL

□□□ ZL 350 / □□□ 280 □□□□□□□□ □□□□
□□□

سيتم الرد على أي استفسارات في غضون 24 ساعة ، 1
2 ، الصانع والمورد المهني ، مرحبا بكم في زيارة موقعنا على شبكة الإنترنت ومصنعنا
متاح OEM / ODM ، 3
سعر معقول وتنافسية ، مهلة سريعة ، fashion 4 ، جودة عالية ، تصميم
5 ، خدمة ما بعد البيع:
1) ، سيتم فحص جودة جميع المنتجات بدقة في المنزل قبل التعبئة
2) ، جميع المنتجات سوف تكون معبأة بشكل جيد قبل الشحن
3) ، جميع منتجاتنا لها ضمان لمدة 2-3 سنوات إذا لم يكن الضرر ناتجًا عن الإنسان
6 ، تسليم أسرع : حوالي 1 ~ 5 أيام لعينة النظام ، 7 ~ 30 يوما للطلب بالجملة
وبسترن يونيون ، باي بال. ، T / T : 7: الدفع: يمكنك الدفع مقابل الطلب عبر
يمكنك أيضًا اختيار وكيل الشحن الخاص ، By AIR و Forwarder by SEA و EMS و UPS و TNT و FEDEX و DHL ، الشحن: لدينا تعاون قوي مع
بك.

[illegible]