

2
5
L
X
3
5
W
X
4
H
(
)
9
L
x
2
5
W
X
2
H
(
)

D
I
O
V

9
6
8

[illegible]

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100

1. 2. 3. 4. 5. 6. 7. 8.

1. .
 2. .
 3. .
 4. 500000 .
 5. MOV .
 6. .
 7. .
 8. .
- :
 :
 :
 :


OEM / ODM ، صور مفصلة



UW-500U-LED

Feature: Fail Safe
 Face Plate: 185Lx25.7Wx37H(mm)
 Bolt: 16(length)x12.7(diameter)(mm)
 Voltage: DC12V
 Start Current: 960mA

Standby Current: 180mA
 Solid Bolt : polishing housing, 1000Kg Holding Force
 Suitable For: Electric Bolt For Narrow Door
 Signal Output: Door status Output,NO/COM
 Surface Temp: Low Temperature
 Induction Distance: 8mm
 Special Designed: Tested to 500000 operations
 Plate material: Stainless Steel
 Weight: 1.2kg


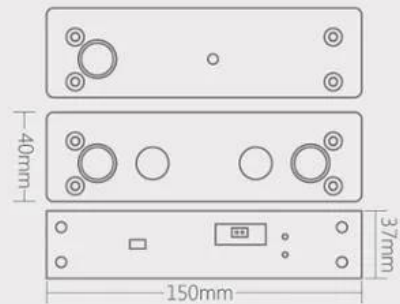


1. 2. 3. 4. 5. 6. 7. 8.




STANDARD INSTALLATION STEPS


Professional guidance, Rest assured



1 Fold the plate to 90° .




2 Close the door first, then place the upper side of template on door frame, while adjust the left side next to the door leaf.




3 Mark screw positions of armature plate and magnetic lock on door leaf and door frame respectively.




4 Drill holes based on the marked positions.




5 Make a combination based on the picture.



6 Strike the pin into the armature plate slightly (to avoid movement).




7 Make a combination based on the picture (add washer accordingly). The rubber ring must be added.



8 Place the rubber ring between armature plate and door leaf.




9 Use Allen key to remove the mounting plate from lock body.




10 Fix the mounting plate on the door frame according to the holes drilled earlier.




11 Use Allen key to screw the lock body on the mounting plate.




12 Close the door to test holding force. The angle between armature plate and magnetic lock can be adjusted by adding or reducing washers.




13 After all the appropriate procedures, the holding force can be maximized. Finally, fix the tamper screw.



Hollow Metal Door
Drill a hole
Inside: Diameter is 8mm
Outside: Diameter is 16mm



Wooden Door
Drill a hole
Inside: Diameter is 8mm
Outside: Diameter is 12.7mm



Metal Surface Door
Inside: Drill a hole diameter is 8mm folding the plastic straight pin

Notice:

Thickness of Door Leaf:

350LBS: 44mm

600LBS: 50mm

800LBS: 48mm

1200LBS: 46mm

□□□□□□ □□□□□□□□

طريقة الشحن

□□ □□□ □□□□□ □□□□□ DHL □ FEDEX □ TNT □ UPS □ EMS □ Forwarder by SEA □ AIR
□□ □□□□□ □□□□□ □□□□ □□□□□□ □□□□□□ □□□□□□.

التعبئة والتغليف

التعبئة والتغليف الترياس قفل: 1 وحدة لكل صندوق ، 20 جهاز كمبيوتر شخصى في الكرتون ،
م ، الوزن الإجمالي: 14 كجم. 50 كرتون لكل طبليعةحجم الورق المقوى : 12 * 29 * 52



□□□ □□□ □□□□□□

00000 3 00 0000000 0000 000 00000000 000000 000 00000 !!!

000000 00 0000000 0 0000000 00 000000 20 00 0000000 000 00000000 00 00000000 000000000 00000000 0000000 0000
!00000 "00000" 000 00000 0 000000 0000000000 0000000 00000 0 00000 !0000000 00 00000000 00000 000 00 00000
0000000000 00 00000000 000000 00000 00 000 000000 00 000000 00000000 00000000 000000 00000 000000 0000.



ACM-Y100S 2 00000

00000000000 000000000 0000
100 0000000000MA / 900 00000MAP
2 0 00000PIN

ACM-Y500A

00000000000 000000000 0000
000000000 000000000 000000 0 000000 0000000
000000000000 00000 0

ACM-Y100S 5PIN

□□□□□□□□ □□□□□□ □□□
□ □□□□□□□ □□□□□□ □□□□ □□□ □□□□□
□□□ □□□□□□ □ □□□□□□□ □□□□□□ □□□□□
5 □ □□□□□PIN

You May Need



ACM-Y280

□□□ 280) □□□□□ □□□ □□□□□□□□ □□□
□□□ 600 /)

ACM-Y100S

مغناطيسية مغناطيسية مع مغناطيسية مغناطيسية
مغناطيسية (NC / NO) مغناطيسية مع مغناطيسية مغناطيسية
مغناطيسية مع مغناطيسية PVC

ACM-Y066

(مغناطيسية مغناطيسية) مغناطيسية مغناطيسية
مغناطيسية 41 × 98 × 130 :مغناطيسية مغناطيسية

حاجة قوس لقفل الباب ديدبولت



ACM-Y700

مغناطيسية مغناطيسية مغناطيسية مغناطيسية مع مغناطيسية
مغناطيسية مغناطيسية مغناطيسية

ACM-Y600

تتميز هذه الوحدة بـ ١٠ منافذ RJ45
تتميز هذه الوحدة بـ ١٠ منافذ RJ45

ACM-Y601

تتميز هذه الوحدة بـ ١٠ منافذ RJ45
تتميز هذه الوحدة بـ ١٠ منافذ RJ45

مجموعة كاملة من التحكم في الوصول إلى باب الحل



ACM-WEG02

تتميز هذه الوحدة بـ ١٠ منافذ RJ45
تتميز هذه الوحدة بـ ١٠ منافذ RJ45
(RS232 أو RS485 أو TCP / IPC
Communication)

ACM-K2A

□□□□□ □□□□ □□ Realese ExitButton □

K2A: 115 * 40mm □ K2B: 86 * 86mm

ACM-Y806-3A

12 □□□□□□□□□□ □□□□□□ □□□□□□V / 3A



ACM-Y280

□□□ 280) □□□□□ □□□ □□□□□□□□ □□□
□□□ 600 /)

ACM-26X

125 □□□□Khz wiegand 26/34 □ :□□□□□
115mm × 75.5mm × 16.8mm

ACM-EMI-S

0000 0000 125 00000 00000 EM

0000 3 00 000000 0000 000 0000000 000000 000 0000 !!!

000000 00 0000000 0 0000000 00 000000 20 00 0000000 000 0000000 00 0000000 00000000 00000000 0000000 0000
!00000 "00000" 0000 00000 0 000000 0000000000 0000000 00000 0 00000 !0000000 00 00000000 00000 0000 00 00000
0000000000 00 00000000 000000 00000 00 0000 0000000 00 000000 00000000 0000000 000000 0000 000000 0000.

00000000

1 0 0000 24 0000 00 00000000000 00 000 00000 0000

00000000 0000000000 0000 0000 00000000 000000 00 0000 000000 0 00000000 000000000 00000000 0 2

3 0 OEM / ODM 00000

000000 0 000000 00000 0 4 fashin 0 000000 00000 0 0000000000 000000 0000

:000000 0000 00 00000 0 5

00000000 0000 0000000000 00000 00 00000 00000000 0000 00000 0 (1

000000 0000 0000 00000 000000 00000 0000 00000000000 00000 0 (2

00000000 00 0000000 000000 0000 00 0000 000000 3-2 00000 000000 0000000000 00000 000000 0 (3

00000000 000000 00000 30 ~ 7 0 0000000 000000 00000 5 ~ 1 000000 :00000 000000 0 6

0000 0000000 0000000 0000000 :000000 0 7: T / T 0 0000 0000000000 00000 0 0000 0000 0 00000000 00000000

00 0000 0000000 000000 :000000 0 8 DHL 0 FEDEX 0 TNT 0 UPS 0 EMS 0 Forwarder by SEA 0 AIR 0 000000

00 000000 0000000 00000 00000000 0000000.

ضمان الجودة

- 00000 0 000000000 00 00000000 0000000 0000 00 0000 00000000 00000 0000000 00000 ACM Goldbridge 00000 00000000

.0000000 0000 00000000000 0000000

0000 0 0000 00 0000000 0000 - ACM Goldbridge .0000000000 00000 00 00000000 0000000 000000 0000

0000000 00000000 00000 00000 00000 0 000000000000 00 00000 -.

00000000

00000 ACM Shenzhen Goldbridge 0000000000

00000000 00000000 0000000 00 0000000000 0000000000 00 0000000 00000000000 RFID 0000000000 00000000 00000000 00 0000000000
0000000000 00 00000 0000000 000000.00000000 000000 20 0000 00000000 0000 00 0000 0000 0 000000 00 00000000000000
00000000 00 00000000 00000000 00000000 0000 00000000000 RFID. 0000000 :00 0000000 000000 00000000 RFID 0 000000
000000000 RFID 0 00000 00000 RFID 0 000000 RFID 000000 RFID 00000 0 000000 UHF 000000 0 0000000 00000
00000000 00 00000000 00000 00000 000000 0000 .000000000000000000 0000000000.

