

الوصول إلى زر التحكم في LED الأشعة تحت الحمراء التحكم في الوصول إلى التبديل
NO / NC / COM الوصول مع




[illegible]

PRODUCT CHARACTERISTICS

Contactless Infrared Sensor





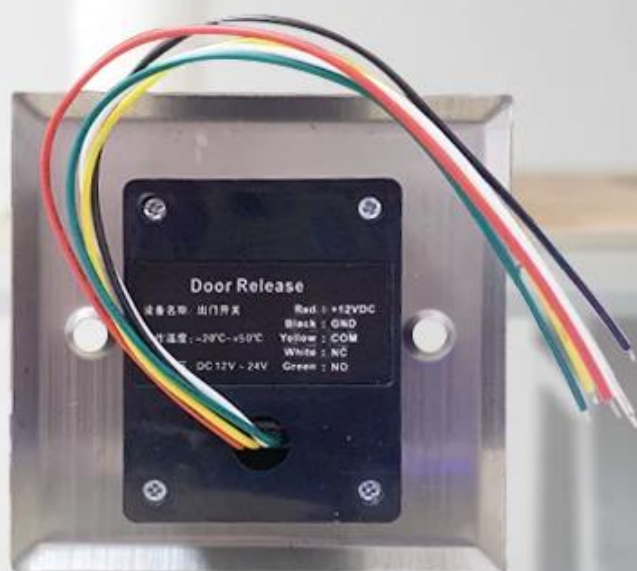




Infrared induction switch



Product Dimensions

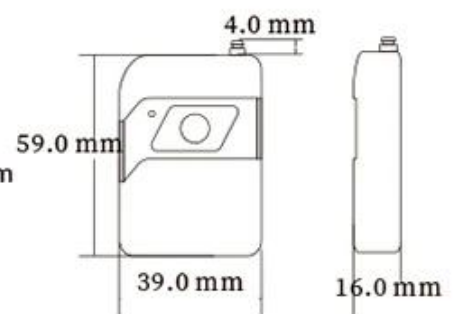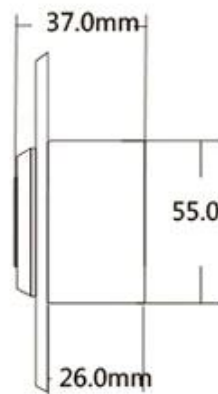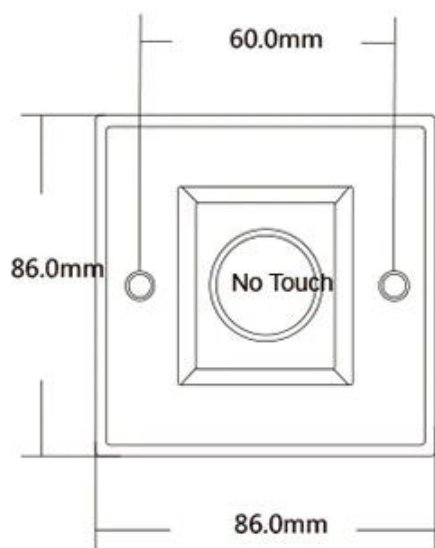

طلب





□□□□□□

K2B: 86 * 86mm

□□□□□□□ □□□□□□□ □□□□□ □□□□ □□

□□□□□□□

K9A: 115 * 40mm

□□□□□□□□ □□□□□□□□) □□□□□□□ □□□□□ □□

□□ □□□□□□ / NC) K5B: 86 * 86mm



.ᐃᐃᐃᐃ ᐃᐃᐃ ᐃᐃᐃᐃ ᐃᐃ ᐃᐃᐃᐃᐃᐃᐃ ᐃᐃᐃᐃᐃᐃ ᐃᐃᐃᐃ ᐃᐃᐃᐃ ᐃᐃᐃᐃᐃ ᐃᐃᐃᐃᐃ ᐃᐃᐃ ᐃᐃᐃᐃᐃ ᐃᐃᐃ ᐃᐃᐃᐃ

ᐃᐃᐃᐃᐃᐃᐃ ᐃᐃᐃᐃᐃ ᐃᐃ ᐃᐃᐃᐃ .2 :

a: t / t paypal .ᐃᐃᐃᐃᐃᐃᐃ ᐃᐃᐃᐃᐃᐃᐃ

ᐃᐃ ᐃᐃᐃᐃᐃᐃᐃ ᐃᐃ ᐃᐃᐃᐃᐃᐃᐃ ᐃᐃ ᐃᐃᐃᐃᐃᐃ ᐃᐃᐃᐃ ᐃᐃ ᐃᐃᐃᐃᐃᐃᐃᐃ ᐃᐃᐃᐃᐃᐃᐃ ᐃᐃᐃᐃ (DHL FedEx TNT UPS ᐃᐃᐃ ᐃᐃᐃ (ᐃᐃᐃᐃ

ᐃᐃᐃᐃᐃᐃᐃ ᐃᐃ ᐃᐃᐃᐃᐃᐃᐃ ᐃᐃᐃᐃ ᐃᐃᐃ ᐃᐃᐃᐃᐃᐃᐃ ᐃᐃᐃᐃᐃᐃ ᐃᐃᐃ .3 :

a: .ᐃᐃᐃᐃᐃ ᐃᐃ ᐃᐃᐃᐃᐃᐃᐃᐃᐃ ᐃᐃᐃᐃᐃᐃ ᐃᐃᐃᐃᐃᐃᐃ ᐃᐃᐃᐃᐃᐃ ᐃᐃᐃᐃ ᐃᐃ ᐃᐃᐃᐃ ᐃᐃ ᐃᐃᐃᐃᐃᐃᐃ

ᐃᐃᐃᐃᐃᐃᐃᐃ ᐃᐃᐃ ᐃᐃᐃᐃᐃᐃᐃ ᐃᐃᐃᐃᐃ ᐃᐃ ᐃᐃᐃᐃ ᐃᐃᐃ .4 :

ᐃᐃᐃᐃ 100000 ᐃᐃᐃᐃᐃᐃ ᐃᐃᐃᐃ 15-7 ᐃ ᐃᐃᐃᐃ 5000 ᐃᐃᐃᐃ ᐃᐃᐃᐃ 7-3 ᐃᐃᐃᐃ .ᐃᐃᐃᐃᐃᐃᐃ ᐃᐃᐃ ᐃᐃᐃᐃᐃᐃ ᐃᐃᐃ :

ᐃᐃᐃᐃᐃᐃᐃᐃ ᐃᐃᐃᐃᐃᐃ ᐃᐃᐃᐃ ᐃᐃ .5 :

ᐃᐃᐃᐃᐃᐃᐃ .ᐃᐃᐃᐃᐃᐃᐃᐃᐃ ᐃᐃᐃᐃᐃᐃᐃ ᐃᐃᐃᐃᐃᐃ ᐃᐃᐃ ᐃᐃ ᐃᐃᐃ ᐃᐃᐃᐃᐃᐃᐃᐃ ᐃᐃᐃᐃᐃᐃᐃ ᐃᐃᐃᐃ ᐃᐃᐃᐃᐃ ᐃᐃᐃ : OEM ᐃᐃᐃᐃ ᐃᐃ ᐃᐃᐃᐃᐃᐃᐃ

ᐃᐃᐃᐃᐃ ᐃᐃ ᐃᐃᐃᐃᐃᐃᐃ ᐃᐃᐃᐃ ᐃᐃᐃ ᐃᐃ .6 :

ᐃᐃᐃᐃᐃᐃᐃᐃ ᐃᐃᐃᐃᐃᐃᐃᐃ ᐃᐃᐃᐃᐃ ᐃᐃ ᐃᐃᐃᐃᐃ ᐃᐃᐃ RFID / ᐃᐃᐃᐃᐃᐃᐃ NFC / RFID Keybods / ᐃᐃᐃᐃᐃ RFID

ᐃᐃᐃᐃᐃᐃ RFID ᐃᐃᐃᐃ 20 ᐃᐃ ᐃᐃᐃᐃᐃᐃᐃ ᐃᐃᐃᐃᐃ ᐃᐃ ᐃᐃᐃᐃᐃᐃᐃ ᐃᐃᐃᐃᐃᐃᐃᐃ.