




13.56MHz RFID 13.56
wiegand em rfid 13.56 13.56MHz RFID 13.56
 13.56MHz RFID 13.56

13.56MHz RFID 13.56 : 13.56MHz
 wiegand26 13.56MHz RFID 13.56MHz
 13.56MHz RFID 13.56MHz RFID 13.56MHz
 13.56MHz RFID 13.56MHz

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10
- 11
- 12
- 13
- 14
- 15
- 16
- 17
- 18
- 19
- 20
- 21
- 22
- 23
- 24
- 25
- 26
- 27
- 28
- 29
- 30
- 31
- 32
- 33
- 34
- 35
- 36
- 37
- 38
- 39
- 40
- 41
- 42
- 43
- 44
- 45
- 46
- 47
- 48
- 49
- 50



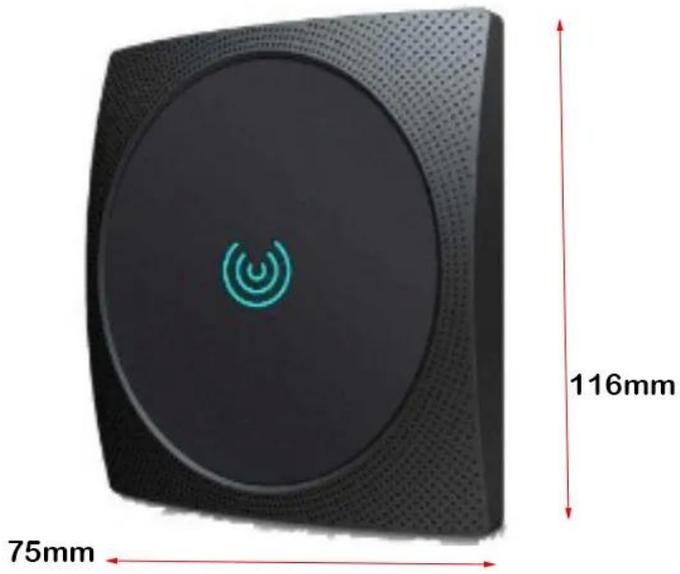



RFID ACM-EMI-S

125 KHz EM
54 * 86 mm

RFID ACM-MF1

MF1
54 * 86 mm

RFID ACM-ABS003

125 KHz EM / 13.56 MHz
RFID Tag Specifications

RFID Tag Specifications

- This tag is designed for use with ACM Goldbridge RFID systems. It is not compatible with other RFID systems. For more information, please contact ACM Goldbridge. This tag is not for sale in the United States and Canada.

RFID Tag Specifications

- 1. This tag is 24 mm thick and is designed for use with ACM Goldbridge RFID systems.
- 2. This tag is not compatible with other RFID systems.
- 3. OEM / ODM tags
- 4. fashin tags are designed for use with ACM Goldbridge RFID systems.
- 5. This tag is 5 mm thick.
- 6. This tag is 1 mm thick.
- 7. This tag is 2-3 mm thick.
- 8. This tag is 30-70 mm thick.
- 9. This tag is 5-1 mm thick.
- 10. This tag is 7: T / T mm thick.
- 11. This tag is 8 DHL, FEDEX, TNT, UPS, EMS, Forwarder by SEA, By AIR mm thick.

RFID Tag Specifications

1. This tag is 1 mm thick. It is not compatible with other RFID systems. For more information, please contact ACM Goldbridge.

2. This tag is 2 mm thick. It is not compatible with other RFID systems. For more information, please contact ACM Goldbridge.

3. This tag is 3 mm thick. It is not compatible with other RFID systems. For more information, please contact ACM Goldbridge.

