

Mechanical Life: 1000000 tested




Operating temp: 10~+55°C(14-131°F)

Panel Material: Fireproof Material

Current Rating: 3A,36VDC Max





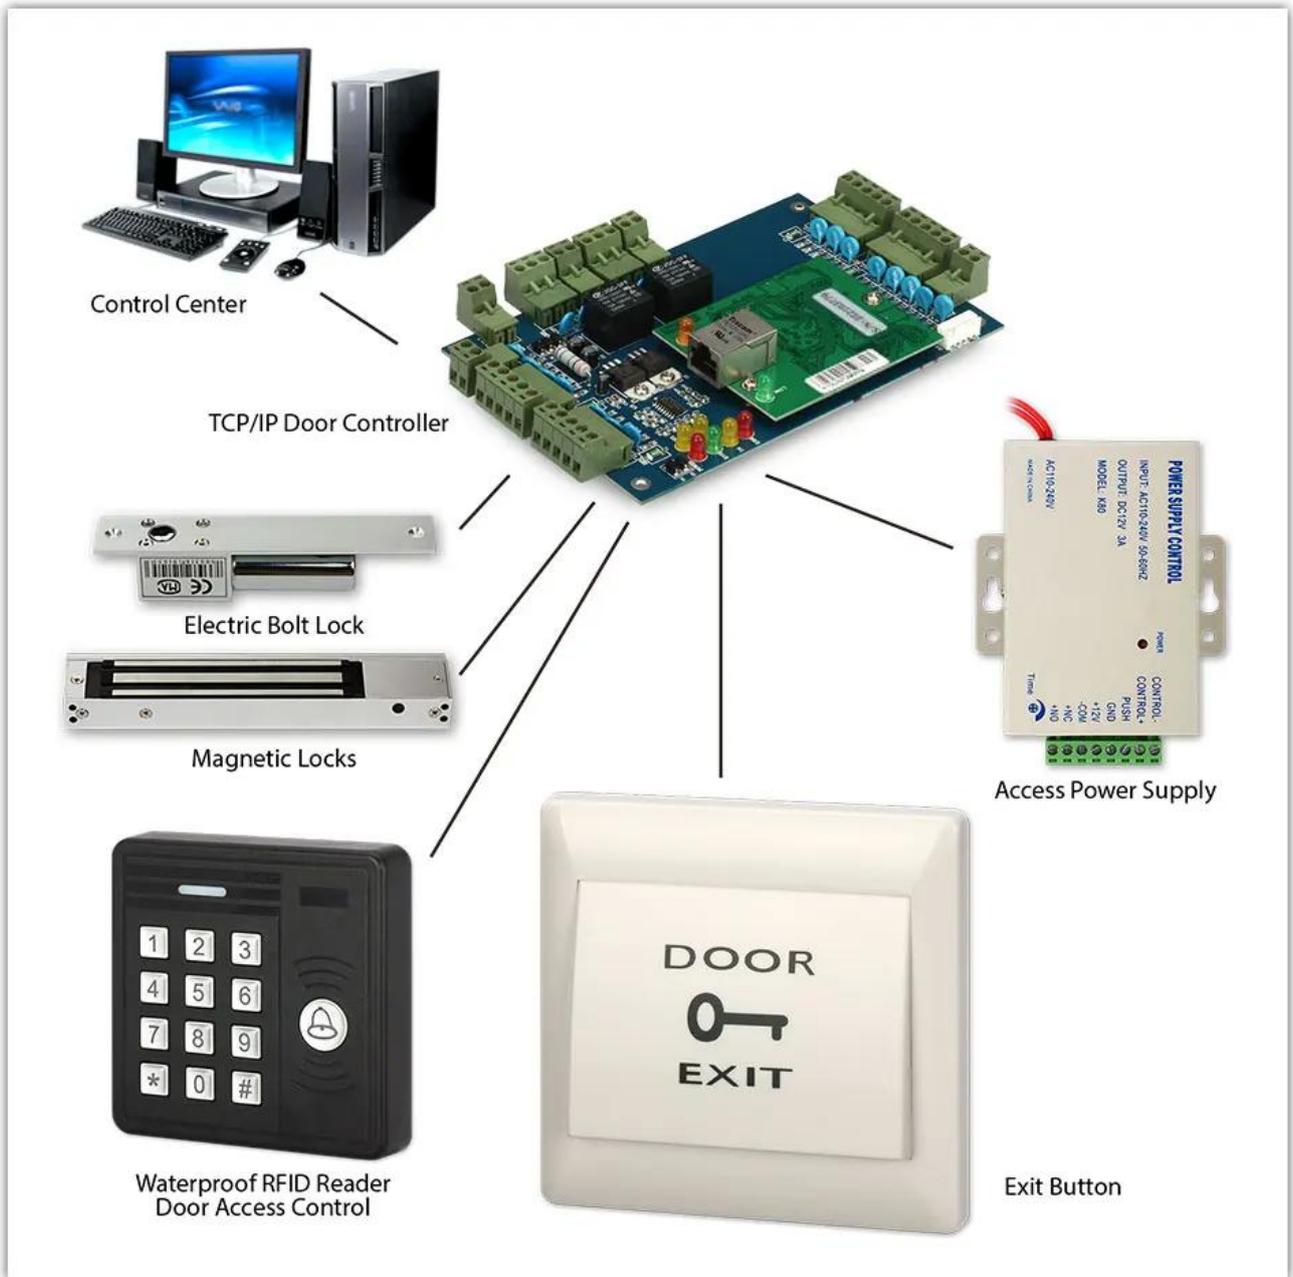

كيت التحكم في الوصول





□□ □□□□□□ □□□□□□ □□□ □□□□ □□  
□□□□□□

K2B: 86 \* 86mm

□□□□□□ □□□□□□ □□□□□ □□□□ □□  
□□□□□□

K9A: 115 \* 40mm

□□□□□□ □□□□□□) □□□□□□ □□□□□ □□  
□□ □□□□□□ / NC) K5B: 86 \* 86mm





RFID / NFC / RFID Keybods / RFID  
RFID 20