



1. 2. 3. 4. 5.

1. .
2. .
3. .
4. .
5. .



A
C
:
2
2
V
□
□
□
□
V
□
2
□
V
□
1
2
V

[illegible]

[illegible]

[illegible]

3 5 x 7 4 x 8 5 6 7 8 9
(W x H x L)



•

□□□□□□ □□□□□□ □□□□□□ □□□□□□
 □□□□□□ □□□□□□ □□□□□□ □□□□□□







■ Install Detector

The loop detectors must only be placed in dry rooms or control cabinets that are protected against all types of moisture and wetness. A distance of at least 10 mm from other devices must be maintained on each side. The ambient temperature must not exceed 65° C. The installation of the induction loop is described in other operating instructions.

■ Operation and Indication

When the power is applied, the red Power LED will glow and the detector is tuning, the green Check LED blink about 3 seconds. The green LED will also glow whenever a vehicle is detected passing over the inductive loop. If a loop fault exists the green LED will come on and flash indicating a fault.

■ Wiring Diagram

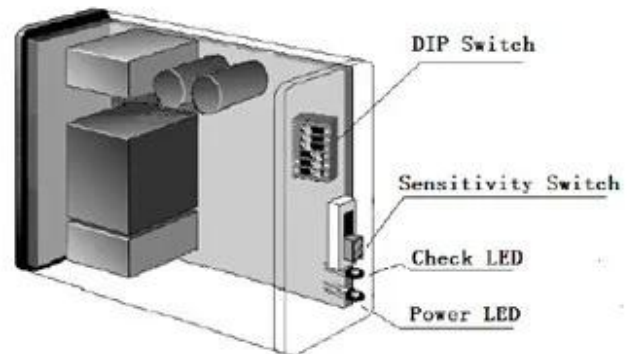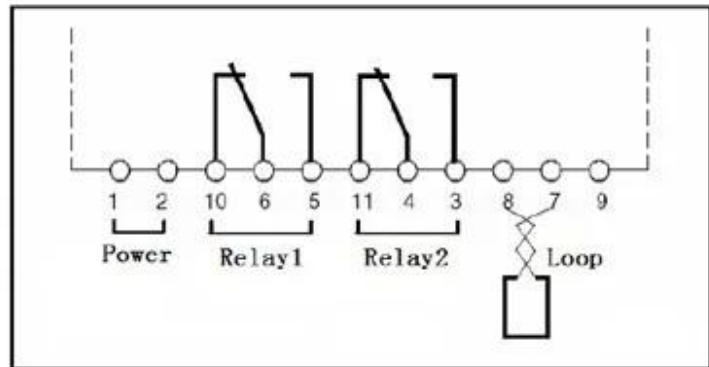

■ 产品规格

产品规格 产品规格 产品规格 产品规格 uhf 产品规格 ACM812A 产品规格 产品规格 产品规格 ACM802A 产品规格 ACM818A 产品规格 ACM801A. 产品规格 产品规格 产品规格 .产品规格 产品规格 产品规格 产品规格 产品规格 ACM801A 产品规格 产品规格 产品规格 产品规格 产品规格 .(产品规格 产品规格 产品规格 产品规格 产品规格 200) 产品规格 产品规格 产品规格 产品规格 产品规格.





ACM812A
2-5m 送信機 受信機 UHF 送信機
Wiegand 26 output RS232 / 485

ACM818A
10-20m 送信機 受信機 UHF 送信機
Wiegand 26 output RS232 / 485

ACM802A
8-10m 送信機 受信機 UHF 送信機
Wiegand 26 output RS232 / 485



