



RFID 500000

1. 500000

2. 500000

3. 500000

4. 500000

500000

8
6
L
x
8
8
W
8
8
8
(
)
)

□□□□□□ □□□□□□ □□ □□□□□□ □□□□□□ □□:

- □□□□□ □□□) □□□□□□□ □□□ / □□□ □□□□ □□□□□□□ □□□□□□□
- □□□□□□□ □□□ □□□□□□□ / □□□□□□ □□□□□□□

□□□□ □□□□□ IP-55 / □□□□□□ □□□□□□ □□□□□□ □□□ SUS 304
(□□□□□ □□□□□□□) □□□□□□□□□□□ □□□□

□□□□□□□□□ □□□□□□□□ □□□□□□□□ □□ □□□□ ..

□□□ 10 ~ 0.1 :□□□□□□□□□□□ □□□□□

□□□□□□ □□□□□□□ / □□□□□ / □□□□□ / □□□□□□□ :□□□□□□□□

3) □□□□□□□□ □□□□□□ □□□□□□□ □□□□□ □□□□□A / AC120V □ DC30V)

- □□□□□□□□ □□□□□□□ □□□□□□□ / □□□□□ □□□□□□□ / □□□□□□□ □□□□□

□□□□□□□ LED :□□□□□□□□□□ □□ □□□□□□□□ □□ □□□□□□□□□ □□□□□□□□

□□□□□ □□□□□□□□ :□□□□□□□□□ □□□□□□□□ (1) LED □□□□□

□□□ 10 □□ □□□□□□□□□ □□ □□□□□□□□ □□□□□ □□□□□□□□ (2): RED LED ON




**Blue LED Indicator:
Power ON (Standby)**

**Red LED Indicator:
Power ON (Triggered)**



+12V	GND	NO	COM	NC
Red	Black	Yellow	White	Orange

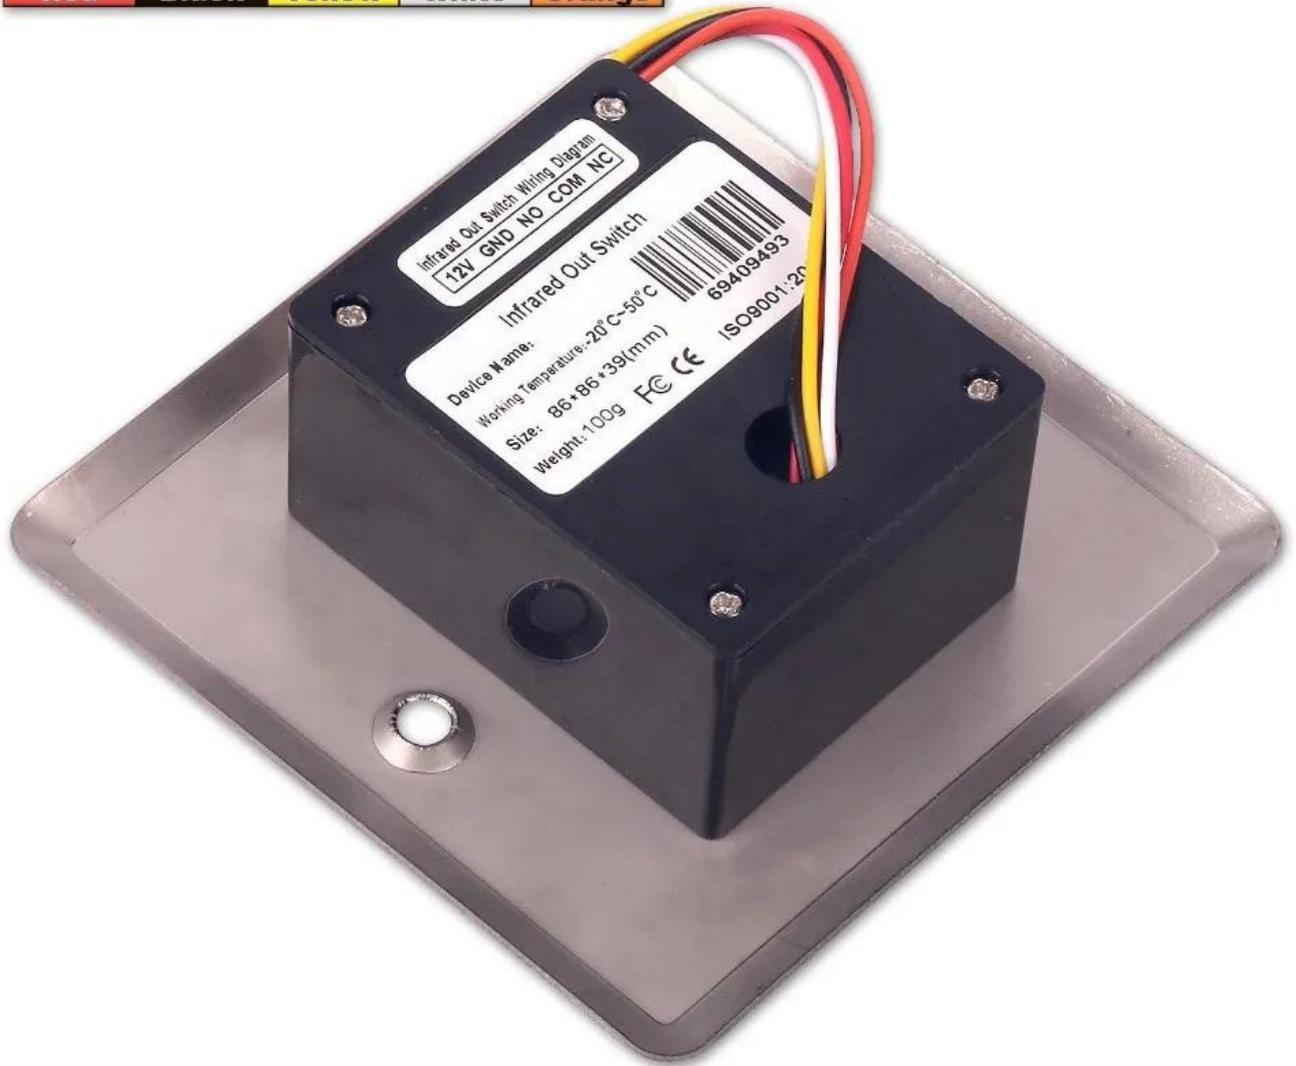

Installation



Sensing Range



LED Indicator



A: Black / PC Lens

B: Round Shape LED Indicator

Power OFF




White
(Round Circle)

Power On / Standby




Blue LED Indicator ON
(Round Circle)

Power On / Beam Broken

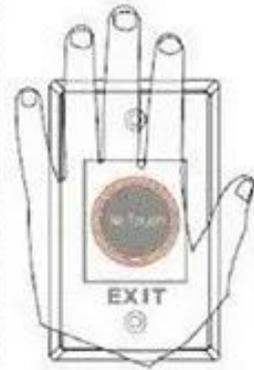

Red LED Indicator ON
(Round Circle)

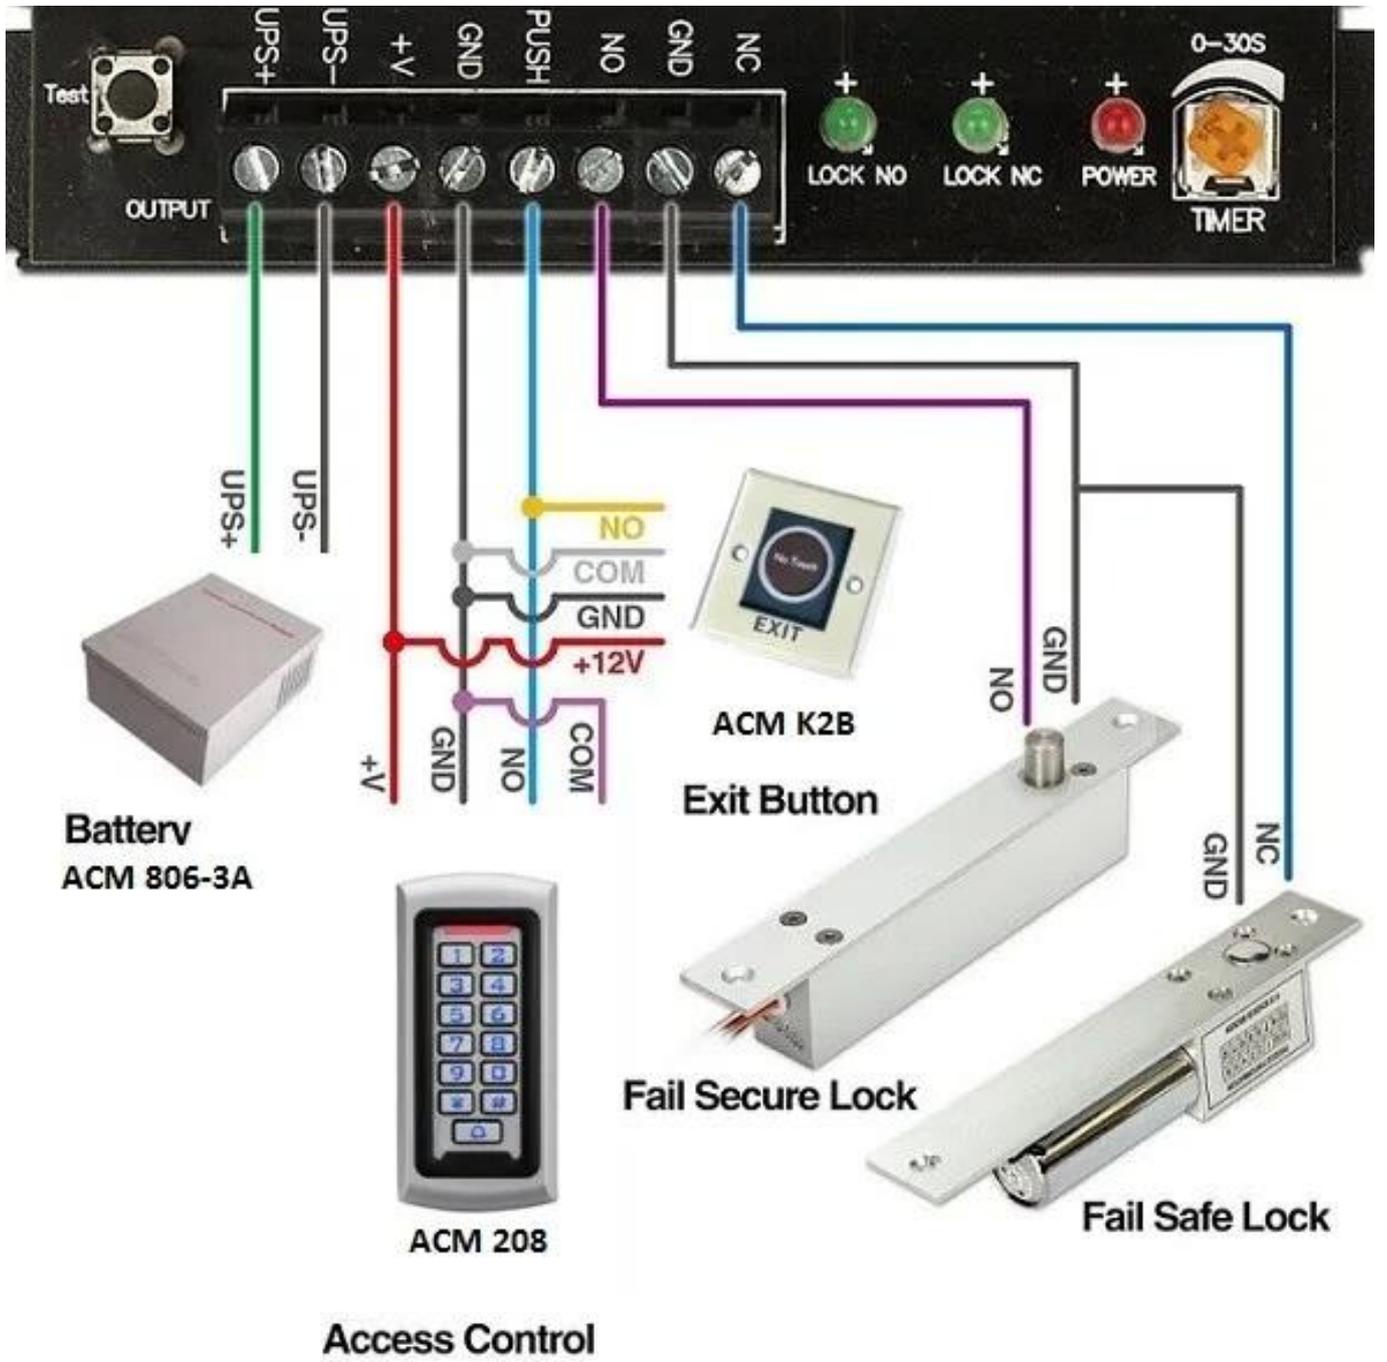

□□□□ : □□□□□□ □□□
 □□□ 0.3 : □□□□□□ □□□
 □□ 8 × □□ 10 × □□ 10 : □□□□□□ □□□





Realese

K2B: 86 * 86

Realese

K9A: 115 * 40

)

NO / NC) K5B: 86 * 86



