



00000000 00000000 **L** 000000000000 000000 0000 **500** 0 0000
 0000000000 0000

1. .
2. ACM-180ZL / ACM-280ZL / ACM-350ZL / ACM-500ZL / ACM-750ZL .
.3
.
.

L
1
7
x
4
x
2
9
(
0
0
)
2
5
1
3
x
3
8
x
3
8
(
0
0
)
(
0
1
8
2
L
L
)
L
5
2
5
x
4
7
x
2
8
(
0
0
)
2
5
8
x
5
5
(
0
0
)
(
0
2
8
L
L
)
L
5
2
8
5
5
x
5
4
x
3
1
(
0
0
)
)
2
8
8
8
9
x
5
7
x
5
(
0
0
)
(
0
3
2
2
L
L
)
L
5
6
5
x
7
x
4
5
(
0
0
)
)
2
1
8
5
x
7
x
6
1
(
0
0
)
(
0
8
2
L
)
L
5
8
x
8
x
5
1
(
0
0
)
)
2
5
9
x
7
x
6
1
(
0
0
)
(
0
7
5
2
L
)
)


[illegible]



Advantage ☐☐☐☐☐

00 000 Z & amp 0000000000 00000 000 00000000 280 / 00000000 180 0 000 0
 000000 0000 0 0000000 000000000000
 000000 0000 0000 0000 00000000 0 000 000000
 00000000000 0000 00000000 000 000
 0000000 00000000 0000 0000

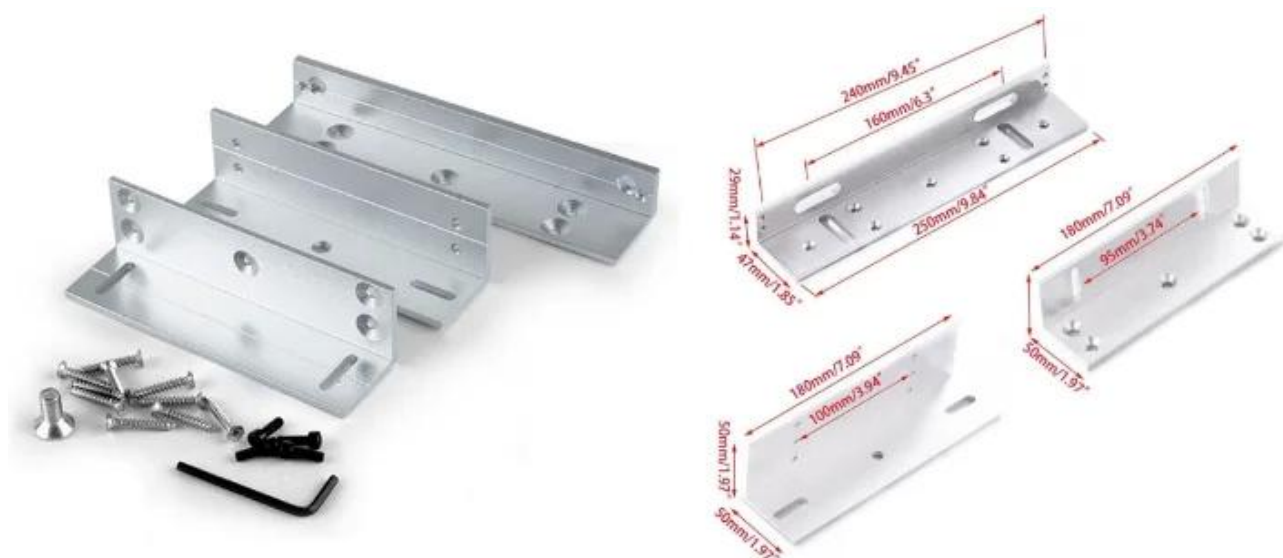

[illegible]

[illegible]

If it is glass door, need to use the U bracket.
(suitable for 10-15mm glass door)



If doorframe is too thick, need to match the amateur plate case.



A detailed view of the door handle and lock assembly. The handle is a horizontal metal bar with a textured grip. The lock mechanism is a small, rectangular metal component mounted on the door frame, featuring a keyhole and a small indicator light.

UL bracket installation

□ □ □ □ □ □ □ □ □ □ □ □ □ □ □ □ □ □ □ □

.00 00000 00000 0000 000000 0000 00000

□□□□□□ □□ L 30 □ □□□□ □□ □□□ 1 : □□□□□□ □□□□□□ □□ pcs □□□□□ □ □



You may need

□□□□□□□□ □□□□ □□ □□ □□□□ □□□□



ACM-Y500L

□□□□ L □□□ 500 □□□□□□□□ □□□□

ACM-Y500U

□□□ U □□□ 500 □□□□□□□□ □□□□

ACM-Y500ZL

□□□ ZL □□□ 500 □□□□□□□□□□ □□□□



ACM-Y280N

(길이 600 / 폭 280) 모델은 표준형으로, 두께 28mm의 도어에 설치 가능하며, 두께 30mm의 도어에 설치할 때는 2mm의 도어 두께를 보충하여 설치할 수 있습니다. | 도어 두께 30mm 이상은 별도 문의

ACM-Y180

모델 (길이 300 / 폭 180)은 표준형으로, 두께 28mm의 도어에 설치 가능하며, 두께 30mm의 도어에 설치할 때는 2mm의 도어 두께를 보충하여 설치할 수 있습니다. | 도어 두께 30mm 이상은 별도 문의

ACM-Y280

280 mm 鋼板厚さ 2mm (穴径 600) 鋼板厚さ 2mm
穴径 600 mm : 鋼板厚さ 2mm 鋼板厚さ 2mm
鋼板厚さ 2mm 鋼板厚さ 2mm 鋼板厚さ 2mm 鋼板厚さ 2mm.



ACM-Y280-L

鋼板 L 鋼板 350 / 鋼板 280 鋼板厚さ 2mm

ACM-Y180ZL

鋼板 ZL / 鋼板 180 鋼板厚さ 2mm
鋼板 300

