



በግልጽ የሚታወቅ የሚገኝ የሚገኝ የሚገኝ የሚገኝ የሚገኝ የሚገኝ
የሚገኝ የሚገኝ የሚገኝ የሚገኝ የሚገኝ የሚገኝ የሚገኝ
የሚገኝ **U** የሚገኝ

Y-500U የሚገኝ ሲሆን .የሚገኝ ሲሆን የሚገኝ የሚገኝ የሚገኝ
የሚገኝ የሚገኝ የሚገኝ የሚገኝ የሚገኝ የሚገኝ የሚገኝ
የሚገኝ የሚገኝ የሚገኝ ሲሆን .የሚገኝ የሚገኝ የሚገኝ
የሚገኝ የሚገኝ የሚገኝ የሚገኝ የሚገኝ የሚገኝ የሚገኝ
የሚገኝ የሚገኝ የሚገኝ .የሚገኝ የሚገኝ የሚገኝ.



[illegible]

[illegible]

[illegible]

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100
---	---	---	---	---	---	---	---	---	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	-----

7220

[illegible]

1. .
 2. .
 3. .
 4. 500000 .
 5. MOV .
 6. .
 7. .
 8. .
- :
:
:
:
:


المتاحة OEM/ODM ، صور مفصلة



UW-500U-LED

Feature: Fail Safe
Face Plate: 185Lx25.7Wx37H(mm)
Bolt: 16(length)x12.7(diameter)(mm)
Voltage: DC12V
Start Current: 960mA

Standby Current: 180mA
Solid Bolt : polishing housing, 1000Kg Holding Force
Suitable For: Electric Bolt For Narrow Door
Signal Output: Door status Output,NO/COM
Surface Temp: Low Temperature
Induction Distance: 8mm
Special Designed: Tested to 500000 operations
Plate material: Stainless Steel
Weight: 1.2kg


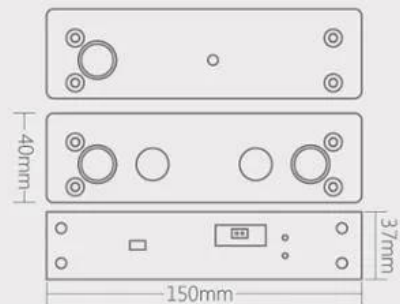


معلومات إضافية




STANDARD INSTALLATION STEPS


Professional guidance, Rest assured



1 Fold the plate to 90° .




2 Close the door first, then place the upper side of template on door frame, while adjust the left side next to the door leaf.




3 Mark screw positions of armature plate and magnetic lock on door leaf and door frame respectively.




4 Drill holes based on the marked positions.




5 Make a combination based on the picture.



6 Strike the pin into the armature plate slightly (to avoid movement).




7 Make a combination based on the picture (add washer accordingly). The rubber ring must be added.



8 Place the rubber ring between armature plate and door leaf.




9 Use Allen key to remove the mounting plate from lock body.




10 Fix the mounting plate on the door frame according to the holes drilled earlier.




11 Use Allen key to screw the lock body on the mounting plate.




12 Close the door to test holding force. The angle between armature plate and magnetic lock can be adjusted by adding or reducing washers.




13 After all the appropriate procedures, the holding force can be maximized. Finally, fix the tamper screw.



Hollow Metal Door
Drill a hole
Inside: Diameter is 8mm
Outside: Diameter is 16mm



Wooden Door
Drill a hole
Inside: Diameter is 8mm
Outside: Diameter is 12.7mm



Metal Surface Door
6.8mm for M8-1.25thread
Inside: Drill a hole diameter is 8mm folding the plastic straight pin

Notice:

Thickness of Door Leaf:

350LBS: 44mm

600LBS: 50mm

800LBS: 48mm

1200LBS: 46mm

المنتجات الكهربائية

طريقة الشحن

يمكن شحن المنتجات الكهربائية DHL، FEDEX، TNT، UPS، EMS، أو عن طريق البريد الجوي أو البحري. يرجى اختيار الطريقة المناسبة.

التعبئة والتغليف

تعبئة قفل الترياس: وحدة واحدة لكل صندوق، 20 قطعة لكل كرتون،
م، الوزن الإجمالي: 14 كجم. 50 كرتون لكل منصة نقالة حجم الكرتون: 12*29*52



المنتجات الكهربائية

ACM-Y100S 5PIN

電磁ロック 5PIN
電磁ロック 5PIN 5PIN 5PIN
5 PIN 5PIN 5PIN 5PIN 5PIN

You May Need



電磁ロック-Y280

280) 電磁ロック 電磁ロック 電磁ロック 電磁
電磁 600/電磁)

ACM-Y100S

اللوحة الإلكترونية للتحكم في قوس الباب الإلكتروني
اللوحة (NC/NO) للتحكم في قوس الباب الإلكتروني
اللوحة الإلكترونية PVC

لوحة التحكم -Y066

(اللوحة الإلكترونية) للتحكم في قوس الباب الإلكتروني
130 :اللوحة الإلكترونية x98x41mm للتحكم في

الحاجة إلى قوس لقفل الباب ديدبولت



لوحة التحكم -Y700

اللوحة الإلكترونية للتحكم في قوس الباب الإلكتروني
اللوحة الإلكترونية للتحكم في قوس الباب الإلكتروني

لوحة التحكم -Y600

لوحة التحكم للباب الكهربائي
لوحة التحكم للباب الكهربائي

لوحة التحكم -Y601

لوحة التحكم للباب الكهربائي

مجموعة كاملة من الحلول للتحكم في الوصول إلى الباب



لوحة التحكم -WEG02

لوحة التحكم للباب الكهربائي
(RS232 أو RS485 أو TCP/IP Communication)

□□ □□ □□-K2A

□□□ □□□□ □□□□□□ □□□□□□ □□□
K2A: 115*40 □□□ K2B: 86*86 □□

□□ □□ □□-Y806-3A

□□□□□ 3/□□□□ 12 □□□□□□□ □□□□ □□□□



□□ □□ □□-Y280

280) □□□□□ □□□ □□□□ □□□□□□□ □□□
□□□ 600/□□□)

□□□**26**-□□ □□ □□□

125 □□□□□ 26/34 □□□□□□ □□□□ □□□□
□□ 16.8 × □□ 75.5 × □□ 115 :□□□□□□

EM-I-S

EM 125

3

20
 "
 !
 .

24
 2
 3
 4
 5
 (1
 (2
 (3
 30 ~ 7
 5 ~ 1
 :
 7: T/T Western Union Paypal Ali
 8 DHL FEDEX TNT UPS EMS
 .
 ضمان الجودة
 - ACM Goldbridge
 .
 - ACM Goldbridge .
 -.

ACM

RFID
 20
 RFID
 RFID
 RFID
 UHF

