

- 2 [] [][][] [][] [][] [][] ISO-18000B [] EPC.
- 4 🛮 SDK 👊 🖂 🖂 🖂

 $^{\circ}$

- 00000 0000 0000 00000 000000 0000 .4 W26 0 W34 0 .000000 0000 00





Interface:


• Standard interface have RS232,RS485 and Wiegand 26




WIRING GIAGRAM										
PWR +12V	GND	232 TXD	232 RXD	GND	WG1 DO	WG1 D1	WG2 DO	WG2 D1	TRIG	TRIO
RED	BLACK	WHITE	PURPLE	BLACK	YELLOW	GREEN	ORANGE	BROWN	BLUE	BLAC




00000 0000 00000 RFID UHF

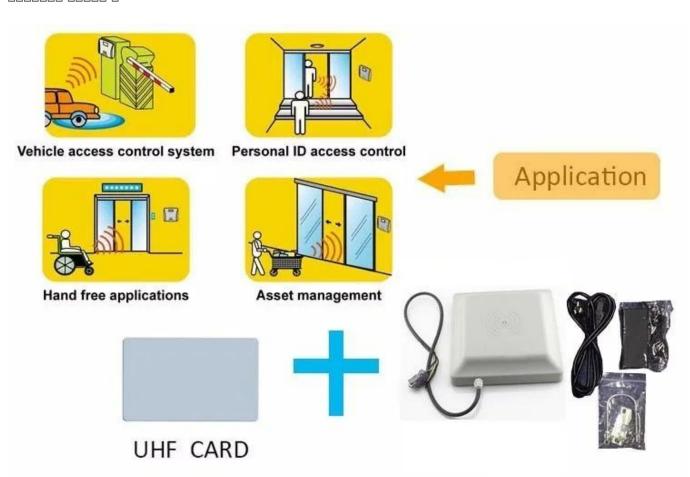

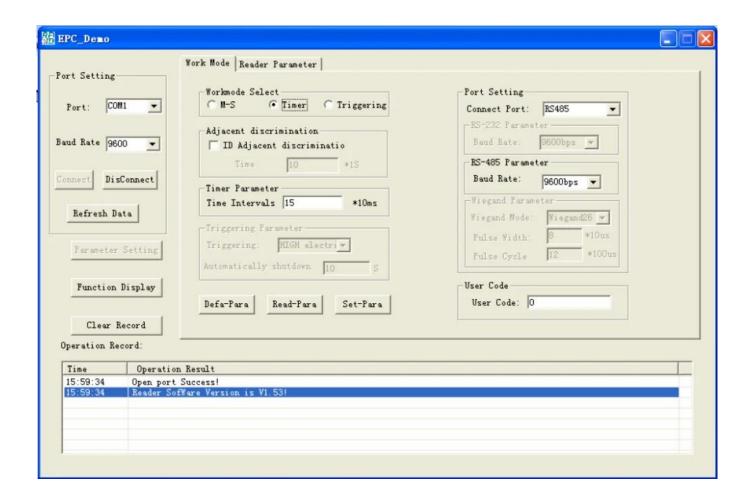









Our Standard Packing

Single Demension: 320*320*60MM

Single Carton for each reader

6 pcs each lot with foam and yellow sticky tape fully wrap .















NONDON NONDO NO DE ANTONO DE ANTONO DE LA CONTRETA DEL CONTRETA DEL CONTRETA DE LA CONTRETA DEL CONTRETA DEL CONTRETA DE LA CONTRETA DEL CONTRETA DE LA CONTRETA DEL CONTRETA DE LA CONTR 3 | OEM / ODM | | | | DOODD DOOD DOODD DOODD DOODD DOODD DOODD DOODD DOODD D4 $: \Pi\Pi\Pi\Pi\Pi\Pi\Pi\Pi\Pi\Pi\Pi\Pi\Pi\Pi$

000000 0000 0000 30 ~ 7 0 00000 0000 5 ~ 1 00000 :0000 0 6

nnn nnnnn nnnnn nnnnn nnnnn 7: T/Tn nnn nnn n nnnnn nnnnn

 $\Pi: T / T$ $\Pi: \Pi$

OCCUPATION OF THE CONTRACT OF

.000000000000

ann rfid anno 20 aa anno ann anno a anno a anno a anno a