

--	--	--	--	--	--	--	--

11

1.
2. 20 5
3.
4.
5. LED
6.
7.

--	--	--	--

[illegible]

1111

00

□ □ □ □ □ □ □ □ □ □

0000

111

1111

5/5

1111

LED□□□

11

□□□□□□

1111

11

11

11

1111

11

1111

□□□□□

1111

□□□□□□□650nm

0°200mm @ UPC / EAN PCS = 90°

5□□□□

20□

1650人/日

0.1□□

30□□UPC / EAN 100□□

□□LED□□□□□□

□□□□□□□□

HID USB□USB□□COM□RS232

□x□x□□114mm * 114mm * 156mm

290g□□□□□□

1.8M

5vdc +/- 10%

CDRH IIa IEC 60825-1 1

UPC / EAN / JAN□UPC-A□UPC-E□EAN-8□EAN-13□JAN-8
□JAN-13□ISBN / ISSN□Code 39□□□□□ASCII□□Codabar
□NW7□□Code 128□EAN 128□Code 93□Interleaved 2 of 5
□ITF□□□□2 of 5□IATA Code□MSI / Plessy□□□□□□□Code
32□□□□□□□□RSS 14□RSS Limited□RSS□□



CAUTION  **LASER LIGHT, WHEN OPEN**
DO NOT STARE INTO BEAM
Complies with IEC 60825-1 and IEC 60825-2 for classification
permanently Laser Notice No. 50 dated July 14, 2011
CLASS II LASER PRODUCT
ACCURACY: 1/8" @ 100' ± 0.001"
PLANT LASER PRODUCT #1 1000000000



CAUTION  **LASER LIGHT, WHEN ON**
DO NOT STARE INTO
CONTAINS BATTERIES. DO NOT OPEN TO AVOID FIRE. DO NOT STARE INTO LASER BEAM.
PARTS ARE NOT TO BE USED FOR ANY OTHER PURPOSE.
EMERGENCY: 1-800-4-A-LEVER (1-800-425-3837)
© 2005 LEICA LASER PRODUCTS, INC. (LPI)
CLASS 1 LASER PRODUCT - HAZARD FREE














How to Use This Barcode Scanner?

1. For better scanning function, please hold this scanner at right angle, don't decode it at 90°.

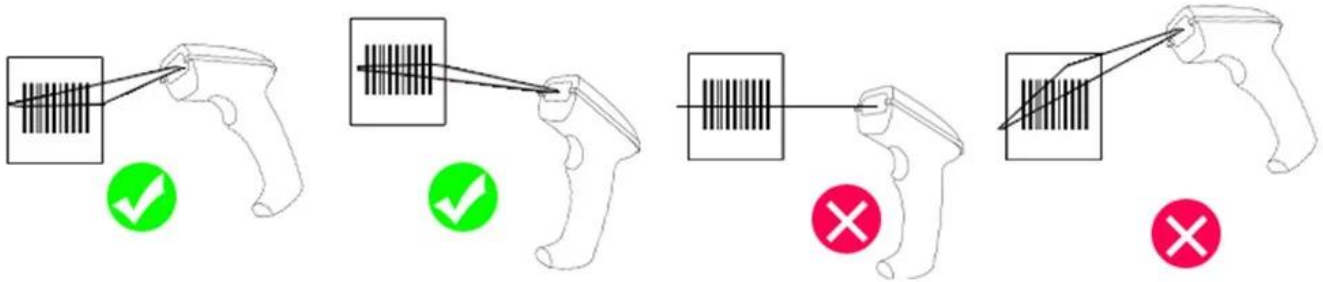

2. For truly decoding the barcode, scanning laser must cover the whole barcode.



How to Assemble/Disassemble the Cable?

Plug sharp things like toothpick or clip into the right hole and then pull out the cable easily.





Shakeproof



Super decoding



Compatible
different terminal



High Cost-Effective

WE PROVIDE THE MOST COMPLETE
PROFESSIONAL SCANNING APPLICATION



Logistics express
barcode



Supermarket
barcode



Medical
barcode



Factory
inventory



Machine
customization

Shipping







ACM26X RFID

125Khz wiegand 26/34
 115mm×75.5mm×16.8mm

ACM26G RFID

125Khz /13.56Mhz
 26/34 / RS232

KR600E RFID

125KHz ID / 13.56Mhz 26
 26





ACM-EMI-S RFID

125Khz EM

86 * 54mm

ACM-MF1 RFID

MF1 1K

ACM-ABS003 RFID

125Khz EM / 13.56Mhz / UHF

- ACM Goldbridge 2

- ACM Goldbridge

