



12V

3A□□□□

□ □ □ □ □ □ □ □ □ □ □ □ □ □ □

□ □

[illegible]

06 Hz · D C U Z V · A

/ 5 A H

U s e c

SP

1. COM 端子は DC12V の電圧を 0-15V の範囲で調整可能;
2. NC 端子は COM 端子と DC12V の電圧を 0-15V の範囲で調整可能 2 端子 3 端子;
3. DC12V の電圧は 4 端子 5 端子;
4. 端子は電圧を 0-15V の範囲で調整可能;
5. 端子は電圧を 0-15V の範囲で調整可能;
6. 12V の電圧は 6 端子 7 端子;


PRODUCT INTRODUCTION



POSITIVE



BACK

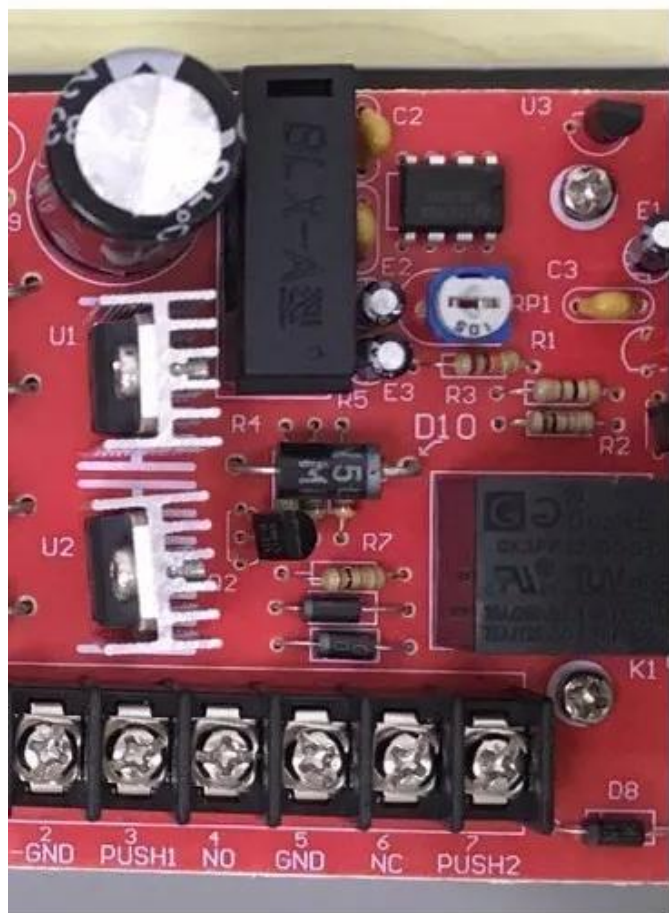



Access Control Power Supply Manual

Input voltage range, small size, high reliability, electromagnetic compatibility, efficiency, protection function, with remote control door, electric lock on the temperature (as compared with the frequency power) greatly reduced.

Features:

Input voltage: 110 ~ 240V AC;

Input Frequency: 50 ~ 60Hz;

Output voltage: DC12V;

Output Current: 3A;

Output voltage trim range: $\pm 10\% \sim \pm 15\%$;

Load:

1% typical;

Output stability:

0.5% typical;

Ripple and noise:

1%, peak to peak (100mVp-p typical);

Insulation voltage:

Junior / sub-polar inter-1500V AC, primary / shell between 1500V AC, sub-polar / shell between 500V AC;

Hold Time: full load typically 20ms;

Operating temperature: $-20 \sim +65^{\circ}\text{C}$;


Overload protection: All outputs in a short circuit, overload are protected; power output of 0-15 seconds delay locks;

Outer steel case size:

120mm $\times$ 95mm $\times$ 38mm

Weight: 315g

Output terminal wiring

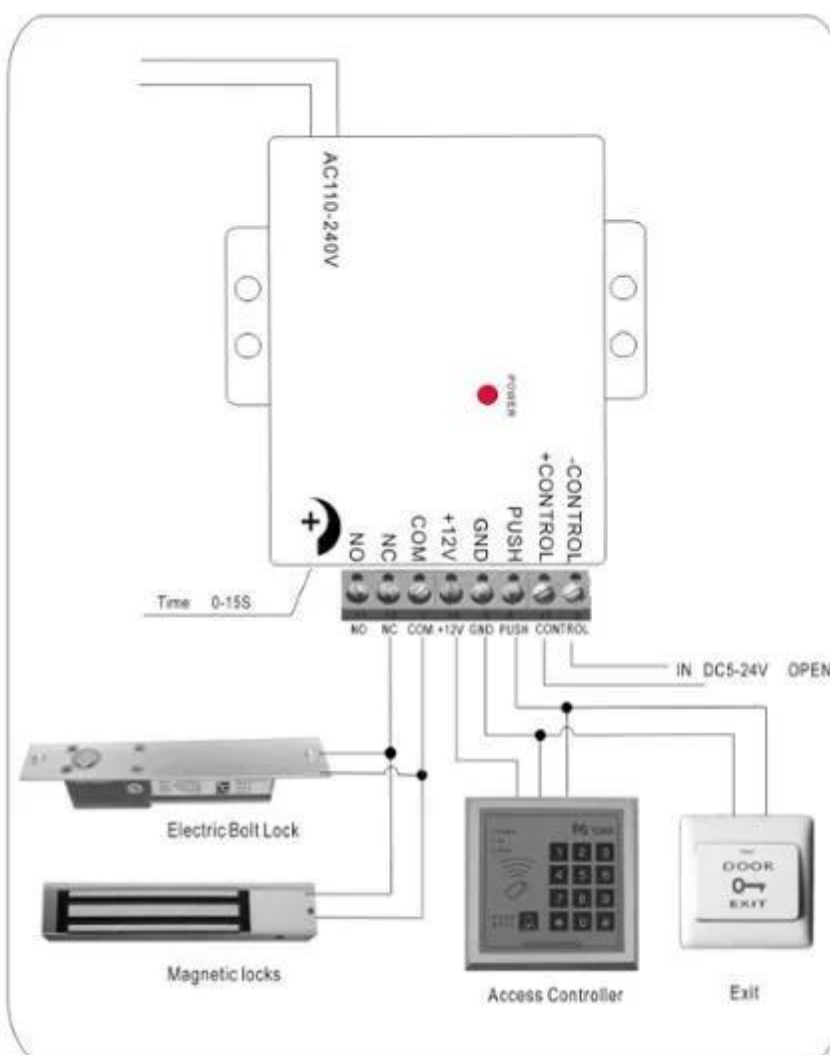

Attention! then electronically controlled lock must be transferred to 0 seconds delay, to prevent burning of electric locks.

Access controller Keypad

[illegible]

□ □ □ □ □ □ □ □ □ □ □ □ □ □

2000 RFID

[illegible]

CO FTA F

00E ...000000000000000000000000


EXW FOB FCT CIF CFR ...

□ □ □ □ □ □ □ □ □ □ □ □ □ □ □ □

□□□□□□□3□□□□□□□!!!


20 “ ”



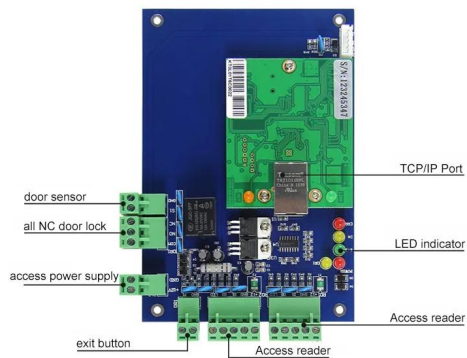


ACM-WEG01

□□□□□1□□

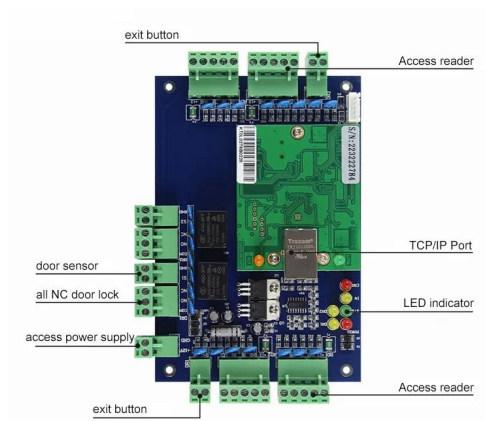

ACM-WEG02

□□□□□2□□

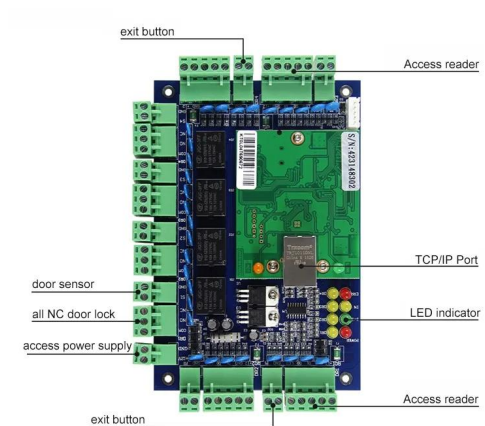

ACM-WEG04

□□□□□4□□

You May Like



ACM-K2A / B.

□□□LED□□□□Realese□□□□



ACM-Y280

□□□□□□280kg / 600□□



ACM-Y806-5A

□□□□□□□□5A



ACM225

RFID 12kHz



ACM-210

RFID Wiegand



ACM26x.

125KHz EM RFID

115mm×75.5mm×16.8mm



ACM-EMI-S

125KHz TK4100 RFID



ACM-EM

RFID 125kHz 13.56MHz
860-960MHz



ACM-WBT-EM

125kHz 13.56MHz 1K



ACM Goldbridge

RFID 20 RFID RFID RFID RFID
RFID



公司优势

1. 工厂直接生产

2. 24小时服务

3. OEM / ODM 服务

4. 工厂直接生产

5. 工厂直接生产

6. 工厂直接生产

7. 工厂直接生产

8. 工厂直接生产

9. 工厂直接生产

10. 工厂直接生产

11. 工厂直接生产

12. 工厂直接生产

工厂优势

1. 工厂直接生产

2. 工厂直接生产

3. 工厂直接生产

工厂优势

工厂优势

1. 工厂直接生产

2. 工厂直接生产

3. 工厂直接生产

4. 工厂直接生产