

WiegandRFID

ACM-A30 Wiegand

[illegible]

1
1
5
x
7
2
2
m
m

W
G
2
6
/
8
4

8
0

E
M

9
0
4
N

1
2
5
K
H
z
E
M
/
1
3
.
5
6
m
h
z
□
□
□
1
.
1
□ 8
2
□
3
6
i
n

[illegible]

11

1.

□□□□□□□□

2.□□Wiegand 26□□□□□□□□□□□□

3.□□□□□□□□□□□□□□□□

4.□□□□□□□□□□□□0.1□□

5.□□□□□□□□□□□□8000□

6.□□□□□□□□□□□□□□□□

□□□

7.exit□□□□□□□□□□

Product function

- ◆ Touch panel, doorbell button
- ◆ Metal case with blue backlight
- ◆ WG26/34 input/output
- ◆ Support Card, Pin, Card + PIN
- ◆ Full programming from the keypad
- ◆ Humanized tamper alarm function
- ◆ Can set up a management card
- ◆ Active and passive lock signal output
- ◆ Imported double point relay output signal
- ◆ Contactless for RFID transponder technology
- ◆ Connection for external release button (Exit button)
- ◆ Memory capacity: 8000 user cards and 1 passwords
- ◆ Does not need to connect on computer, it can works alone
- ◆ The same series of access control support data copy and backup
- ◆ Can be used when the password read head and one machine



Welcome To Goldbridge Ltd

ACM-A30 touch metal access controller

RFID card,
password,
RFID card+password,
8000 users, large capacity !



Lightning delivery



Global sales



Package mail



Technical support



After-sale



Red Bronze



Green Bronze



Golden



Silver



White Bronze


□□□□

□□Wiegand 26/34□□□□□□□□□□

ACM-A30 Model



Wiring diagram

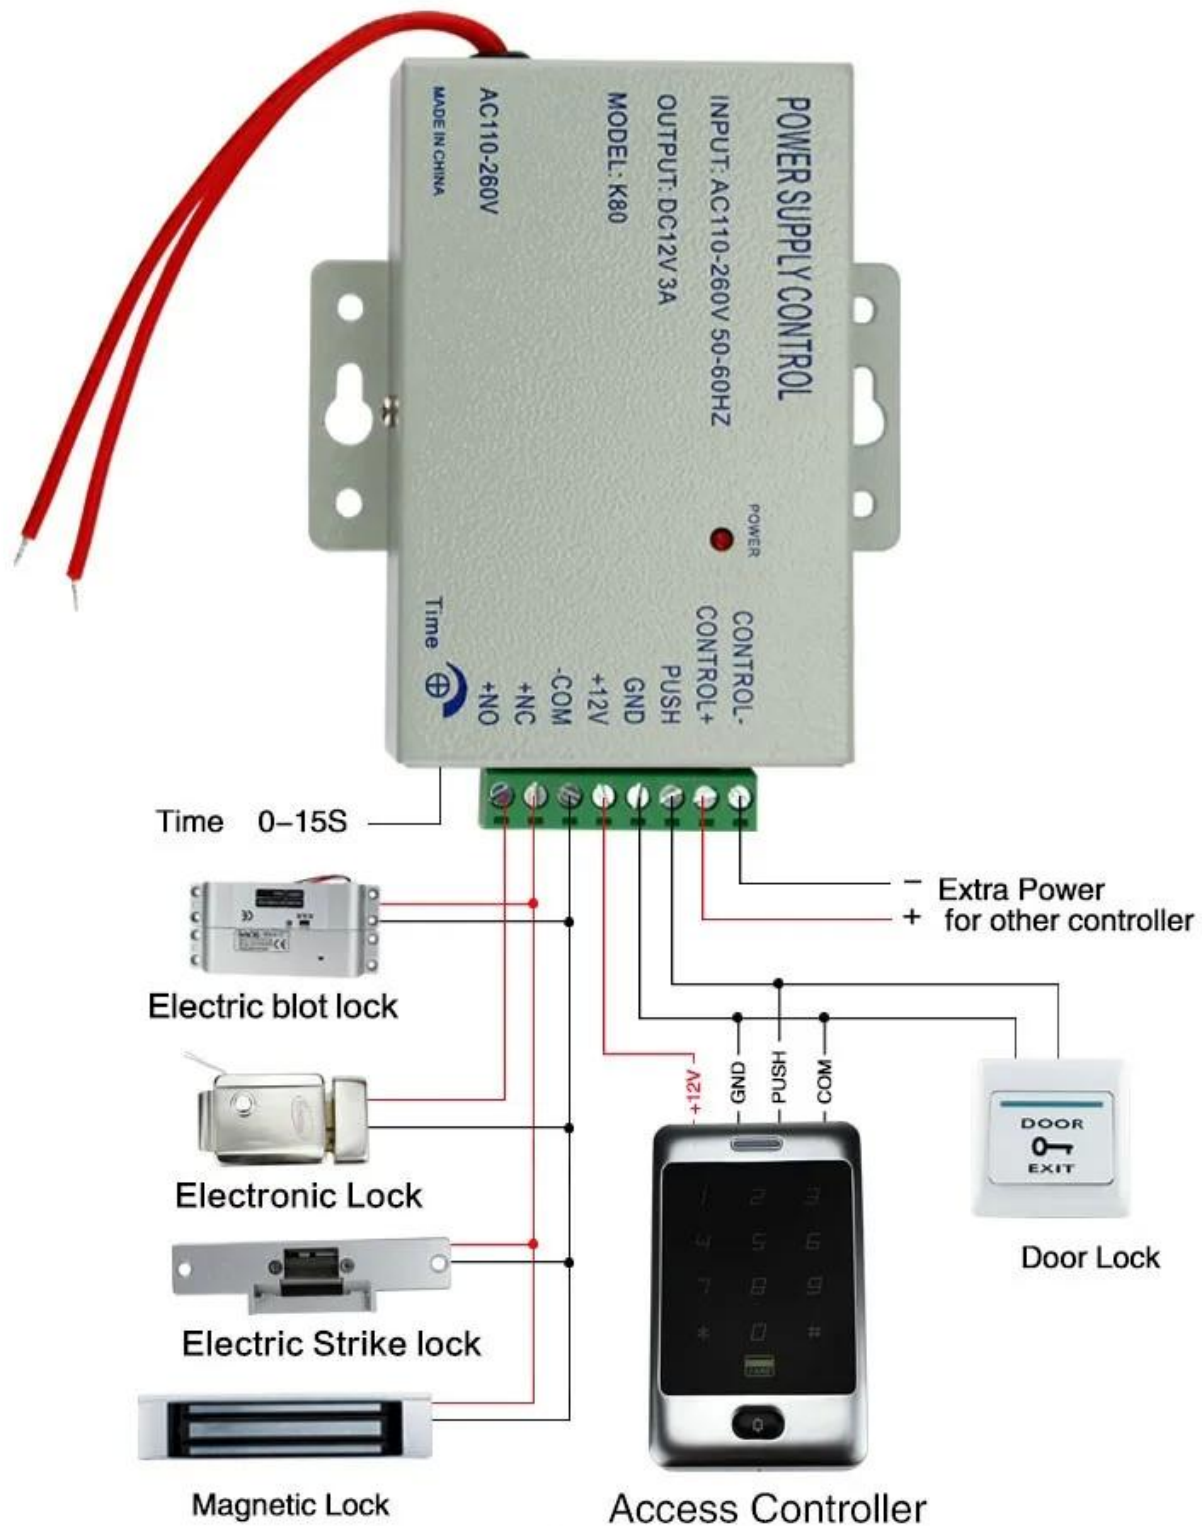

Attention when electronically controlled lock must be transferred to 0 seconds delay, to prevent burning of electric lock.

[illegible]

ACM223

Touch Keypad RFID&125Khz
EM 1000/4000 U Ser

ACM209-NW

RFID AccessControl

125Khz EM

ACM208

RFID



ACM210

RFID

ACM225

RFID 125Khz EM

ACM211B

RFID

- 1
- 2
- 3 OEM / ODM
- 4
- 5
- 1
- 2
- 3
- 6
- 7
- 8

1

2

3

4

5

6