



860960Mhz RS232 RS485 GPRS TCP / IP RFID

- 1 ISO18000-6C EPC C1G2
- ISO18000-6B
- 2 ISO-18000B EPC
- 3 5M-10M
- 4 SDK
- 5 26 rs232 / 485 TCP / IP


H
e
r
b
A
C
M
-
8
3
B
L
E
D



Interface:

- Standard interface have RS232,RS485 and Wiegand 26



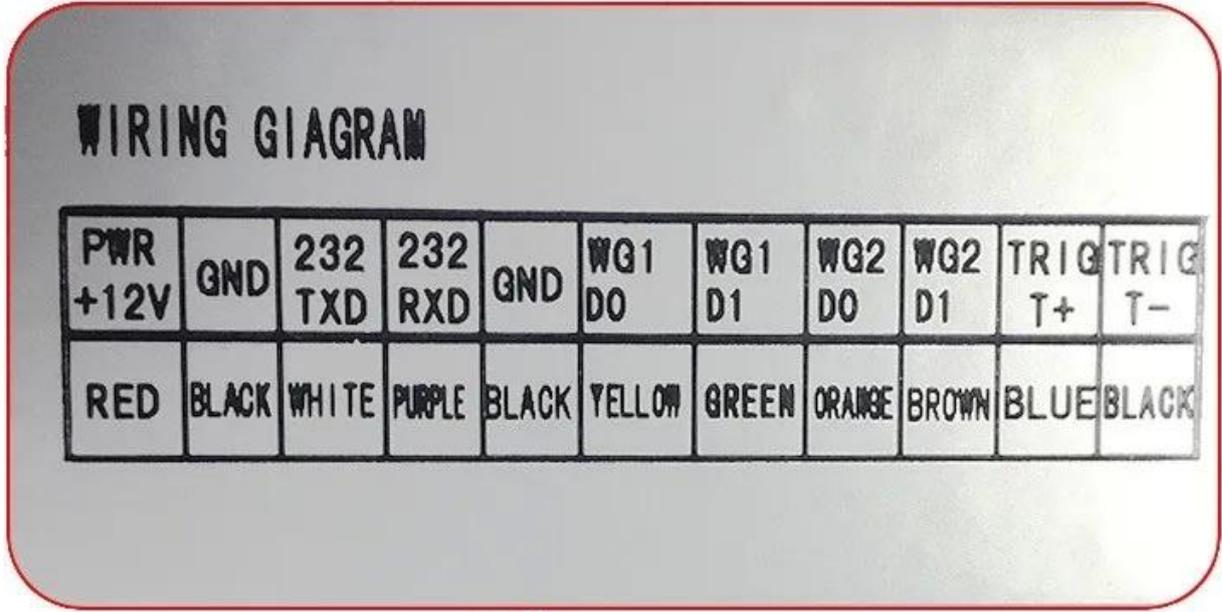

□□

RFID UHF□□□□□□

□□UHF RFID□□□□□□860-960Mhz UHF□□□□□□□□□□USB□□RFID□□□

- 1□ □□ □□
- 2□ □□ □□
- 3□ □ □□□□

- 4□□□□□
- 5 □□ □□
- 6□ □□□ □□
- 7□□□□□□□
- 8□□□□□



Vehicle access control system



Personal ID access control



Hand free applications




Asset management

← Application



UHF CARD



Work Mode Reader Parameter

Port Setting

Port:

Baud Rate:

Workmode Select

M-S Timer Triggering

Adjacent discrimination

ID Adjacent discriminatio

Time *1S

Timer Parameter

Time Intervals *10ms

Triggering Parameter

Triggering:

Automatically shutdown S

Port Setting

Connect Port:

RS-232 Parameter

Baud Rate:

RS-485 Parameter

Baud Rate:

Wiegand Parameter

Wiegand Mode:

Pulse Width: *10us

Pulse Cycle *100us

User Code

User Code:

Operation Record:

Time	Operation Result
15:59:34	Open port Success!
15:59:34	Reader SoFWare Version is V1.53!



□□□□

□□
UHF□□□□□□□□1□□□□10□□
□□□□32 * 32 * 6cm□□□□5kg□



ACM812A

2-5m UHF

26 RS232 / 485

ACM818A


10-20m UHF

26 RS232 / 485

ACM802A

8-10m

26 RS232 / 485

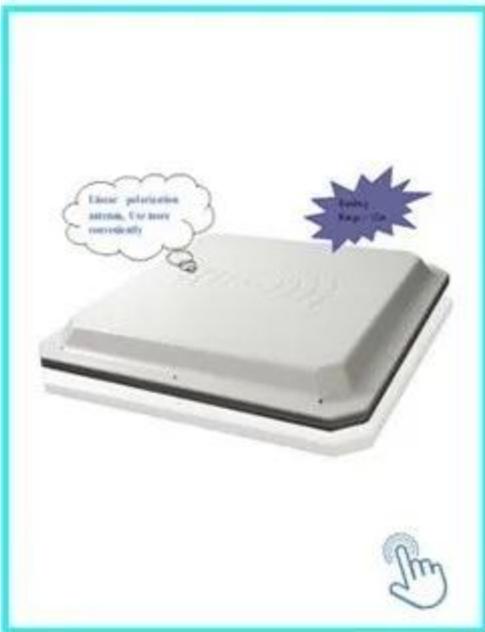



ACM801A
 10-15m UHF
 26 RS232 / 485
 ACM 8017
 UHF
 + WIFI + GRPS
 ACM 918K
 UHF 4



1
 2
 3 OEM / ODM

4 品牌 fashion desing 品牌

5 品牌

1 品牌

2 品牌

3 品牌 2-3 品牌

6 品牌 品牌 1 5 品牌 7 30 品牌

7 品牌 品牌

品牌

1. 品牌

品牌

2 品牌

T / T Paypal Western Union

品牌 DHL FedEx TNT UPS

3. 品牌

品牌

4 品牌

品牌 35,000 3-7 品牌 100,000 7-15 品牌

5 品牌

品牌 OEM 品牌

6 品牌

品牌 20 品牌 RFID / NFC 品牌 / RFID 品牌 / RFID 品牌 RFID 品牌