



Fail Safe Electric Strike ☐
Y-136SNO / NC ☐ PVC ☐
☐
☐

[illegible]


D C 1 2 M V D 4 P V C + 2 C - 1 6 + 5 5 C B 4 0 9 0 0

11

*500

*

*

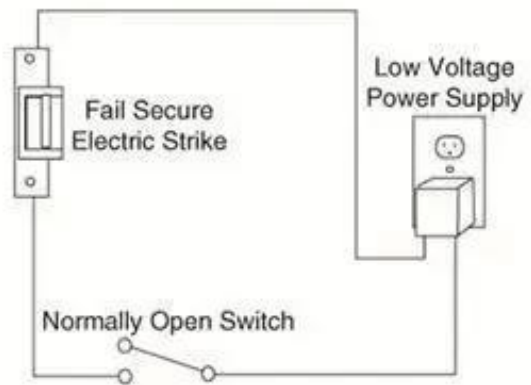

□□□□□□□□□□□□□□□□NC / NO□

03 Low temperature design

less heat is safe and reliable.



04 Low Power Design

Rated Operating Voltage: DC 12V
Current: 240mA(Fail-secure) /
120mA(Fail-safe)

05 High-quality Aluminum Case

Made of high-quality aluminum for high hardness,
corrosion resistance & anti-deformation.





You may need





ACM-Y280

280mm / 600mm

ACM-Y100S

100mm

&NO / NC Power

ACM-Y066

66mm

130x98x41mm

100mm

1 24mm

2 100mm

3 OEM / ODM

4 100mm & 100mm

5 100mm

1 100mm

2 100mm

3 100mm 2 - 3mm

6 100mm 1~5mm 7~30mm

7 100mm T / T Western Union Paypal

8 100mm DHL FEDEX TNT UPS EMS SEA Air



1

2

T / T Paypal

DHL FedEx TNT UPS

3

4

3-9 5000pcs 7-15 100,000pcs

5

OEM

6

RFID/ NFC/ RFID/ RFID rfid 20