







Specifications:

Card type: EM

Working voltage: DC12V $\pm$ 10%

Reading Range: 3-6cm

Humidity: 10% to 90% RH

Door Opening Time: 0-99s (Adjustable)


Static electricity: $\leq$ 30mA

Ambient temperature: -45 °C ~ 60 °C

Electric lock output: $\leq$ 1A

Short-circuit Protect: $\leq$ 100 μ S



Dimensions: 114*75*16mm

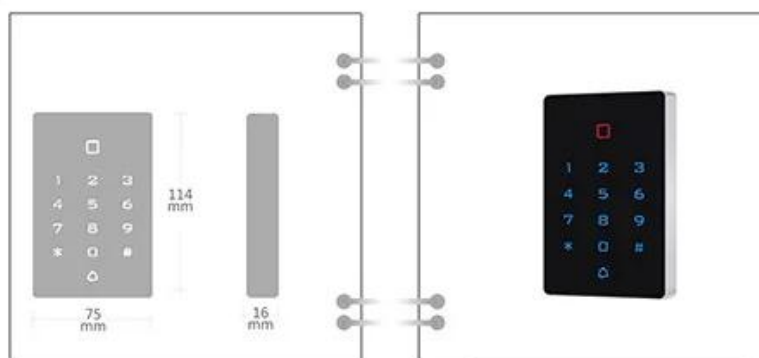

Product Feature

- ◆ Digital backlit touch keypad
- ◆ Multi-function standalone access controller and reader,
- ◆ WG interface: WG26 Input / output
- ◆ Capacity: 2000 cards / codes
- ◆ Three accesses: card, pin, card + pin

• • • • • PRODUCT DETAILS • • • • •

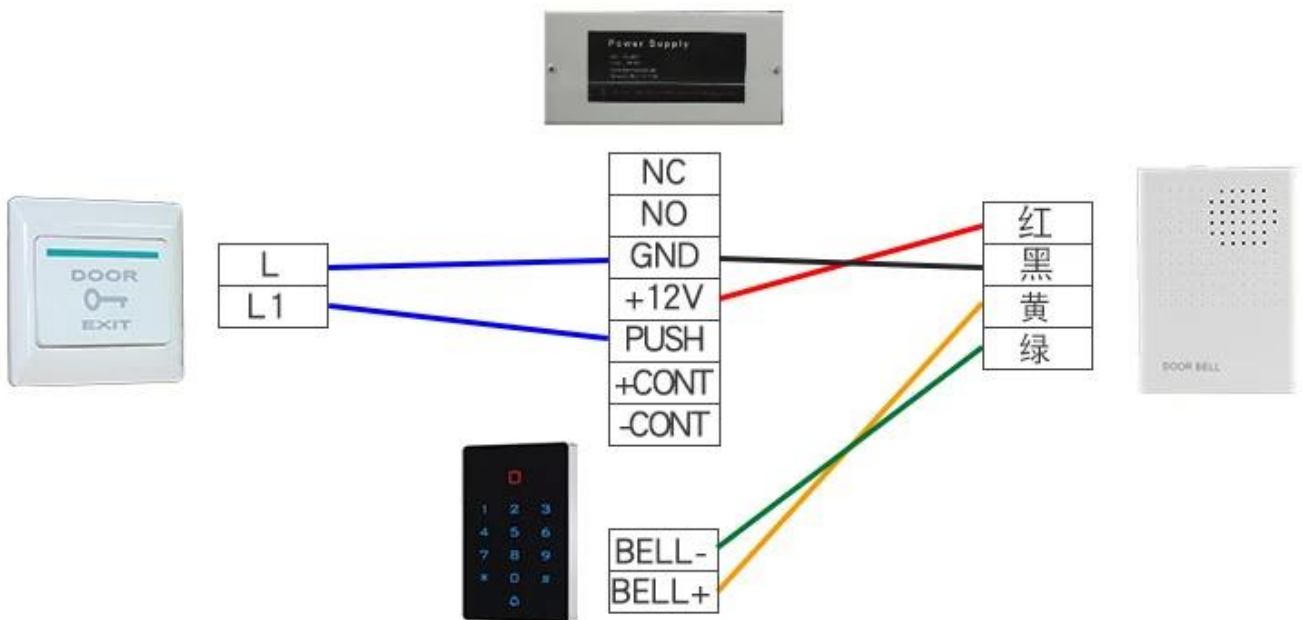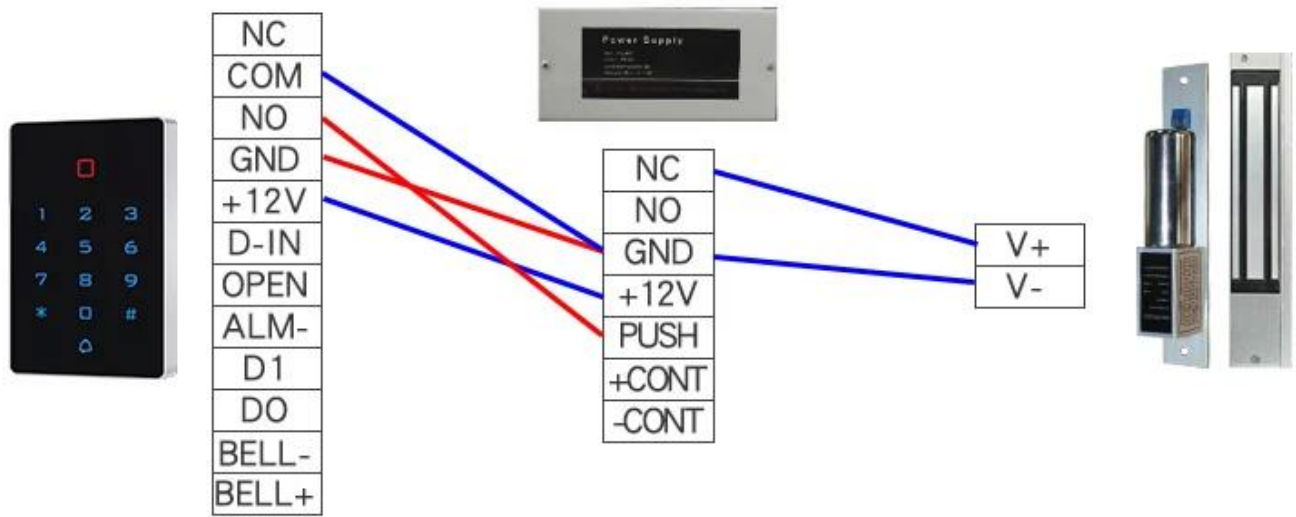



4 doors system diagram



□□	□□□□□
□□	125KHZ
□□	110 * 71 * 15□
□□□□	□□12V
□□□□	30MA

服務項目

1. 24小時服務
2. 專業設計、生產、銷售、服務
3. OEM / ODM
4. 專業fashion設計、生產、銷售、服務
5. 專業設計
1. 專業設計、生產、銷售、服務
2. 專業設計、生產、銷售、服務
3. 專業設計、生產、銷售、服務2-3天
6. 專業設計、生產、銷售、服務1-5天、7-30天
7. 專業設計、生產、銷售、服務T / T、Western Union、Paypal、Ali
8. 專業設計、生產、銷售、服務DHL、FEDEX、TNT、UPS、EMS

服務項目

ACM Goldbridge
RFID 20 RFID RFID RFID
RFID RFID

