







Specifications:

Card type: EM

Working voltage: DC12V±10%

Reading Range:3-6cm

Humidity: 10% to 90% RH

Door Opening Time:0-99s(Adjustable)


Static electricity: ≤30mA

Ambient temperature: -45 °C ~ 60 °C

Electric lock output: ≤1A

Short-circuit Protect: ≤100μS



Dimensions: 114*75*16mm

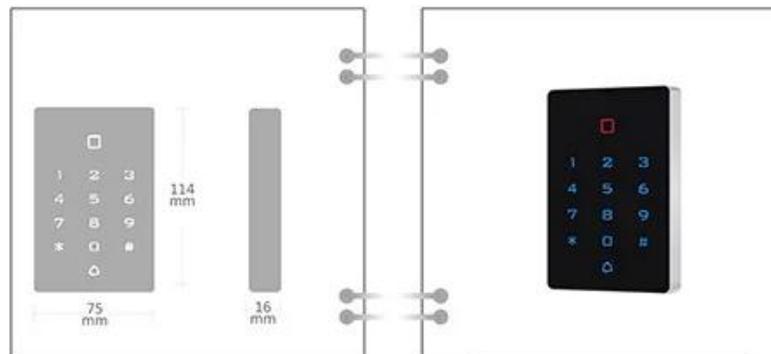

Product Feature

- ◆Digital backlit touch keypad
- ◆Multi-function standalone access controller and reader,
- ◆WG interface: WG26 Input / output
- ◆Capacity: 2000 cards / codes
- ◆Three accesses: card, pin, card + pin

••••• PRODUCT DETAILS •••••

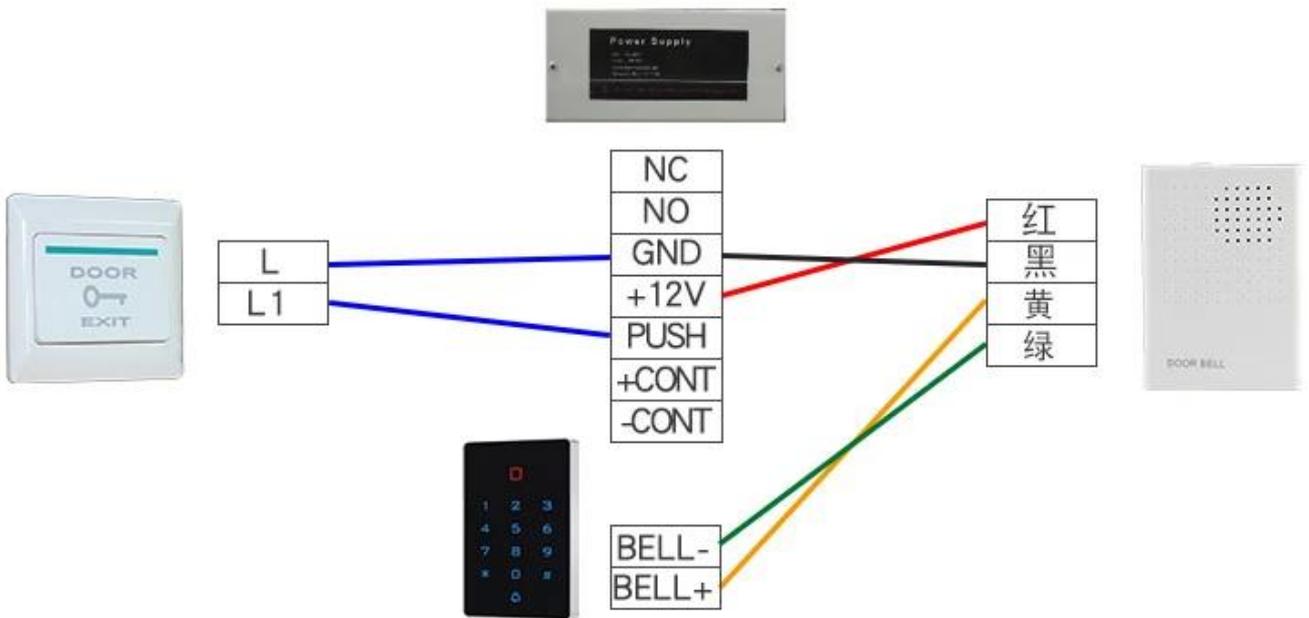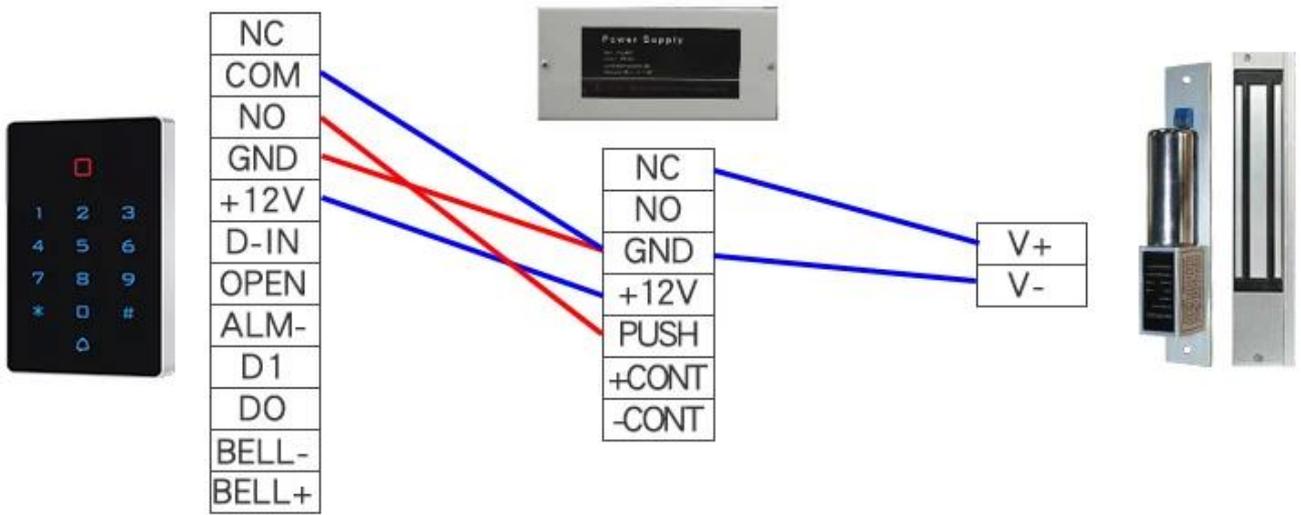



4 doors system diagram



□□	□□□□□
□□	125KHZ
□□	110 * 71 * 15□□
□□□□	□□12V
□□□□	30MA

□□□□

- 1 24
- 2
- 3 OEM / ODM
- 4 fashin
- 5
- 1
- 2
- 3 2-3
- 6 1 5 7 30
- 7 T / T Western Union Paypal Ali
- 8 DHL FEDEX TNT UPS EMS

□□□□

ACM Goldbridge
 RFID 20 RFID RFID RFID
 RFID RFID

