

A

[illegible]

R S 2 3 2 R S 4 8 5 W i e g a n n 2 6 T i r g g e r 4 2 2 k m 7 h

EPCC Class 1 Gen 2



Front Side




Back Side

Standard interface

Optional interface



RS232.485, Wiegand26

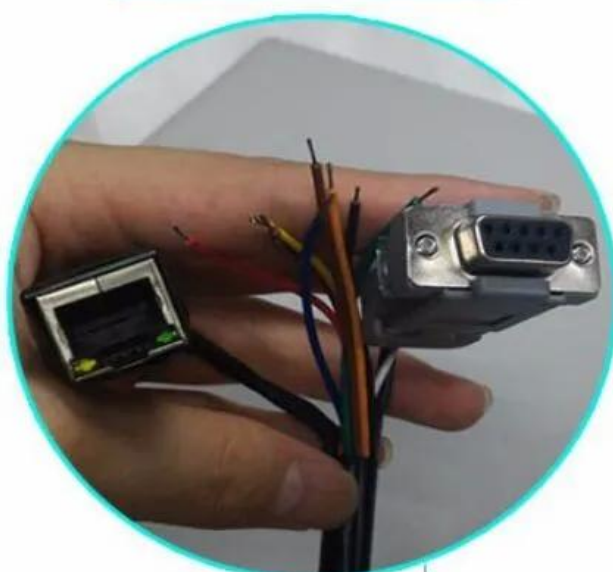

Ethernet , TCP/IP



RFID UHF

RFID UHF

RFID UHF

- ACM Goldbridge

- 〇〇〇〇〇〇〇〇〇〇ACM Goldbridge〇〇〇〇〇〇〇〇
- 〇〇〇〇〇〇〇〇〇〇〇〇〇〇〇〇〇〇〇〇〇〇

〇〇

RFID UHF〇〇〇〇〇〇〇〇

1〇〇〇〇〇〇

2〇 〇〇 〇〇

3〇〇 〇〇〇〇〇〇


4〇〇〇〇〇〇


5〇 〇〇 〇〇

6〇 〇〇〇 〇〇

7〇 〇〇〇〇 〇〇

8〇〇〇〇〇〇

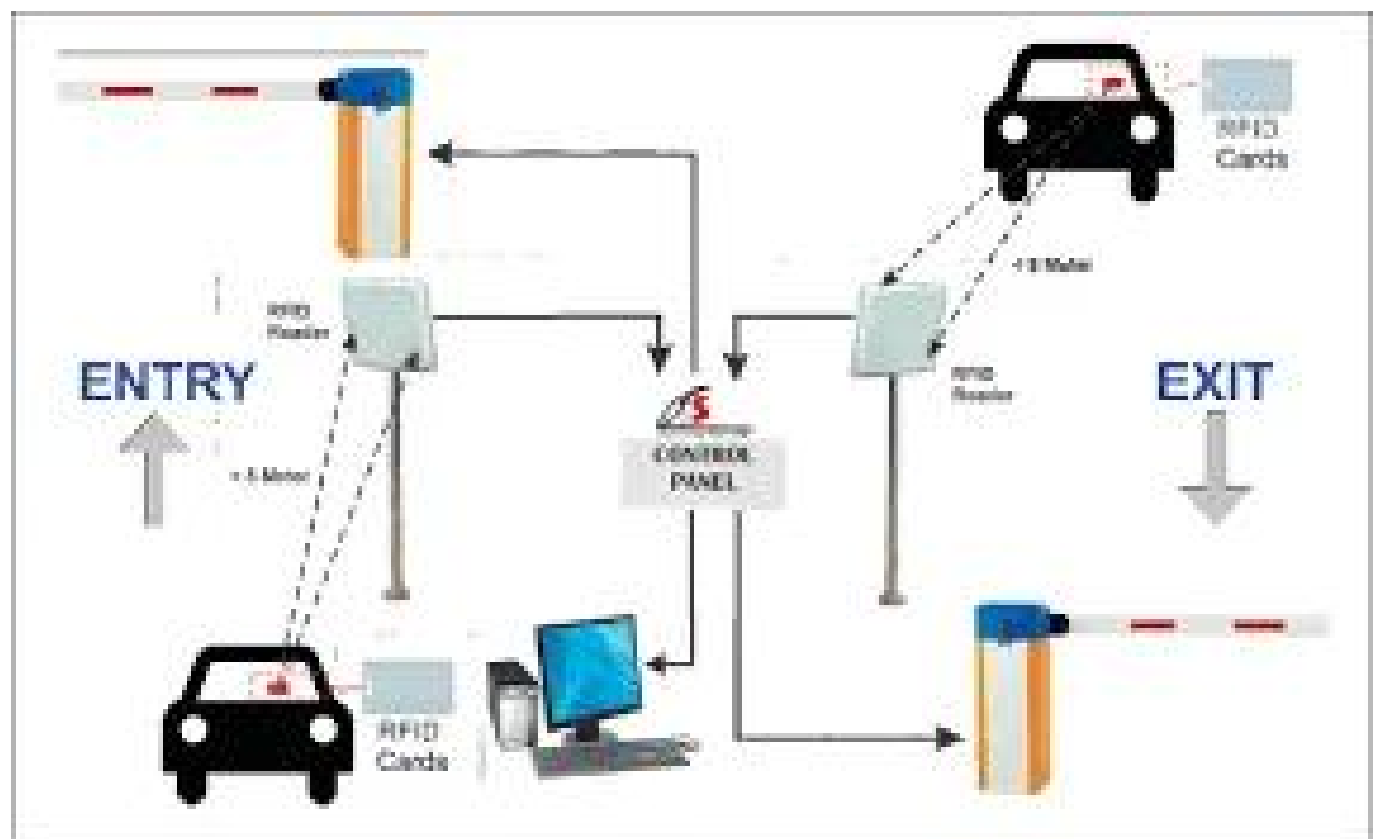

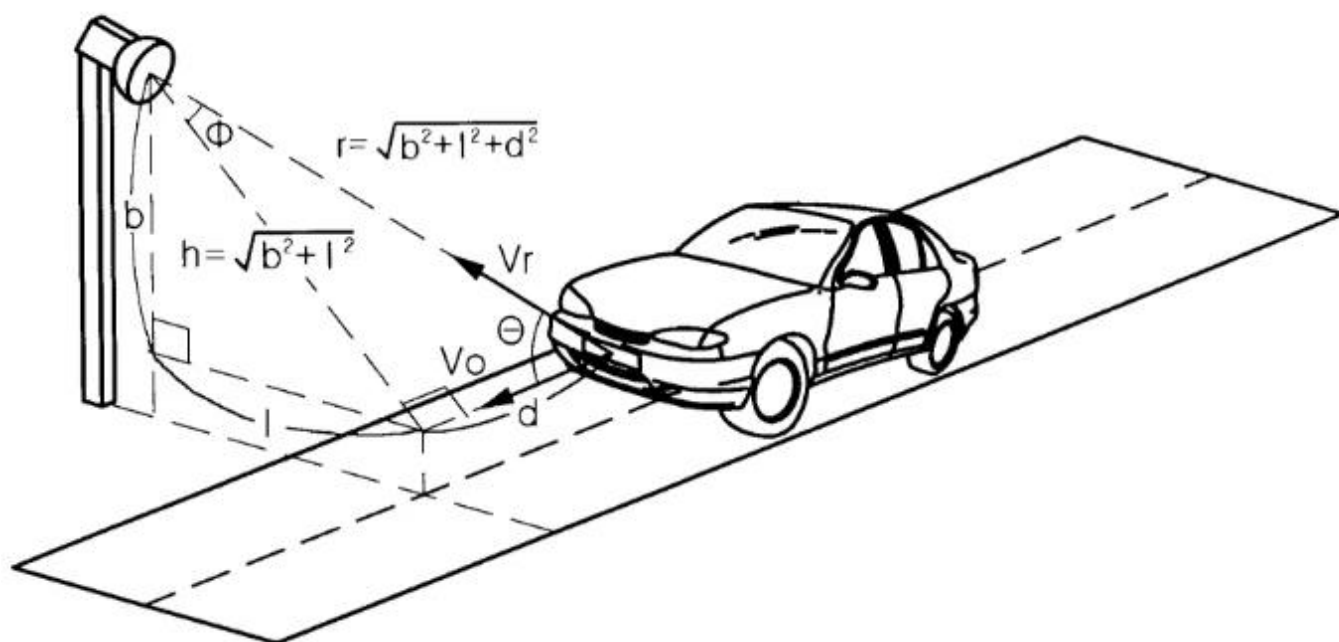

□□□□□

□□
 UHF□□□□□□□□1□□□□10□□
 □□□□□32 * 32 * 6cm□□□□6kg□

製品紹介

uhf製品としてACM812A、ACM802A、ACM818A、ACM801Aの4種類があります。
ACM801Aは200W出力の製品です。





ACM812A
2-5m UHF
Wiegand 26 RS232 / 485

ACM818A
10-20m UHF
Wiegand 26 RS232 / 485

ACM802A
8-10m UHF
Wiegand 26 RS232 / 485





ACM801A
10-15m UHF
Wiegand 26 RS232 / 485

ACM 8017
UHF
UHF + WIFI + GRPS

ACM 918K
UHF 4

0020000000000000
 00T / T0Paypal000000
 0000000000000000DHL0FedEx0TNT UPS00

4
3-9 5000pcs 7-15 100,000pcs

6

RFID / NFC / RFID / RFID rfid 20