


Kindly remind:

All network control board must configure with access power supply.
1 board for 1 power supply

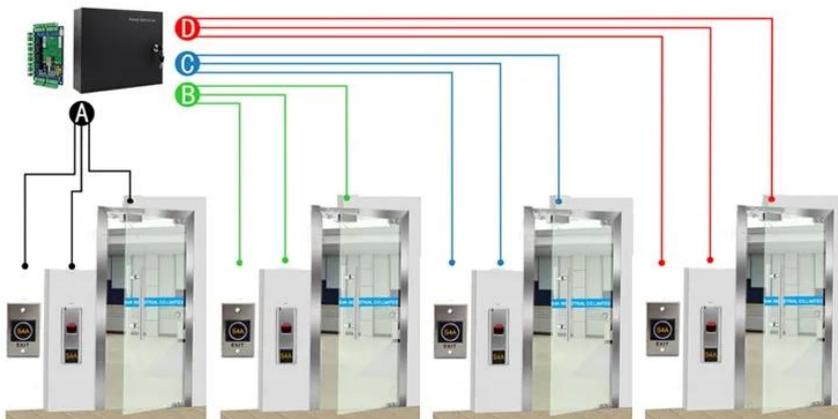

ACM-WEG04

Four doors 1 way: Control 4doors (Enter by Swipe cards and Exit by Push button)



ACM-K2A / B.

□□□LED□□□□Release□□□□



ACM-Y280

□□□□□□280kg / 600□□



ACM-Y806-5A

□□□□□□□□5A



ACM225

RFID 12kHz



ACM-210.

RFID Wiegand



ACM26x.

125KHz EM RFID
115mm x 75.5mm x 16.8mm



ACM Goldbridge

RFID 20 RFID RFID RFID RFID
RFID

