




12V 3A

12V 3A
12V 3A
12V 3A
12V 3A
12V 3A
12V 3A
12V 3A
12V 3A
12V 3A
12V 3A

12V 3A
12V 3A
12V 3A

12V 3A
12V 3A

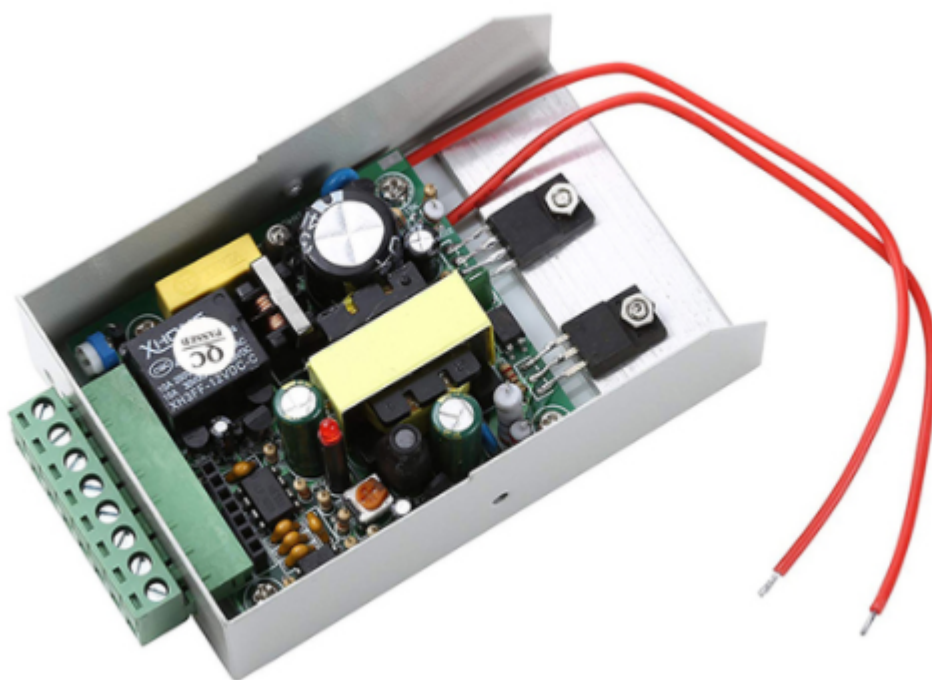

12V	K80
3A	AC110-240V
12V	DC12V
3A	3A
12V	30W
3A	12V
12V	0-15V
3A	104×69×33mm
12V	0.32KG






Metal Shell

Stylish & Simple Metal Case,
Compact Size, Safe & Convenient
To Use

Delay Adjustment

Power Supply With Delay Design 0-
15 Seconds Adjustable



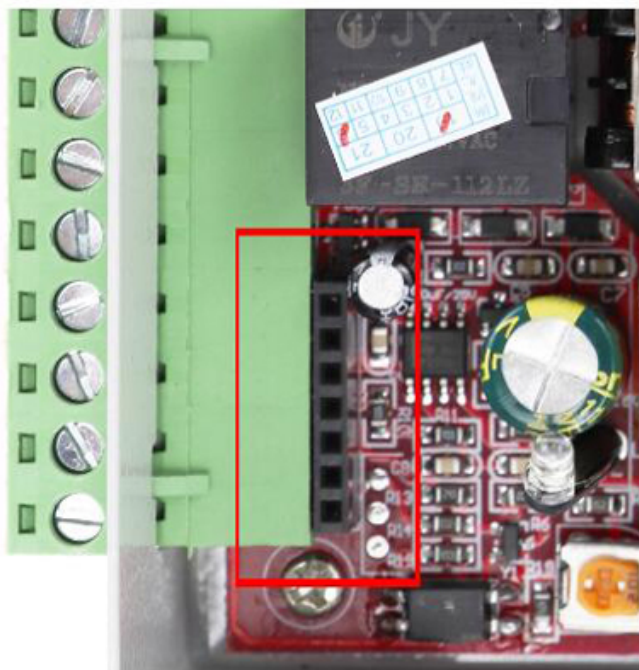

Module Slot

Access Control Power Supply
Built-In Module Slot Pluggable
Remote Control Module

Safety Device

Each Power Interface Is Designed with A Fuse Device. When The Voltage Is Too High, It Will Automatically Power Off & Be Safer To Use.







Voltage Regulation

12V Output Adjustable 9-14V
Adjustable

Capacitance

With Battery Depletion Protection
& Dual Relay Design

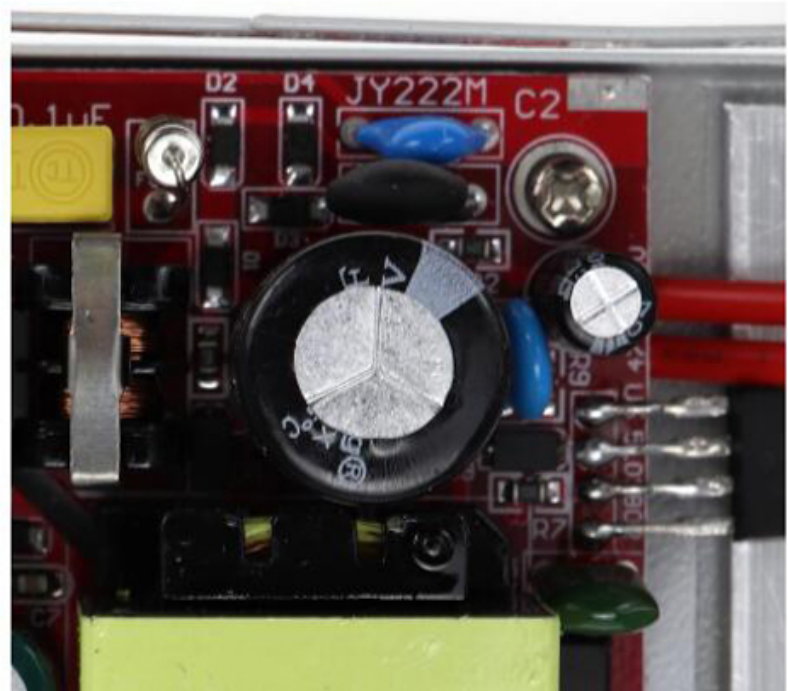

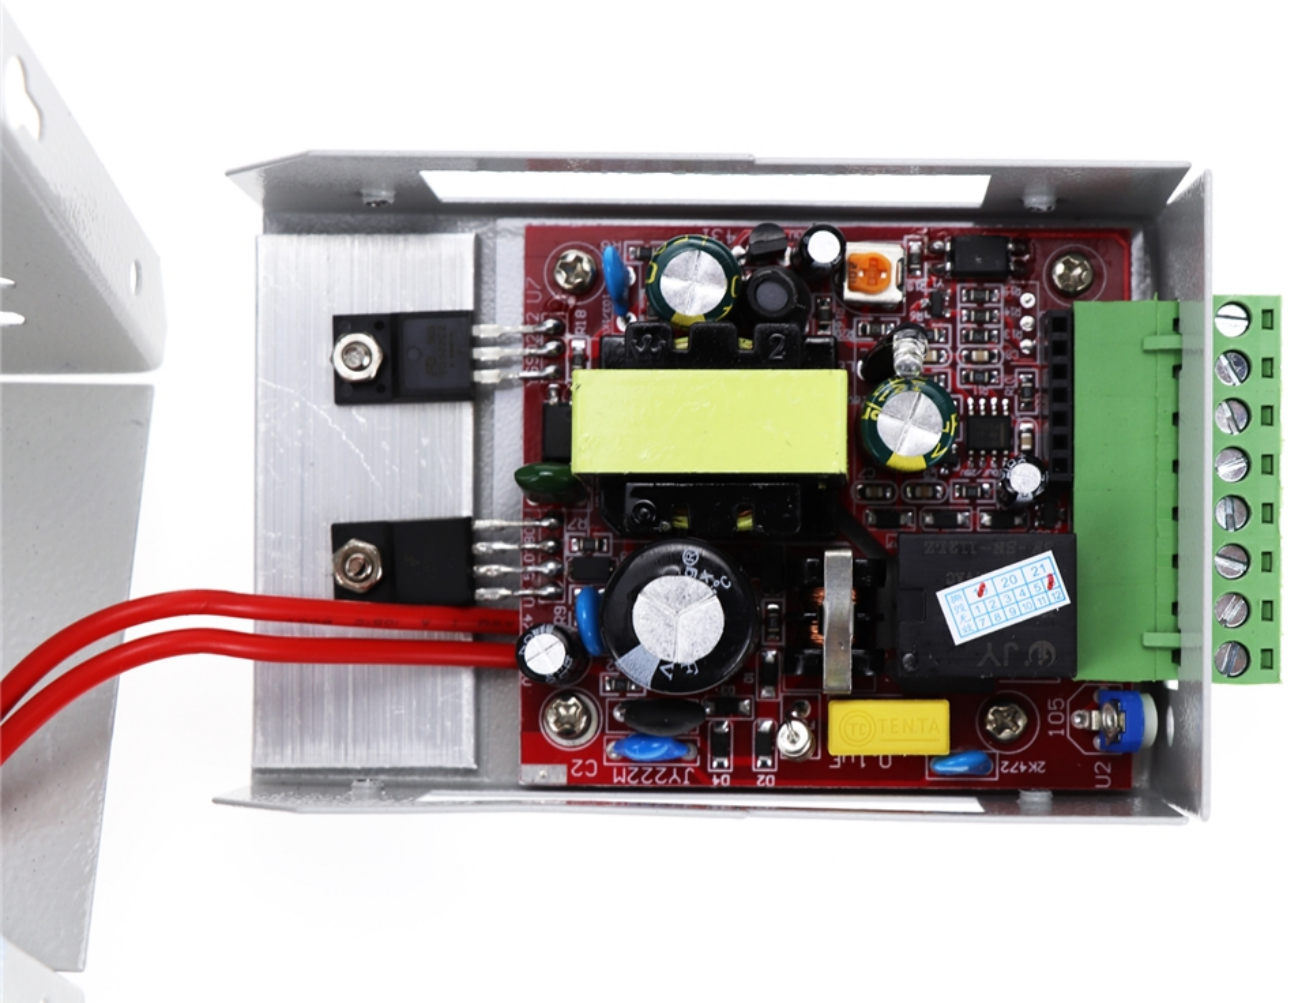



POWER SUPPLY CONTROL

INPUT: AC110-240V 50-60HZ
OUTPUT: DC12V 3A

AC110-240V

CONTROL-
CONTROL+
PUSH
GND

+12V
-COM
+NC
+NO

Time 

Production Workshop



□□□□



RE:Access Control Power Supply

NEW  ACM-Y802-3A Power Supply and door release exit button Dual Function AC110V-240VDC, 12V 3A	 M801B-3A /5A Access Control Door Power Supply Size: 190Lx85Wx80H(mm) AC110V-240VDC	 M806B-3A /5A Access Control Door Backup battery Power Supply Size: 190Lx85Wx80H(mm) AC110V-240VDC		
 ACM-Y803A Voltage: DC 12V /3A	 ACM-Y806-3A Voltage: DC 12V /3A AC110V-240VDC	 ACM-Y806-5A Voltage: DC 12V /5A AC110V-240VDC	 ACM-Y801-3A Voltage: DC 12V /3A AC110V-240VDC	 ACM-5A 12V 5A door control system 12V 5amp access power supply with battery backup (Special For access control board use) Size: 279x234x67MM Input Voltage:110-240V Voltage: DC 12V /3A

RE:Door Loop / Door Closer

ACM401 Door Loop 	ACM601F 200mm Metal ACM601S 200mm stainless steel 	ACM-101 130mm Longer ACM-102 180mm Longer 	ACM-301 400mm Longer 	ACM-201 400mm Longer 	Door Closer ACM-M59 25-45KG ACM-M60 45-65KG ACM-M61 65-85KG 
---	---	---	---	--	--

RE:Sensor and Siren For Access Control System



 Item: AS603 Piezo Strobe Siren Operating voltage: 12VDC	 Item: AS31 Operating distance: 16mm ±5mm Switch output: NC	 Item: AS32 Operating distance: 18mm ±5mm Switch output: NC	 Item: AS36 Operating distance: 40mm ±10mm Switch output: NC	 Item: AS57AC Operating distance: 18mm ±5mm Switch output: NC Applies to steel door	 Item: ACM-MD601 Standard Wall Mount Door Holder Holding force: 60kg(120Lbs)	 Item: ACM-MD602 Glass door Mount Door Holder with door signal Holding force: 60kg(120Lbs)
---	--	--	---	---	---	---

RE:Remote Control For Access Control System

 Item: ACM-K19 Metal WIRELESS Remote Control	 Item: ACM-K18 WIRELESS Remote Control	 Item: ACM-K20 WIRELESS Remote Control For Automatical Door,NO/NC/COM 115*40mm	 Item: ACM-K19A Metal Access Control WIRELESS Remote Control 2 channel	 Item: ACM-K19B Metal Access Control WIRELESS Remote Control 4 channel
---	---	---	--	---


Whatsapp: +86-14554918707 , E-mail: lilyjiang_06@163.com, sales@goldbridgesz.com ; www.goldbridgesz.com

For More Proudcts Price List and informations , Please contact our sales at sales@goldbridgesz.com, thank you !

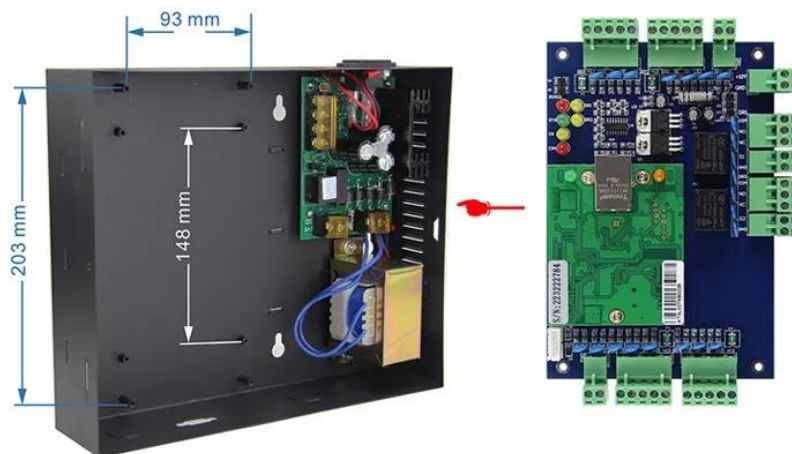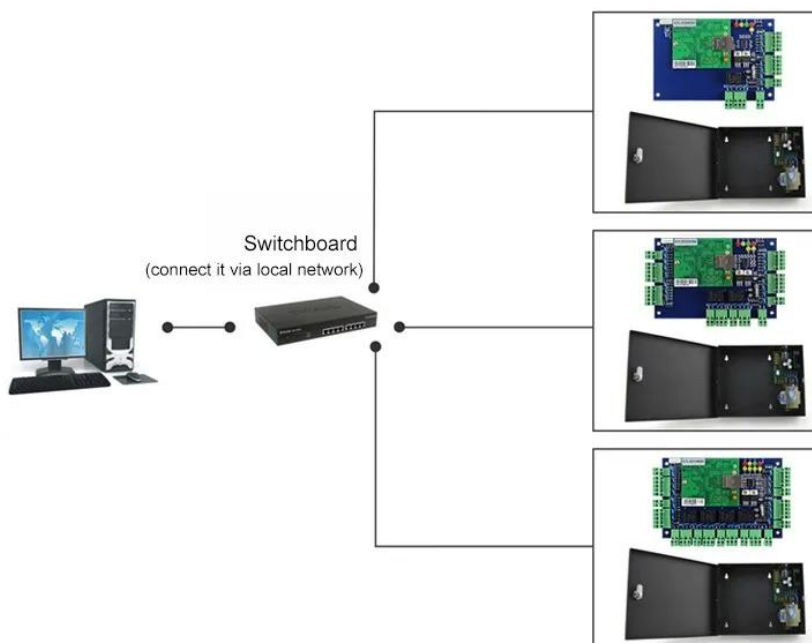

Kindly remind:

All network control board must configure with access power supply.
1 board for 1 power supply

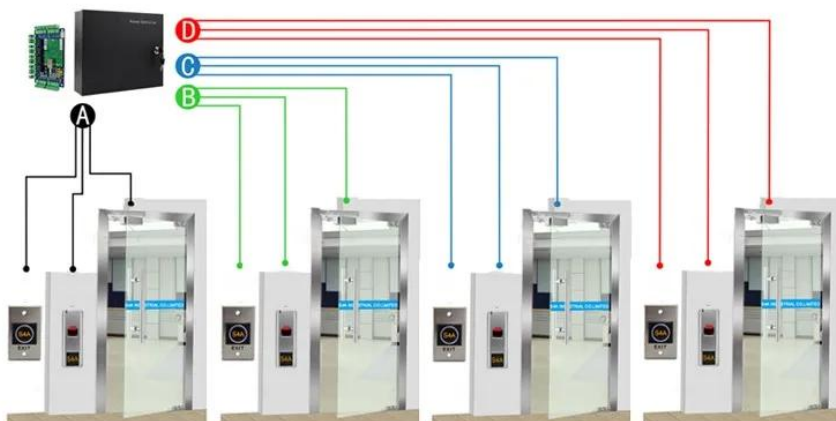

ACM-WEG04

Four doors 1 way: Control 4doors (Enter by Swipe cards and Exit by Push button)

Scope of Application



Port



School

□□□□□


[illegible]

□ □ □ □ □ □ □ □ □ □ □ □

2000 年 12 月 1 日起，凡在 2000 年 12 月 1 日前已注册登记的，其有效期为 2000 年 12 月 1 日至 2001 年 12 月 31 日。


3

20 “ ”

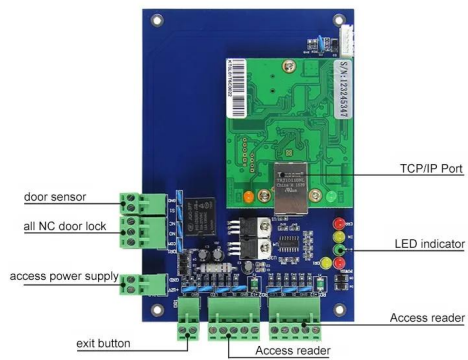


ACM-WEG01

000001000

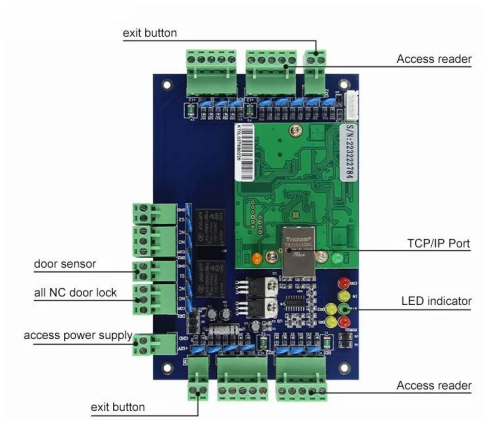

ACM-WEG02

□□□□2□□

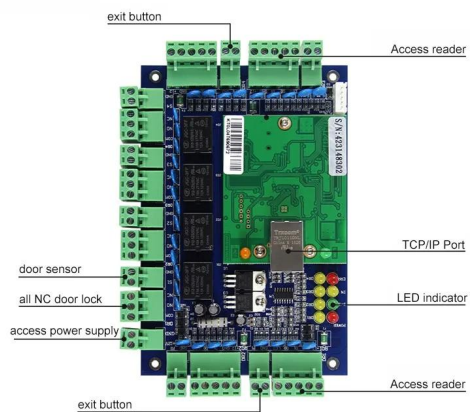

ACM-WEG04

□□□□4□□

You May Like



ACM-K2A/B

□ LED □□□□ Realese □□□□



ACM-Y280

□□□□□□□280kg/600lbs□



ACM-Y806-5A

□□□□5A



ACM225

RFID 12khz



ACM-210

RFID



ACM26X

125Khz EM RFID
115mm×75.5mm×16.8mm



ACM

RFID 20 RFID RFID RFID RFID RFID RFID RFID RFID RFID RFID

