



### □□□□QR□RFID□□□□

- 
- QR□
- 
- wiegand26□TCP / IP□RS485;
- LED□□□□□□□□
- SDK

- 
- 
- 
- 
- 
- + □
- 
- 
- 
-








□□□

- □Wiegand□□□□□□□□QR□RFID□□□□
- □□□□□□DC 4-15V□□□□□□
- □□□□□□□□□□
- □□□□□□□□□□
- □□□□□□□□□□0-20cm
- LED□□□□□□□□□□
- □□□□□□□□□□SDK

Terminal port								
Feature	VCC	GND	D0	D1	LED	BEEP	TX/R+	TX/R-
	DC 12	Negative	DATA0	DATA1	LED control	sound control	RS485+	RS485-

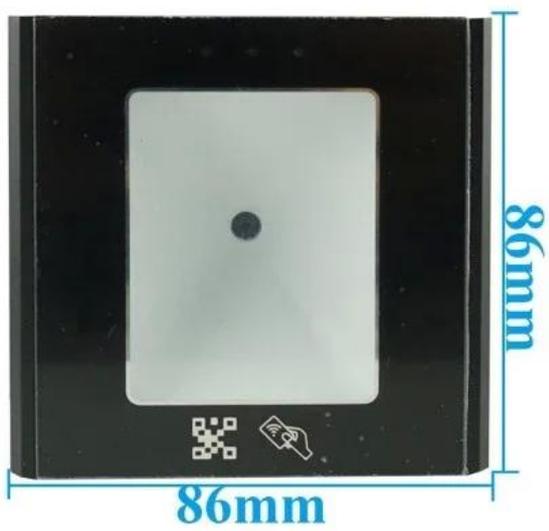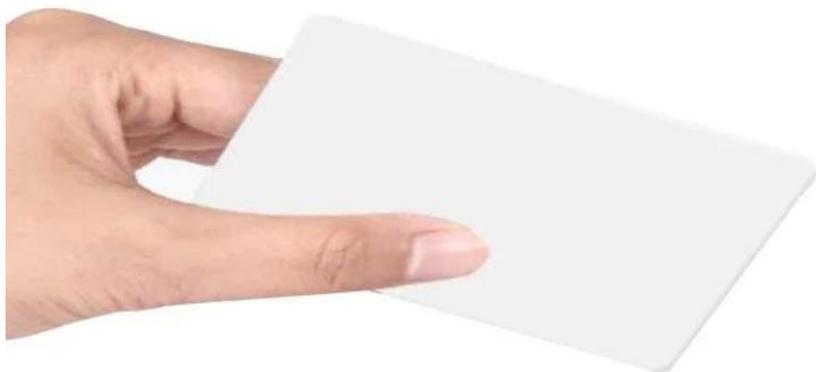

支持USB接口，支持Windows 2000 / XP / 2003 / Vista / 7/8，32/64位操作系统，支持SDK开发，支持多种语言。

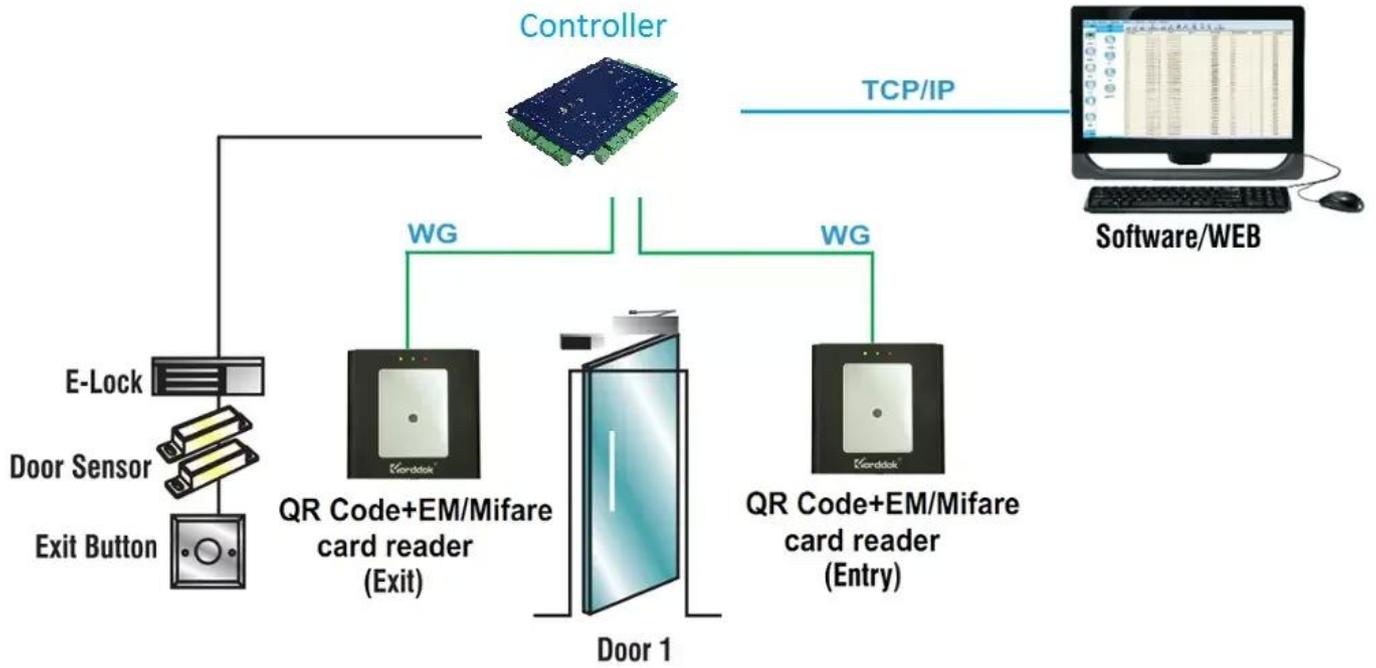

支持多种支付方式，支持多种语言，支持多种操作系统，支持多种接口。






ACM812A  
2-5m UHF  
Wiegand 26 RS232 / 485

ACM818A  
10-20m UHF  
Wiegand 26 RS232 / 485

ACM802A  
8-10m UHF  
Wiegand 26 RS232 / 485

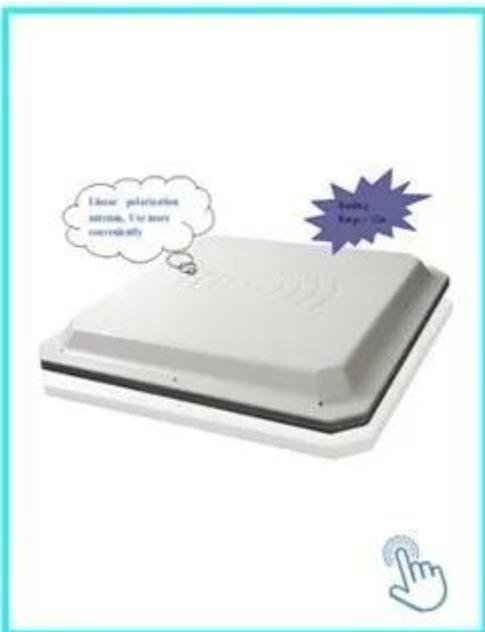



ACM801A  
10-15m UHF  
Wiegand 26 RS232 / 485

ACM 8017  
UHF  
UHF + WIFI + GRPS

ACM 918K  
UHF 4

