




Dimensions	86Lx86Wx20H(mm)
Standard Structure	Fireproof Material
Current Rating	3A,36VDC Max
Output Contact	NC\COM
Mechanical Life	1000000 tested
Suitable for Door	Hollow Door
Operating temp	-10°C~55°C(14°F-131°F)
Panel Material	Fireproof Material
Weight	0.15kg
Standard Packing	200pcs

Wiring Diagram



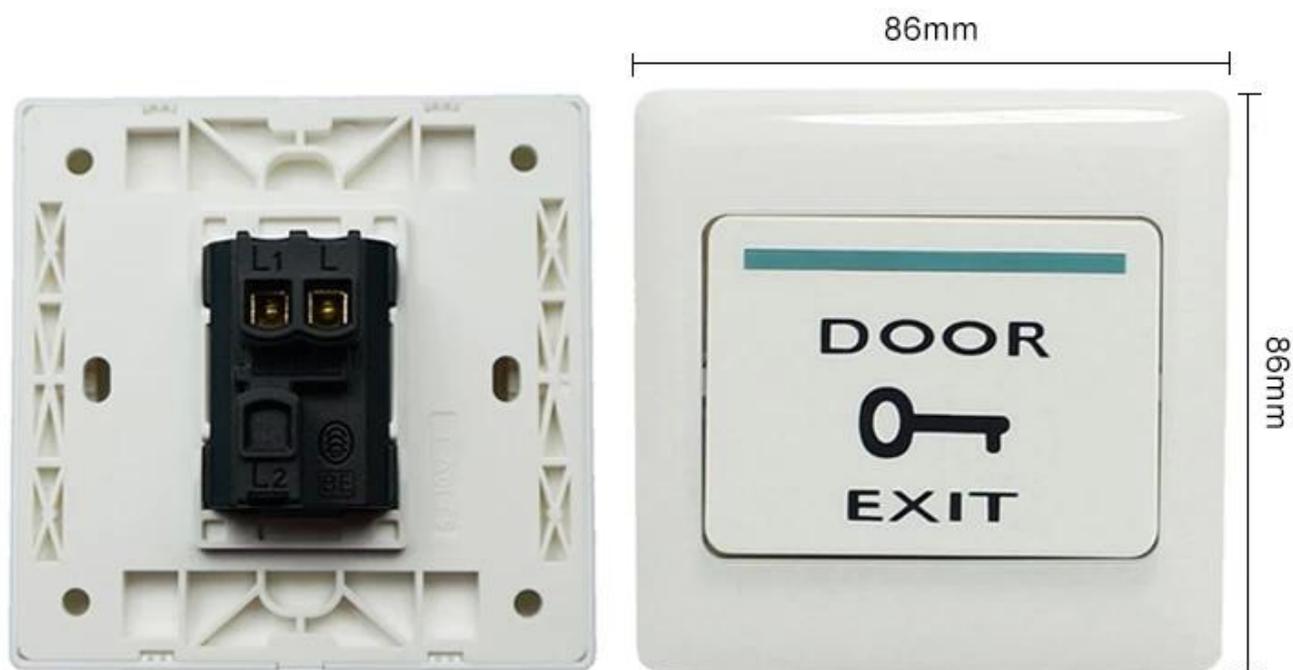

DOOR



EXIT



金橋GOLDBRIDGE

地址

深圳市宝安区西乡街道405区518031

电话+ 0086-755-83767678

0086-755-88391348

微信号

whatsapp / +

0086-13554918707

Skype lily-jiang1206

邮箱 sales@goldbridge sz.com

网站 http:// www goldbridge sz.com