



□□□□□□□□□□

.dimensions□92mm * 56mm

.output□□□□□/ nc / com

.Panel□□□□□□□

□“□□□”□□

□□□□□□□□□□□□

□
□
□
□
9
2
*
5
6
m
m
.
D
C
1
2
V
.

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100

□□□□□□□□□□

□□□□□□□□□□□□□□□□

·□□□□□

- ・IP-55 / SUS 304
- ・
- ・
- ・0.1~10
- ・
- .. 3A / AC120V / DC30V



Installation



Sensing Range



LED Indicator



A: Black / PC Lens

B: Round Shape LED Indicator

Power OFF




White
(Round Circle)

Power On / Standby




Blue LED Indicator ON
(Round Circle)

Power On / Beam Broken

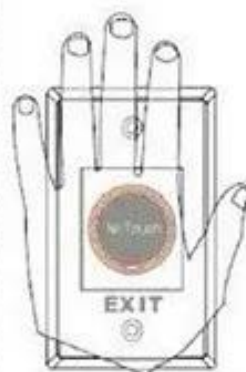

Red LED Indicator ON
(Round Circle)

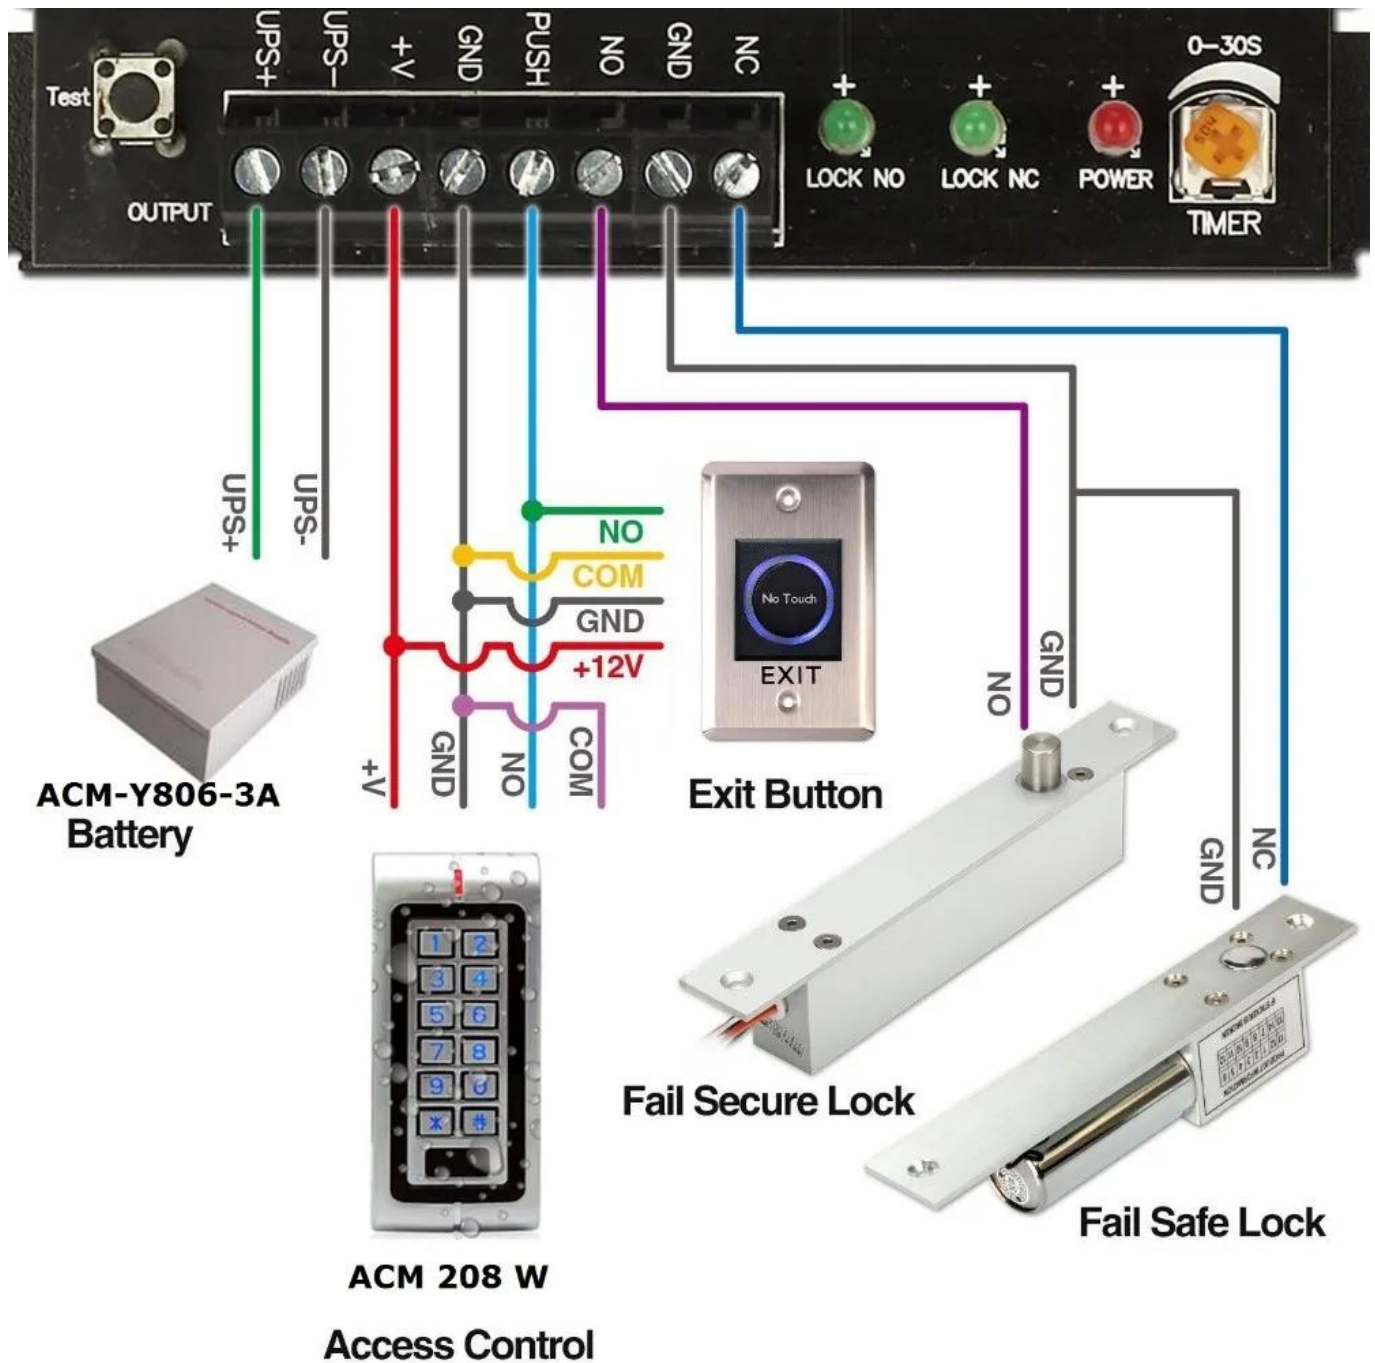

0.3kg
 10cm x 10cm x 8cm





K2B 86 * 86mm

□□□□□□□□□□□□

K9A 115 * 40□□

□□□□□□□□□□ NO / NC □ K5B 86 *
86mm





1. 86 * 86mm K4B
 2. 86 * 86mm K14B
 3. 86 * 86mm K815B

1.

1. 24
- 2.
3. OEM / ODM
- 4.
- 5.
- 1.
- 2.
3. 2 - 3
6. 1 5 7 30
7. T / T PayPal
8. DHL FedEx TNT UPS EMS

1.

1.

2.

3

4

3000 3-7 7-15 100,000

5

OEM

6

RFID/ NFC/ RFID/ RFID RFID 20