



DC 12V ☐ ☐ ☐ ☐ ☐

5A□□□□

□ □ □ □ □ □ □ □ □ □ □ □ □ □ □ □

□ □

□ □ □ □ ① ② V 3 A □ □ □ □ □ □ □ □ □ □

8
9
0
5
x
2
7
m
m
A
C
D
V
-
2
4
V
D
D
W
D
D
D
C
D
V
;
/
n
c
.
D
D
S
.

□□□□□

Dimensions(mm)



► L85 x W65 x D27mm

Size: L88 x W71 x D29mm ◀

Weight: 0.14kg ◀



Access Control Switch Power Supply

The power supply is applied to access control devices and building intercom device and also for video access control.




Metal shell

Safety | Anti-fall | Fire prevention



Delay adjustment


Built-in time delay circuit that can set unlock time, set exit button input that can control unlock electric lock.



Smart circuit board

Using high-quality circuit boards



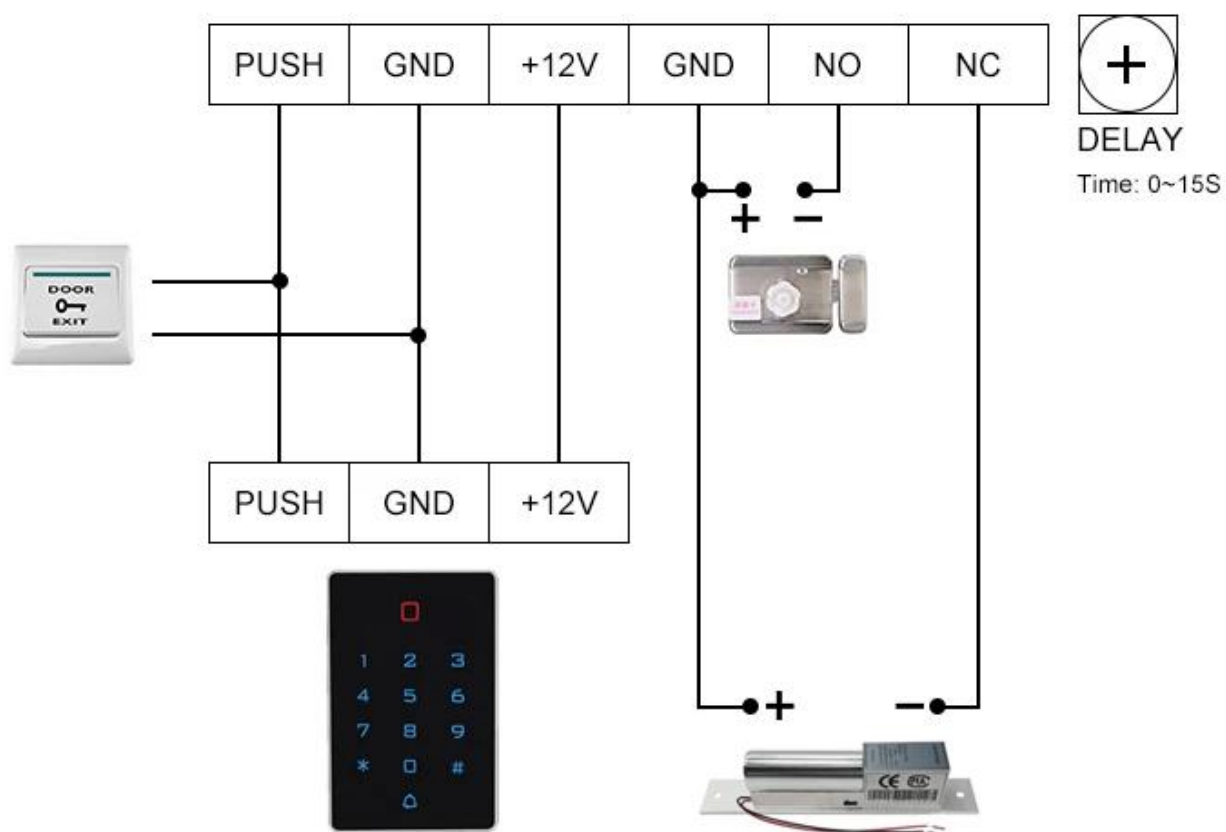

Scope of Application



Company



Hospital



Hotels



Logistics



Port



Financial



Government



Factory



Aviation



School



ups

DHL
WORLDWIDE EXPRESS®


aramex
delivery unlimited

EXW


FCA FOB

CIF CFR

2000 RFID
/
CO FTA F
E ...
EXW FOB FCT CIF CFR ...

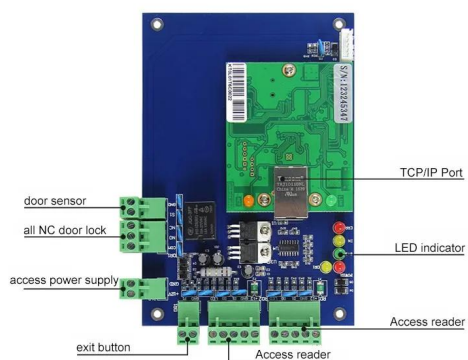


□□□□1□□

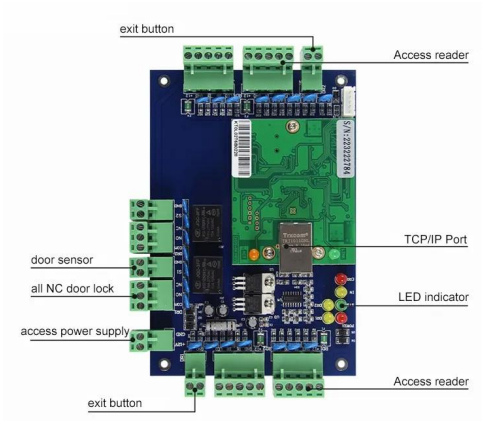

ACM-WEG02

□□□□□2□□

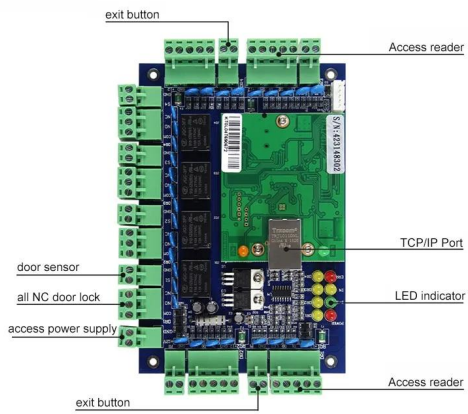

ACM-WEG04

□□□□□4□□

You May Like



ACM-K2A / B.

□□□LED□□□□Realese□□□□



ACM-Y280

280kg / 600mm



ACM-Y806-5A

5A



ACM225

RFID 12kHz



ACM-210

RFID Wiegand



ACM26x.

125KHz EM RFID

115mm×75.5mm×16.8mm

RFID

ACM Goldbridge

RFID 20 RFID RFID RFID RFID RFID RFID RFID

