


Pinout


13.56MHz Specifications

Item	Specification
Frequency	13.56MHz
Standard	ISO / IEC 14443 TypeA
Chip	MF S50/S70/Ultralight/F08
Supply Voltage	VCC + 3.3V
Power Consumption	100mW
Interface	TTL
Bit Rate	9600bps~115200bps
Transfer Rate	106Kbit /s
Distance	0mm-100mm (depends on environment)
Operating Temperature	-20°C ~ + 80°C
Storage Temperature	0°C ~ + 95°C
Dimensions	39mm* 19mm* 0.8mm
Weight	75mg* 55mg* 1mm
Capacity	10G

Dimensions

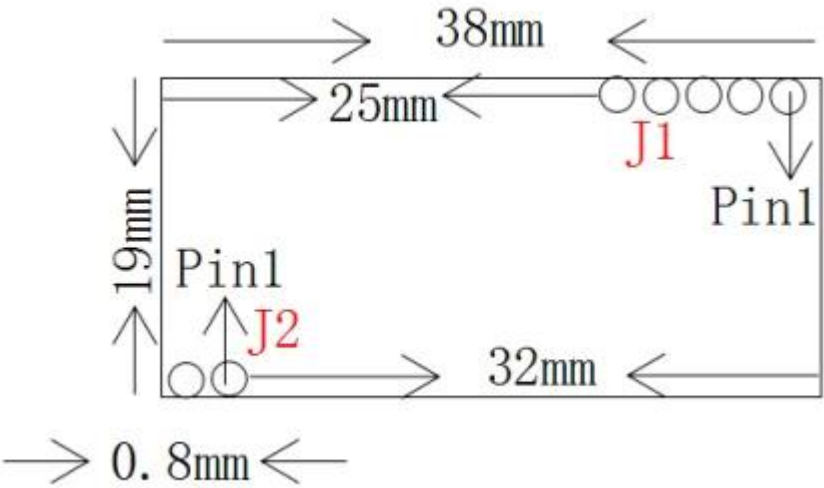

Pin	Signal	Description
J1	Pin1	NC
J1	Pin2	UART RXD
J1	Pin3	UART TXD
J1	Pin4	GND
J1	Pin5	VCC
J2	Pin1	Pin1
J2	Pin2	Pin2

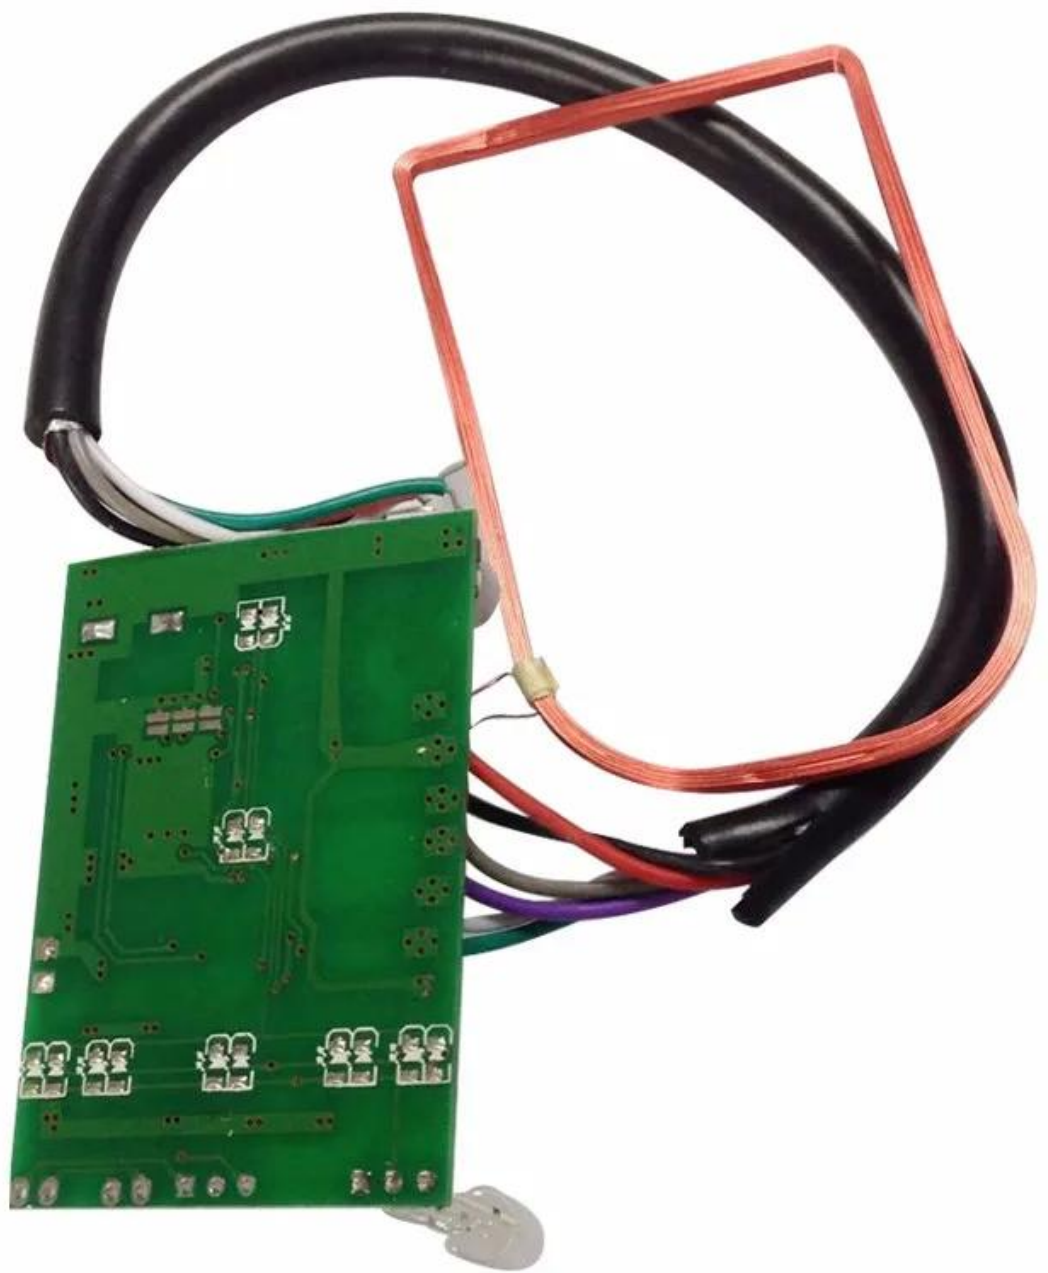



Be applied to



access control system



Multi controller



attendance machine

Shipping





ACM26X RFID

125Khz wiegand 26/34
115mm×75.5mm×16.8mm

ACM26G RFID

125Khz /13.56Mhz
26/34 / RS232

KR600E RFID

125KHz ID / 13.56Mhz 26
115mm×75.5mm×16.8mm



