



12V
12V
12V

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10
- 11
- 12
- 13
- 14
- 15
- 16
- 17
- 18
- 19
- 20
- 21
- 22
- 23
- 24
- 25
- 26
- 27
- 28
- 29
- 30
- 31
- 32
- 33
- 34
- 35
- 36
- 37
- 38
- 39
- 40
- 41
- 42
- 43
- 44
- 45
- 46
- 47
- 48
- 49
- 50
- 51
- 52
- 53
- 54
- 55
- 56
- 57
- 58
- 59
- 60
- 61
- 62
- 63
- 64
- 65
- 66
- 67
- 68
- 69
- 70
- 71
- 72
- 73
- 74
- 75
- 76
- 77
- 78
- 79
- 80
- 81
- 82
- 83
- 84
- 85
- 86
- 87
- 88
- 89
- 90
- 91
- 92
- 93
- 94
- 95
- 96
- 97
- 98
- 99
- 100

1. 1. 2. 3. 4. 5. 6. 7. 8.
 2. 3. 4. 5. 6. 7. 8.
 3. 4. 5. 6. 7. 8.
 4. 5. 6. 7. 8.
 5. 6. 7. 8.
 6. 7. 8.
 7. 8.
 8. CE Rosh CMA
- OEM / ODM



Part 2.

HOOK LATCH & BALL LATCH

Solid brass hook latch or ball latch are optional. It could meet more requirements.



Hook latch with pick-proof and anti-fake lock design.



Part 3.

OPTIONAL CYLINDER HOLE

Round cylinder hole or long cylinder hole to optional, Suitable for more environments.



Double Cylinder Lock

Part 4.

SINGLE OR DOUBLE CYLINDER

Single cylinder or double cylinder are available, high strength material solid brass cylinder and deadbolt.



Single Cylinder lock

Part 5.

FREE LOCK FUNCTION

The button on the lock (fitted on certain models) can be blocked by the key, leaving the door/gate always open.

With building visual intercom, access control system and other ancillary uses.



Right open




Left open

Part 6.

REVERSIBLE DEADBOLT

Original brass deadbolt. Real universal for right, left, inward, outward opening. No need to buy separately.



Way to change deadbolt direction




Factory default is inward opening. Push the bar of deadbolt and turn 180 degree to make it for outward opening.



Internal Structure

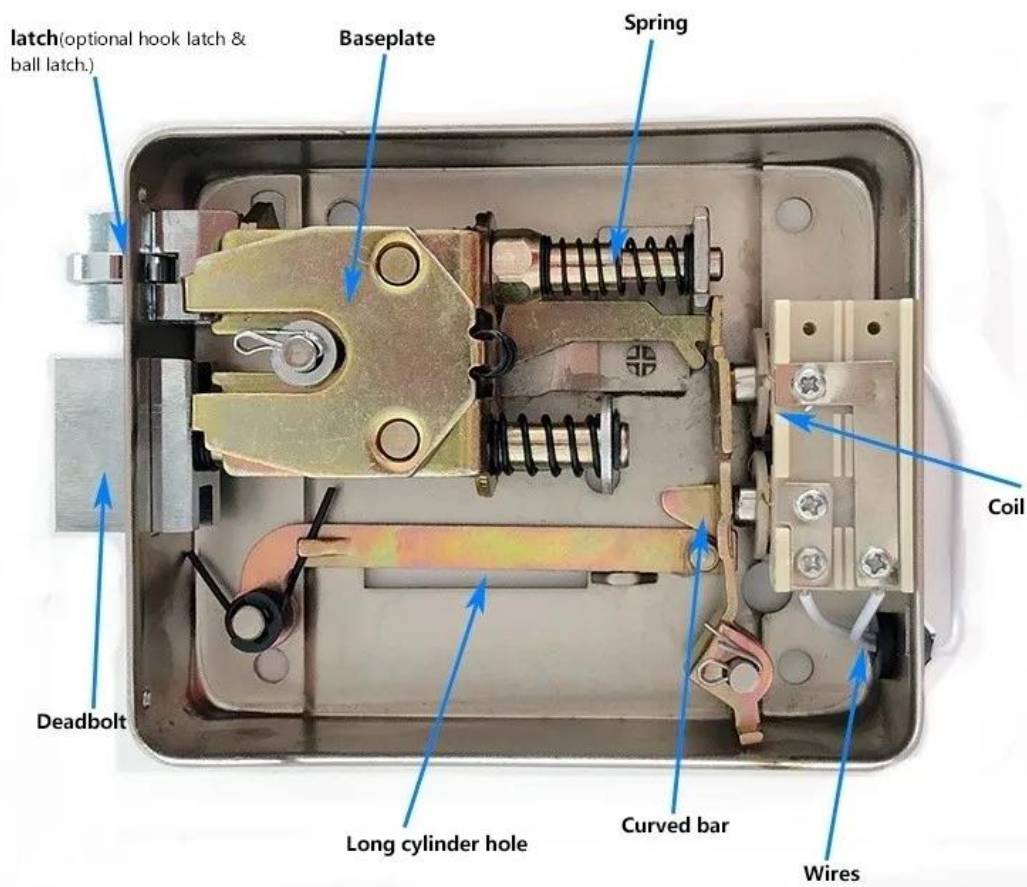
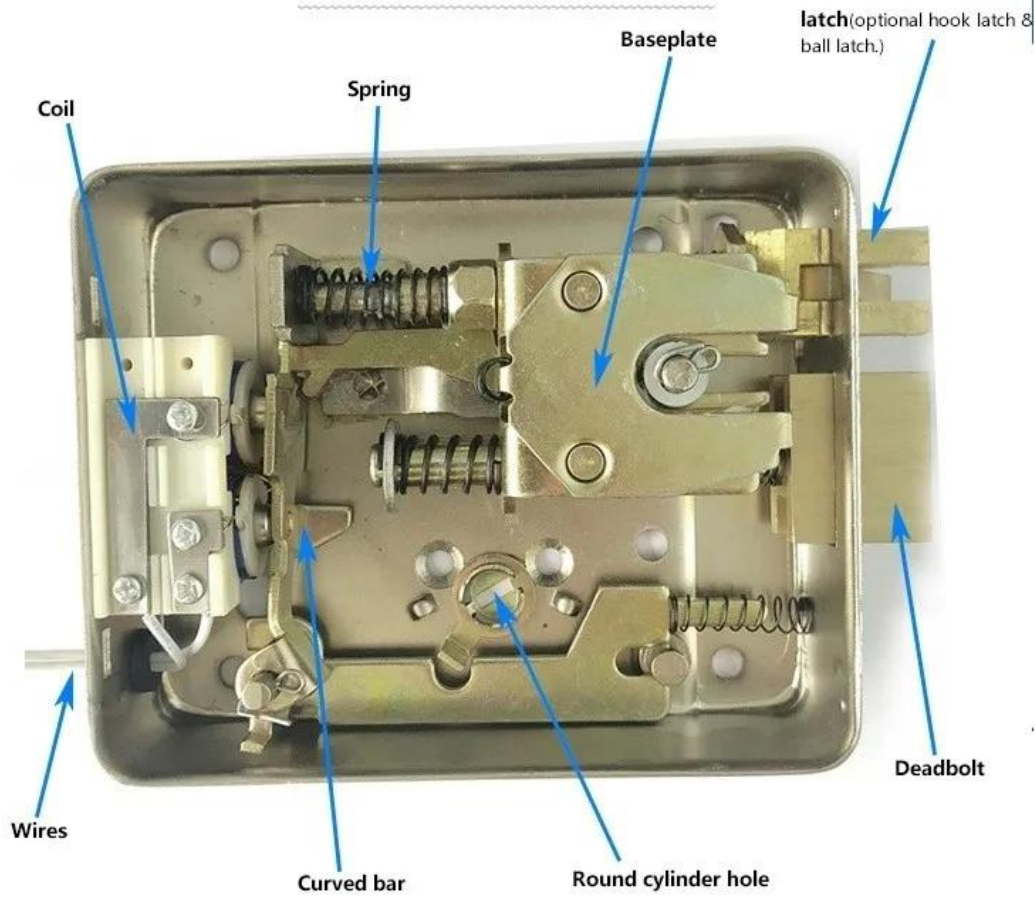


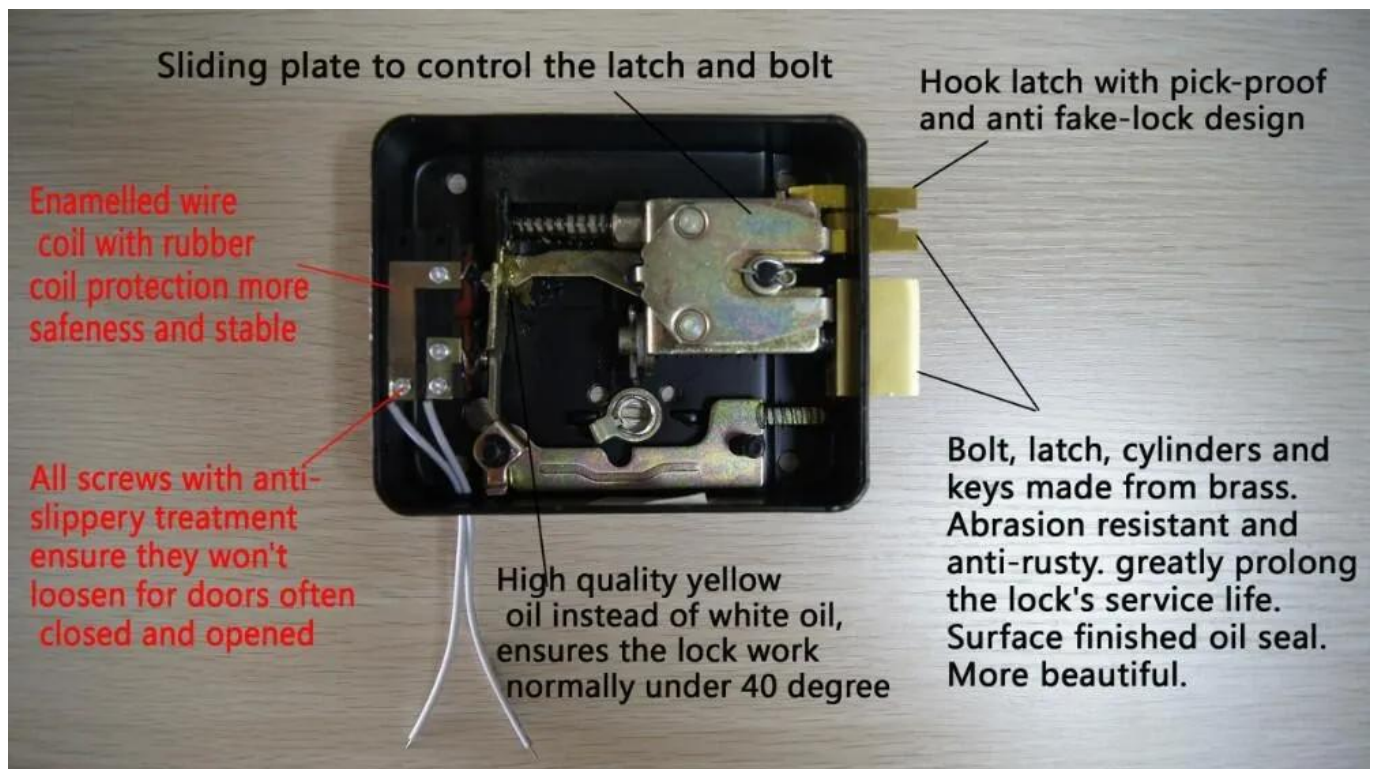



- 2000 ACM Goldbridge 2000
- 2000 ACM Goldbridge 2000
- 2000 ACM Goldbridge 2000



Electric control locks all kinds installation schematic diagram

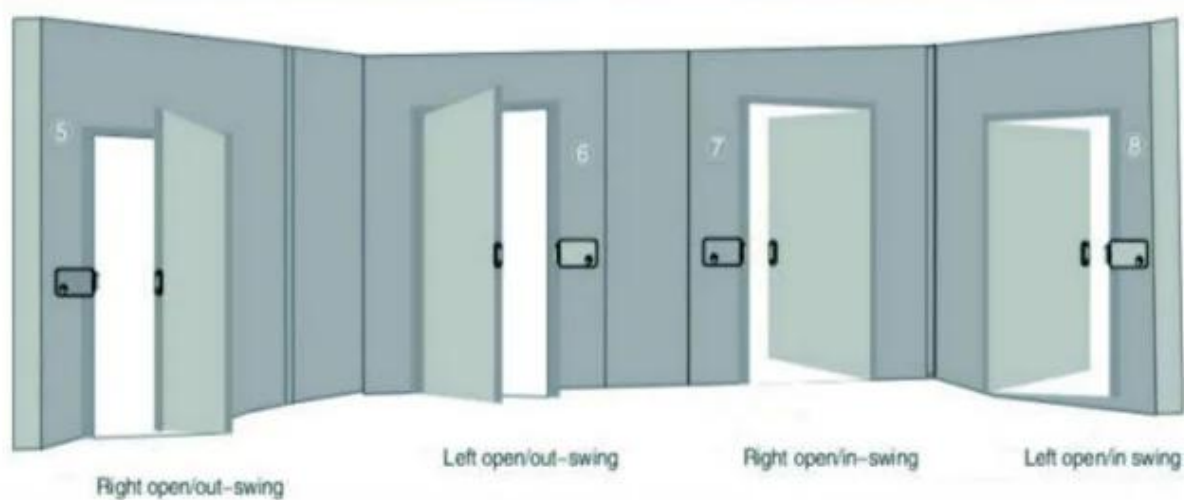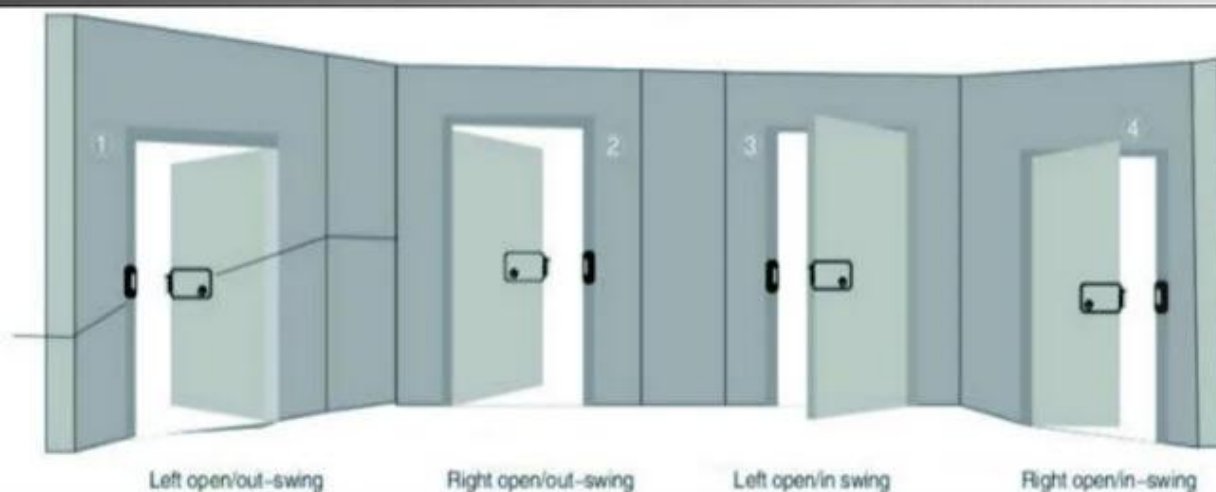


Installation Chart

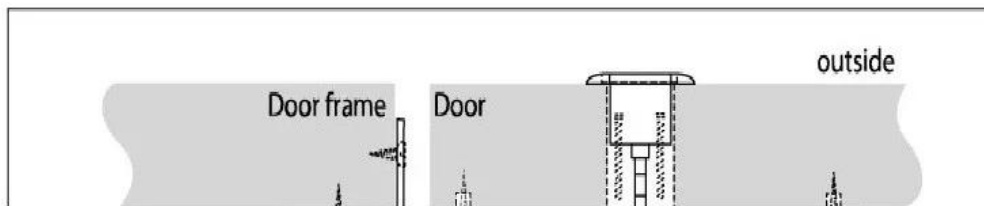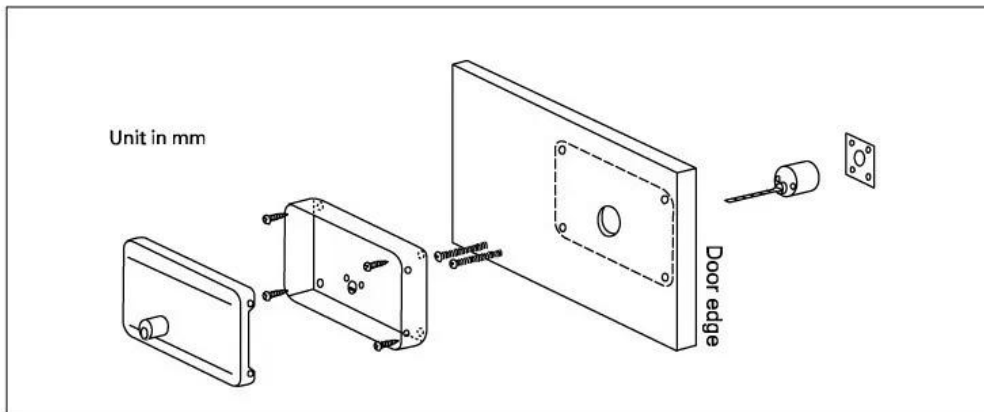

COPPER WIRE SECTION RELATED TO SUPPLY DISTANCE


anode bracket.




Installation the anode bracket

Anode bracket can be installed with either one of these method or both depending on the door's condition



Method 1 :

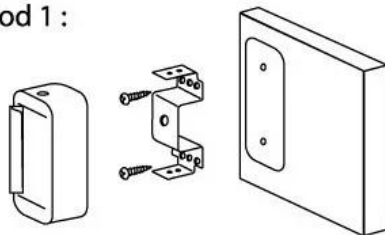

Method 2 :




mm ²	Ømm
0.5	0.8
1	1.2
1.5	1.4
2	1.6

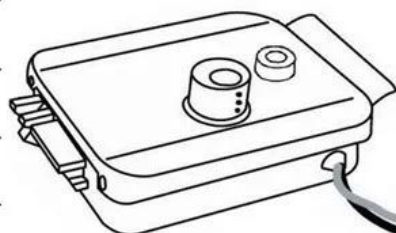

□□□□

□□□□
□□□DHL□FEDEX□TNT□UPS□EMS□SEA□Air□□□□□□□□□□□□□□
□□□□□□□□□□□□

□□
□□□□□□□□1□□□□10□□
□□□□□26 * 26 * 10cm□□□□46kg□□□□50□□□

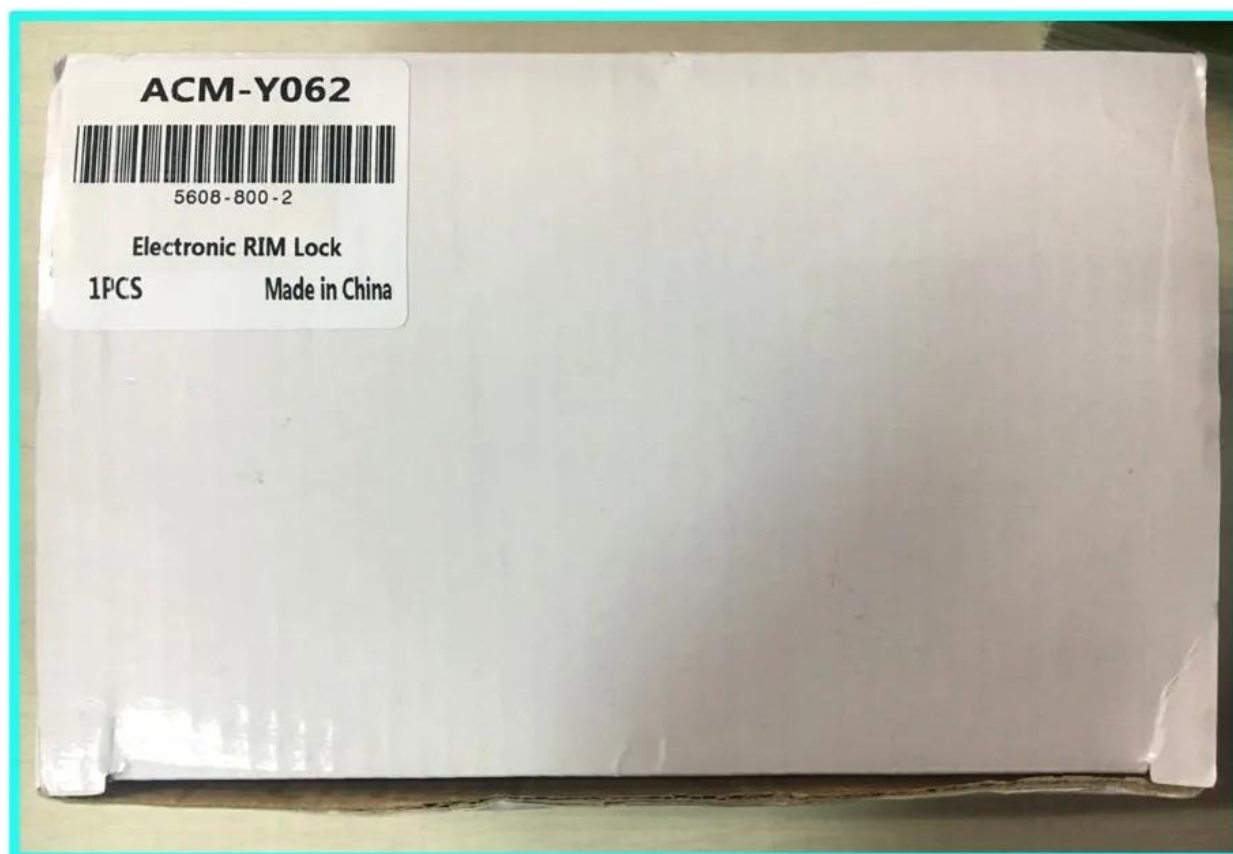



ACM-Y090

□□□□□□□□
□□□□125x98x36mm

ACM-Y091

□□□□□□□□
□□□□125x98x36mm

ACM-Y066

□□□□□□□□
□□□□130x98x41mm



ACM-Y062

□□□□□□□□
□□□□130x98x41mm

ACM-Y043

□□□□□□□□
□□□□126x101x39mm

ACM-Y044

□□□□□□□□
□□□□126x101x39mm



ACM-Y034

□□□□
 □□□□148×107×35 mm

ACM-Y037

□□□□
 □□□□125×98×36 mm

ACM-Y048

□□□□

□□□□140×116×55 mm

You may need



ACM-Y100S

□□□□□5PIN□□□□□□□□□□□□□□

ACM-Y130

□□□□NC / NOOptional□

□□□□110x28x31mm

ACM-Y280

180kg / 350lbs

5/5/2020

- 1 24
2
3 OEM / ODM
4 &
5
1
2
3 2 - 3
6 1~5 7~30
7 T / T Western Union Paypal
8 DHL FEDEX TNT UPS EMS SEA Air

11

1

[illegible]

2

T / T Paypal
DHL FedEx TNT UPS

3

□ □

4

3-9 5000pcs 7-15 100,000pcs

□□5□□□□□□□□□□

OEM

6

RFID/ NFC/ RFID/ RFIDrfid20