RFID

DC12-24V

WG26/34

78.7 *78.7 *18.6 6N/3430 EM 0-904 NP KEM/13.56mhz

5-7cm [illegible] / [illegible] / [illegible] / [illegible] / [illegible] PIN [illegible] + PIN .5KG [illegible]

[illegible]

1[illegible]
[illegible]
2.[illegible]26[illegible]
3.[illegible]
4.[illegible]0.1[illegible]
5.[illegible]3000[illegible]
6[illegible]

□□□□

ACM-A89□□□□RFID□□ □□□3000□□□□□□□□□LED□□□

Welcome To Goldbridge Ltd

□□□□□□□□□□□□□□□□□□ OEM / ODM□□

□□□□

□□Wiegand 26/34□□□□□□□□□□□□□□□□□□

Wiring diagram

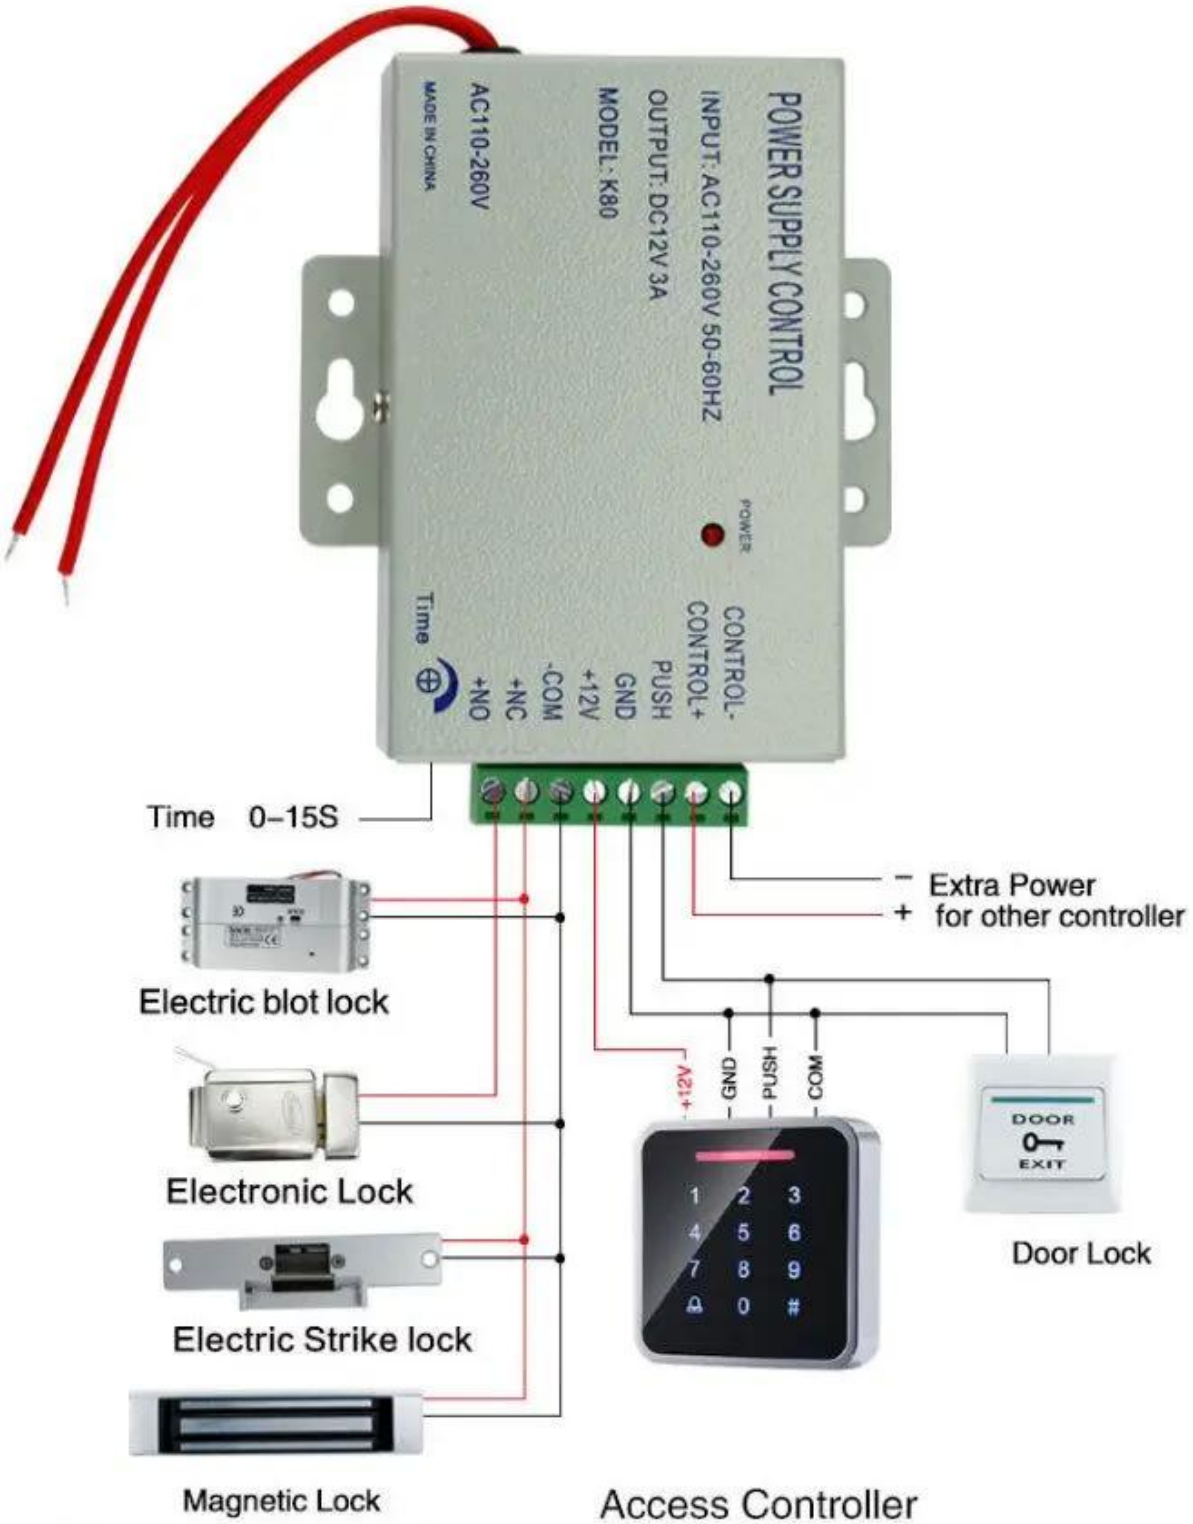

Attention when electronically contrlled lock must be transferred to 0seconds delay,to prevent burning of electric lock.

□□□□□

1□□□□□□□24□□□□□
2□□□□□□□□□□□□□□□□□□□□□□□□
3□OEM / ODM□□
4□□□□□fashin□□□□□□□□□□□□□□□□
5□□□□□□
1□□□□□□□□□□□□□□□□□□
2□□□□□□□□□□□□□□
3□□□□□□□□□□□□□□□□□□□□□□2-3□□□
6□□□□□□ □□□□□□1□5□□□□□□□□7□30□
7□□□□□□ □□□□□□□□□□□□□□T / T□Western Union□Paypal□Ali□□□□
8□□□□ □□□DHL□FEDEX□TNT□UPS□EMS□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□

□□□□

□□ACM□□□□Goldbridge
□□□□RFID□□□□□□□□□□□□□□□□□□□□□20□□□□□□RFID□□□□□□□□□□□□□□□□□□□□□□□□□□□□RFID□□RFID□□
□□RFID□□□RFID□□□□□RFID□□□□□□□□□□□□□□□□□□□□□