




□□□□□□LED□□□□□□□□NO / NC / COM

□
□
□
3
□
3
6
v
d
c
m
a
x
A
0
m
A
□
□
□
m
.
□
3
□
□
□
6
°
C
□
□
N
C
.
8
0
*
8
6
m
m
/
1
1
5
*
7
m
m

PRODUCT CHARACTERISTICS



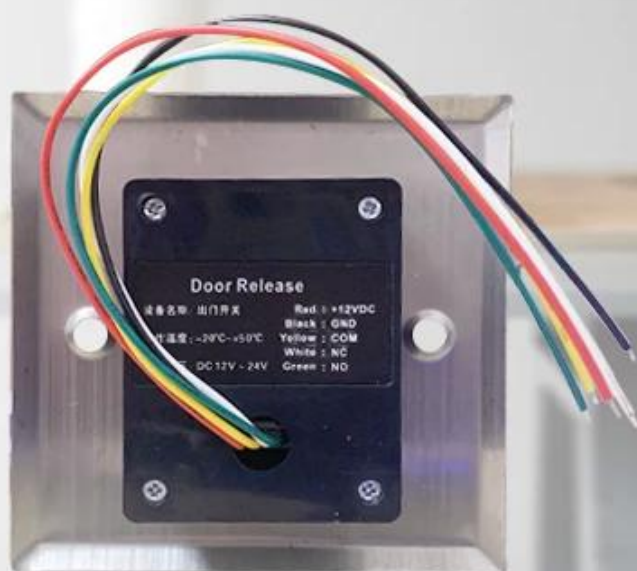


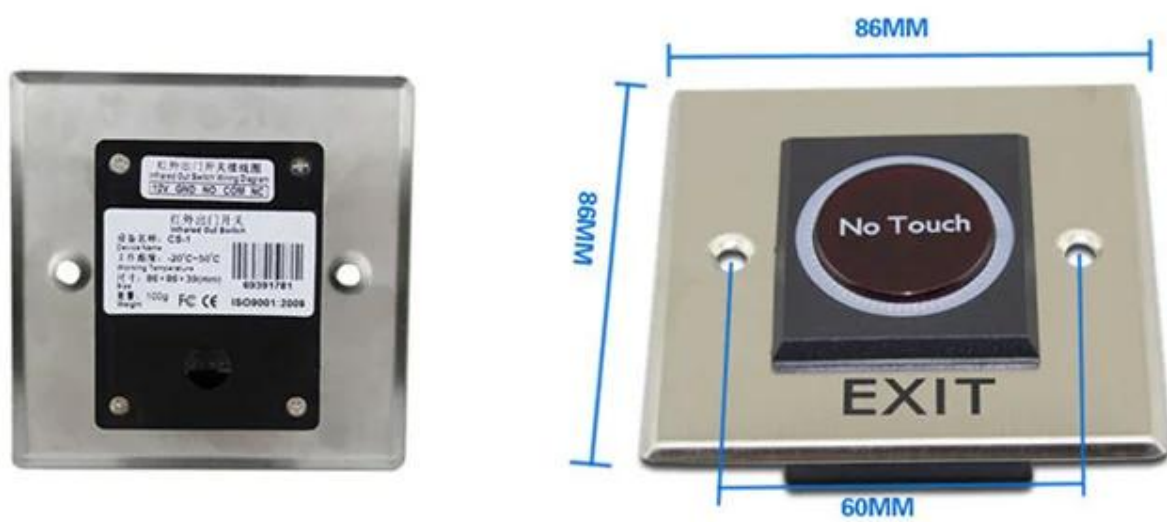
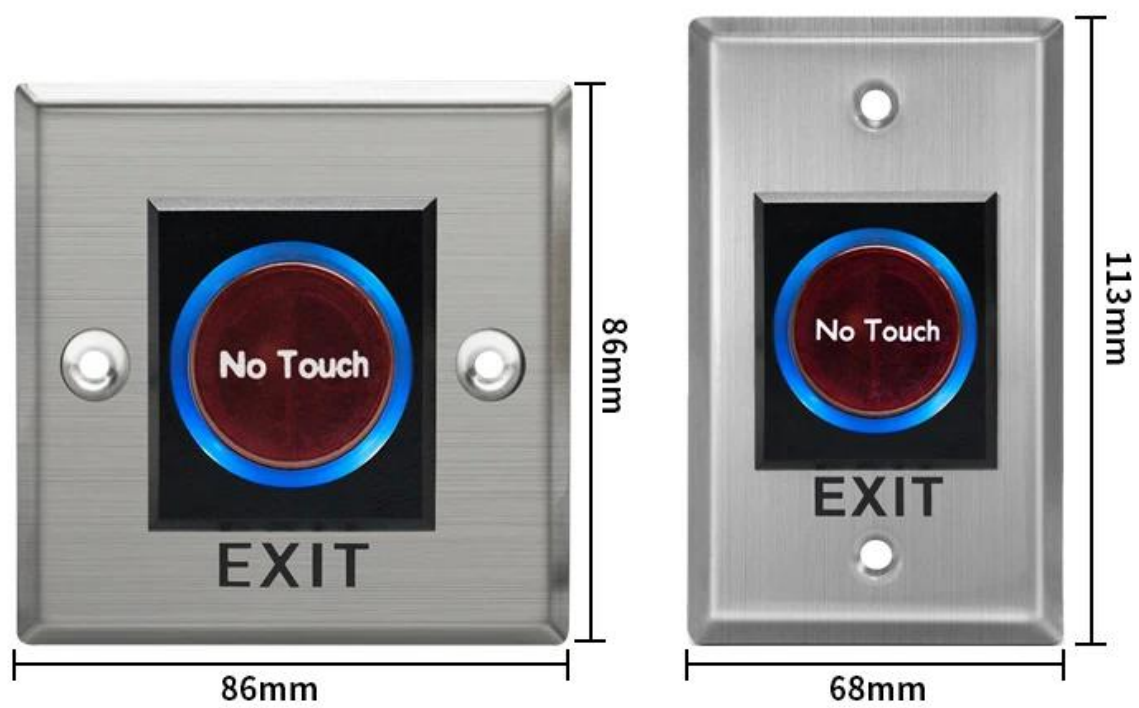




Infrared induction switch



Product Dimensions

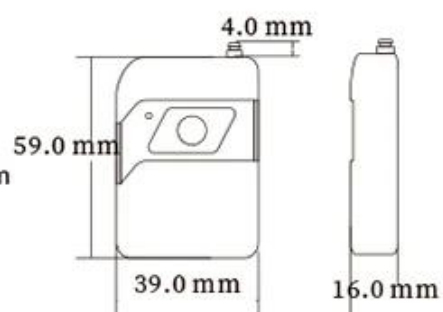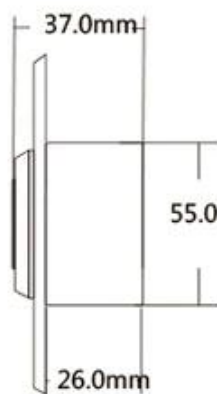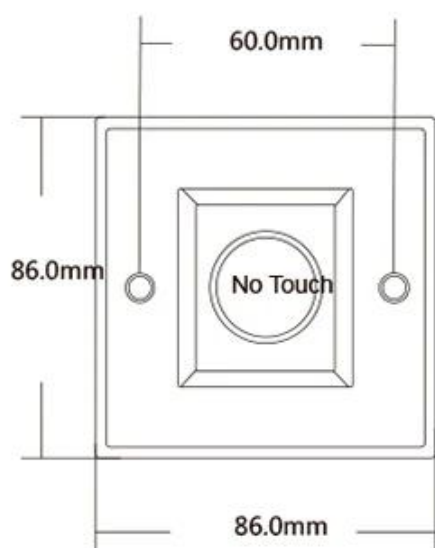





K2B 86 * 86mm

□□□□□□□□□□□□

K9A 115 * 40□□

□□□□□□□□□□ NO / NC □ K5B 86 *
86mm





□□□□□□□□□□□□K4B□86 * 86mm
 □□□□kirsite□□□□□□ K14B□86 * 86mm
 □□□□□□□□□□; K815B□86 * 86mm

1. 24 小時服務熱線
2. 專業技術支持團隊
3. OEM / ODM 服務
4. 全球物流網絡
5. 品質保證
1. 專業技術支持團隊
2. 全球物流網絡
3. 2 - 3 天交貨
6. 1 至 5 年保用，7x24 小時服務
7. 支持 T / T, PayPal 等付款方式
8. 支持 DHL, FedEx, TNT, UPS, EMS 等物流方式

4/4

1

[illegible]

2. 問題の提起

- T / T PayPal
DHL FedEx TNT UPS

3. 数据源

□ □ □ □ □ □ □ □ □ □ □ □ □ □ □ □ □ □ □ □

4

□□□□□□□□□□3000□3-7□□7-15□□100,000□

0050000000000000

[illegible]

6. 参考文献

RFID/ NFC/ RFID/ RFIDRFID20