

Contactless Card Reader

Response speed ≤ 0.2 seconds, Card reading distance can be 0-80mm

Sensitive, Support ID card reading or IC card (Optional)



QR Code Recognition


Automatic induction, LED fill light, can be recognized even in dim environment, repaid response and high accuracy



Zinc Alloy Outer Frame+Acrylic Panel


Using zinc alloy outer frame, strong and durable, longer service life

Acrylic panel, beautiful and generous, full of sense of technology

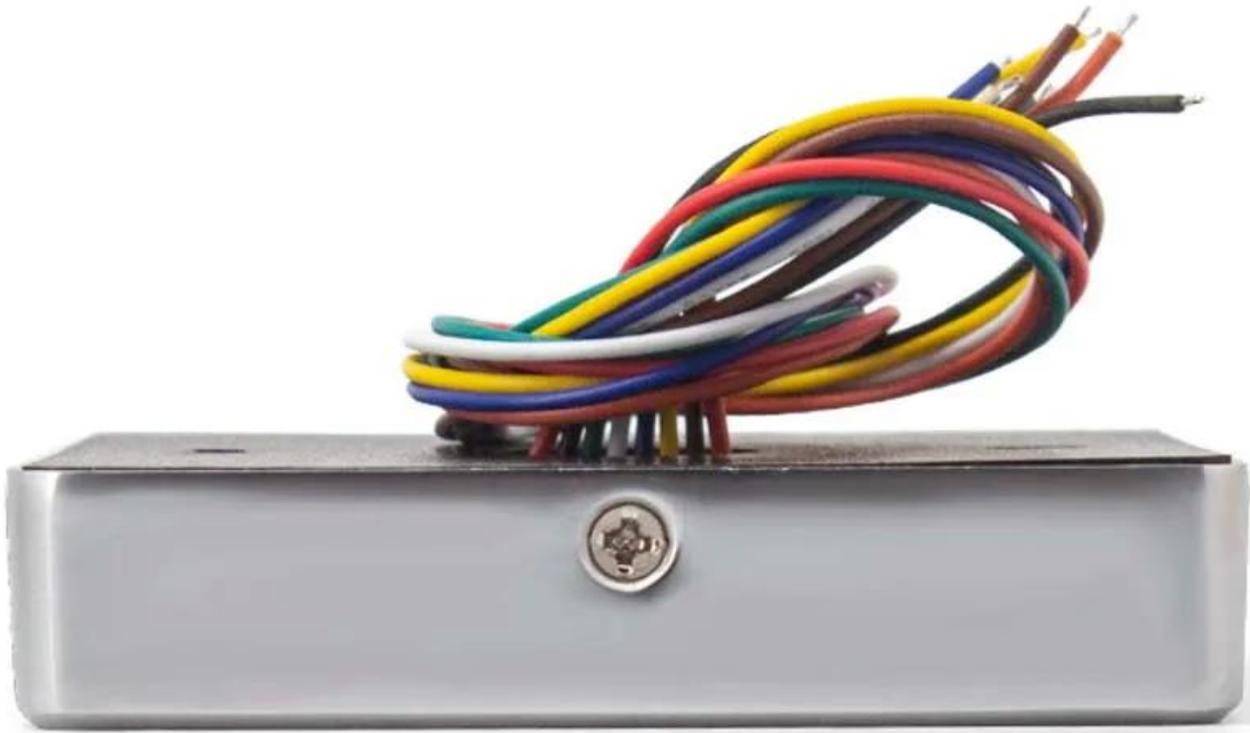

Multiple Interfaces Option:


Support Wiegand26/34, RS232, RS485, TTL. Meet various needs

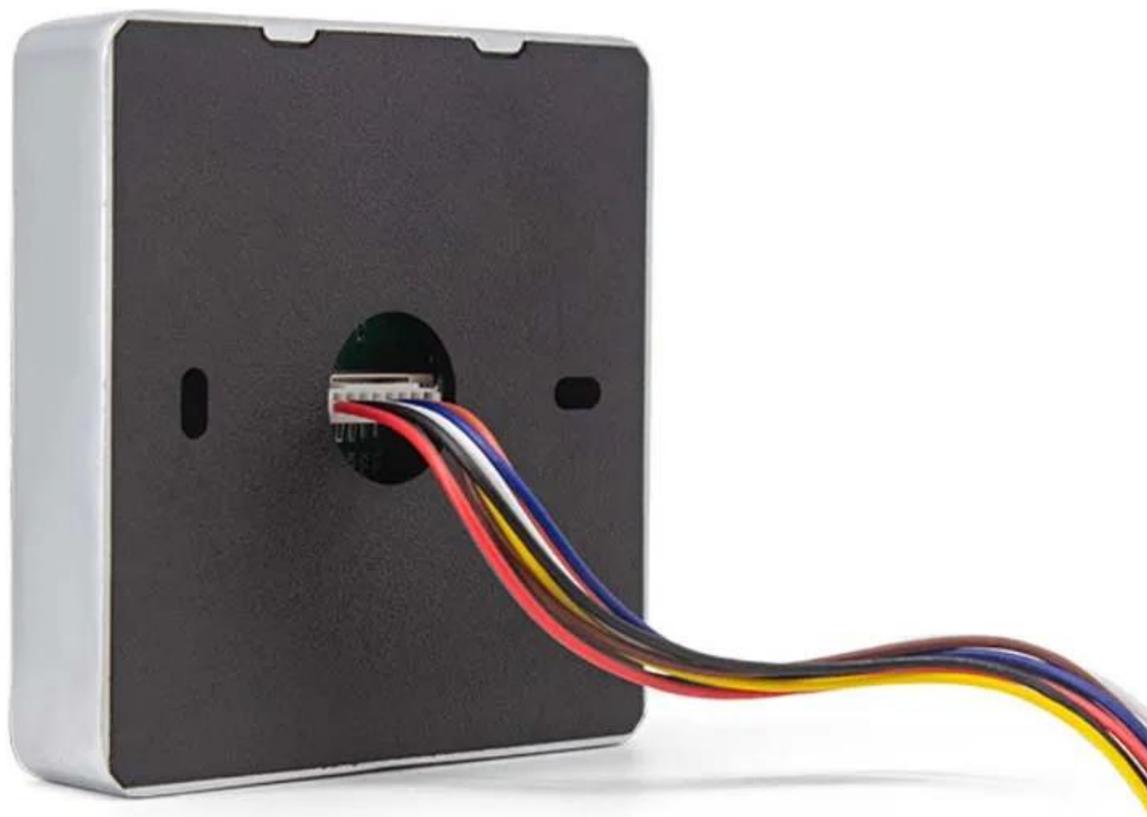

□
□
□
□
R
48
2
8
3
□
□
1
2
V

□
□ □ G
N
D □
□ □
D
5
A
Q
□ □ D
X
n
g
□ e
4
8
5
B



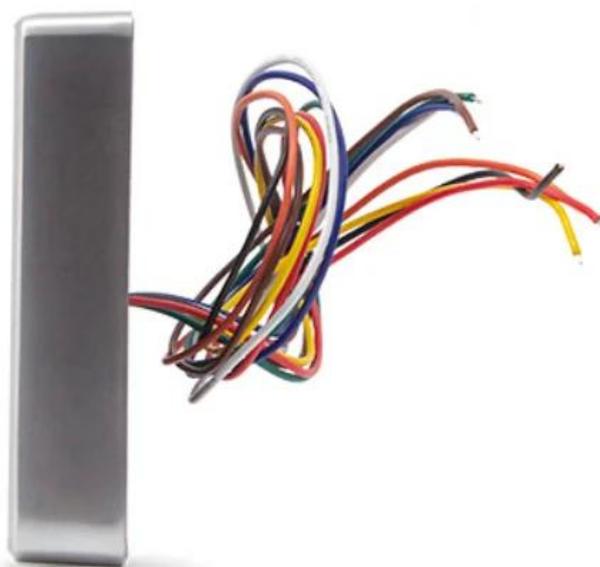




ACM812A
2-5m UHF
26 RS232 / 485

ACM818A
10-20m UHF
26 RS232 / 485

ACM802A
8-10m UHF
26 RS232 / 485

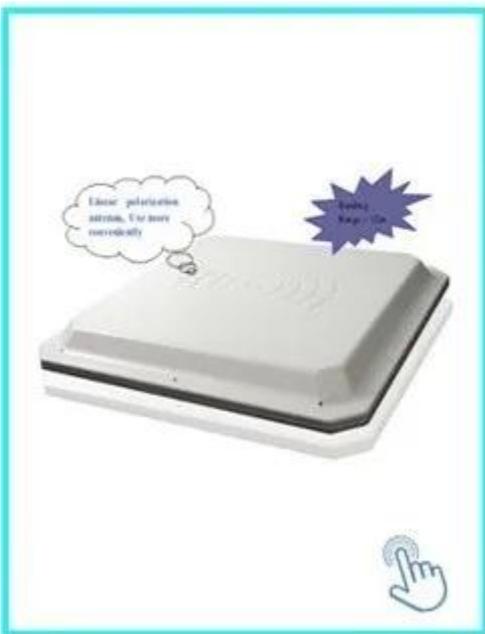



ACM801A
10-15m UHF
26 RS232 / 485

ACM 8017
UHF
+ WIFI + GRPS

ACM 918K
UHF 4

