

POWER SUPPLY CONTROL

INPUT: AC 110-240V 50-60HZ

OUTPUT: DC 12V 3A ☐

DC 12V 5A ☐

CAUTION

INDOOR USE ONLY

THE FOLLOWING TWO CONDITIONS

- 1.THIS DEVICE MAY NOT CAUSE HARMFUL INTERFERENCE
- 2.THIS DEVICE MUST ACCEPT ANY INTERFERENCE RECEIVED

OUTPUT: DC 12V 3A ☐

DC 12V 5A ☐

INDOOR USE ONLY

THE FOLLOWING TWO CONDITIONS


1. THIS DEVICE MAY NOT CAUSE HARMFUL INTERFERENCE
2. THIS DEVICE MUST ACCEPT ANY INTERFERENCE RECEIVED

2. THIS DEVICE MUST ACCEPT ANY INTERFERENCE RECEIVED

2

2
1
2
*
1
7
2
*
7
m
m
A
C
1
1
V
-
2
4
V
1
1
5
W
1
1
D
C
1
2
V
;
/
n
c
.
1
1
5
S
.

□□□□

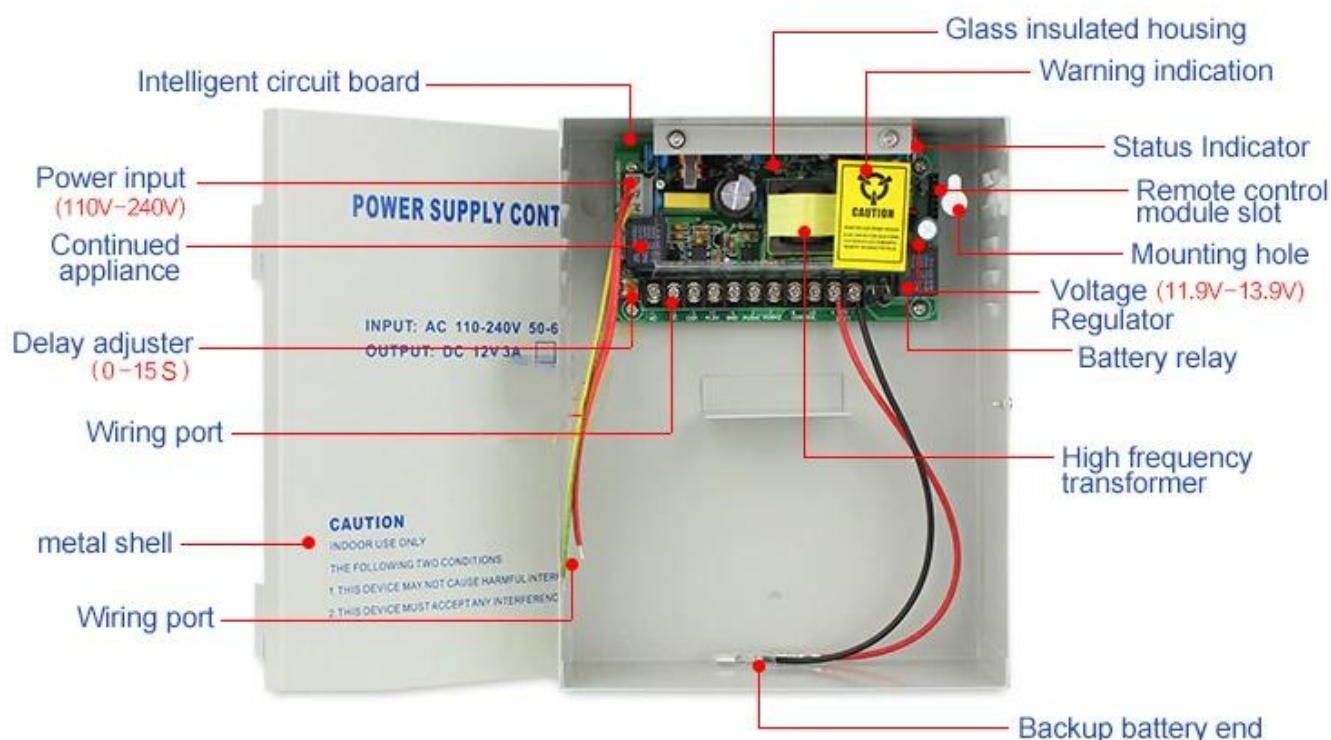


External terminal



External wiring port for easy wiring, easy to use, save installation time

Remote control module slot

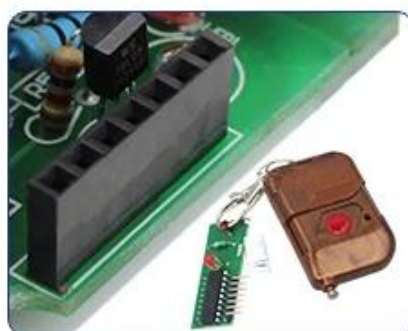

The access control power board slot design can insert the remote control module into the slot and unlock it with one button.

For strong current



Ordinary access control power supply provides 1.5-1.8A current output, 208K 5A access control power supply provides 5A current output



◀ L212x W165 xD70mm

L217x W173 xD76mm ▶
Weight: 1.02kg



ups

DHL
WORLDWIDE EXPRESS®

aramex
delivery unlimited

EXW


FCA FOB

CIF CFR


2000RFID
/COFTA
E ...
EXWFOBFCTCIFCFR ...
...

2019年12月20日，中国银保监会发布《关于规范商业银行互联网贷款业务的通知》，规定“商业银行不得通过互联网渠道发放信用贷款”。

1111

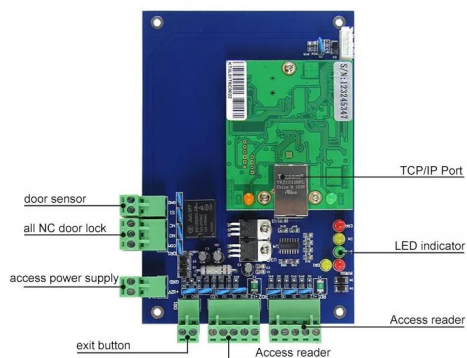


□□□□1□□

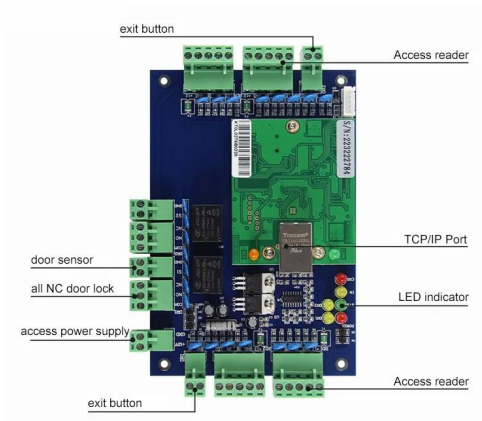

ACM-WEG02

□□□□□2□□

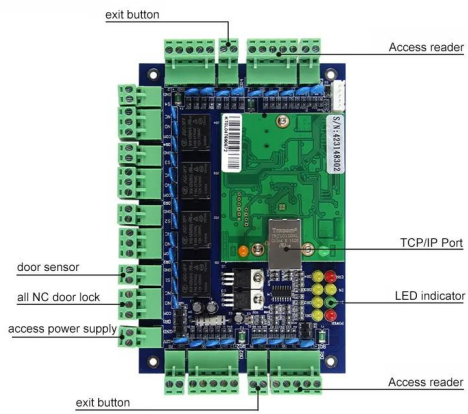

ACM-WEG04

□□□□□4□□

You May Like



ACM-K2A / B.

□□□LED□□□□Realese□□□□



ACM-Y280

280kg / 600mm



ACM-Y806-5A

5A



ACM225

RFID 12kHz



ACM-210

RFID Wiegand



ACM26x.

125KHz EM RFID

115mm×75.5mm×16.8mm

RFID

ACM Goldbridge

RFID 20 RFID RFID RFID RFID
RFID



公司簡介

公司簡介

1. 公司成立於 24 年
2. 公司擁有先進的生產設備
3. OEM / ODM
4. 公司擁有先進的生產設備
5. 公司擁有先進的生產設備
6. 公司擁有先進的生產設備
7. 公司擁有先進的生產設備
8. 公司擁有先進的生產設備

公司簡介

1. 公司擁有先進的生產設備
2. 公司擁有先進的生產設備
3. 公司擁有先進的生產設備