

□□□□□□□□/□□□□□□□□□□**12V 24V**□□

ACM-Y131

□□□□□□□□□□/□□

- ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☒ ☒ ☒ ☐

D
C
1
2
V
□□
□
□
V2
2
h
A
17
;
8
m
a
17
E
a
i
l
S
e
c
c
u
r
e
17
;
□
□
□□
17
□
□□
□
□
□□
P
V
C
□
+□
2
C
□
□

[illegible]

Advantage.


ACM-Y131 - Power-To-lock.it
- pvc

□□□□□□OEM / ODM□□

□□□□□□□□/□□□□□□□□□□12V 24V□□



ACM-Y131 NO / NC

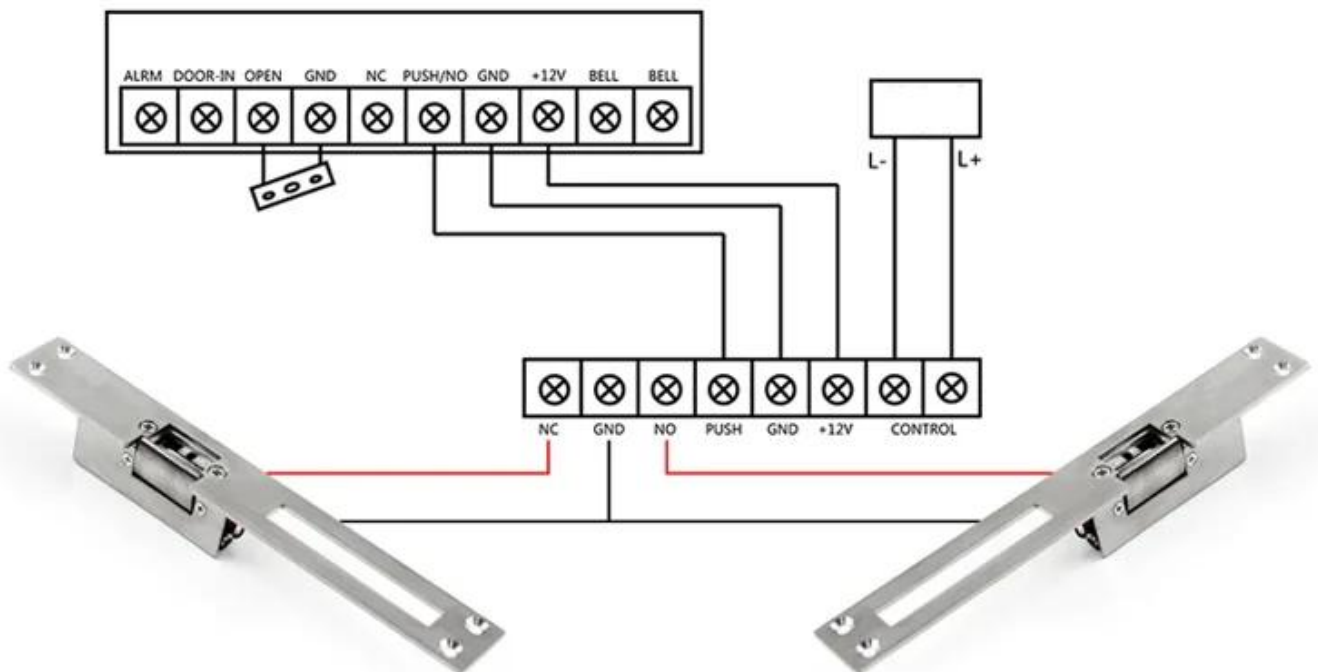

NC / NO

03 Low temperature design

less heat is safe and reliable.



04 Low Power Design

Rated Operating Voltage: DC 12V
Current: 240mA(Fail-secure) /
120mA(Fail-safe)

05 High-quality Aluminum Case

Made of high-quality aluminum for high hardness,
corrosion resistance & anti-deformation.



- 高品質アルミニウムケース採用ACM Goldbridge2層構造
- 高品質アルミニウムACM Goldbridge2層構造
- 高品質アルミニウム





□□□□□□□3□□□□□□□!!!

2019年12月31日，公司总资产为1,000,000,000.00元，净资产为500,000,000.00元，营业收入为1,000,000,000.00元，净利润为100,000,000.00元。

**ACM-Y130**

□□□□□□PVC□□□□□□□□□□NC / NO□



ACM-Y131

□□□□□□□□PVC□□□□□□□□□□NC / NO□



ACM-Y132

280kg□600□□□□□□□□□□□□□□□□□□
□□

You may need

□□□□□□□3□□□□□□□!!!

[illegible]

ACM-Y280

280kg / 600mm



ACM-Y100S.

100mm

no / ncpower



ACM-Y066.

66mm

130x98x41mm working

66mm



ACM-WEG02

2x RS232 / RS485 / TCP /
IP Communication



ACM-K2A

Relese ExitButton K2A 115 * 40mm; K2B 86 * 86mm



ACM-Y806-3A

12V / 3A



ACM-Y280

280kg / 600mm



ACM-26X.

125KHz Wiegand 26/34
115mm×75.5mm×16.8mm



ACM-EMI-S

125khz em