

特點

優點

- 安裝簡便，無需專業人員
- 節能環保，無噪音
- 壽命長，維護簡單
- IP-55防護等級
- 外觀美觀大方
- 適用於各種場所
- LED光源

規格

- 功率：3W
- 電壓：AC 120V / DC 30V
- 電流：12V
- 尺寸：20 * 50 * 4 * 122mm
- 重量：10cm
- LED光源：LED光源，LED光源，LED光源
- 尺寸：11.3 * 6.9 * 3.9 mm / 4.4 * 2.7 * 1.5 mm
- 重量：73g / 2.5oz
- 尺寸：12.5 * 8.6 * 4.5 mm / 4.9 * 3.3 * 1.7 mm


- 重量101g/3.5oz







[illegible]



□ □ □ □ □ □ □ □ □ □ □ □ □

□□□□□/□□□□□□□□□□□□□□□□

• □□/□□□□

IP-55 □□□□ / SUS 304 □□□□

[illegible]

..

□□□□□0.1□10cm

□□□□□/□/□□/□□□□□

□□□□□□□□□□3A/AC120V□DC30V□

• / /

□□□□□□□□□□ LED □□□□

(1) 100000000 LED 100

(2) 10 LED

1111


**Blue LED Indicator:
Power ON (Standby)**



**Red LED Indicator:
Power ON (Triggered)**



+12V	GND	NO	COM	NC
Red	Black	Yellow	White	Orange

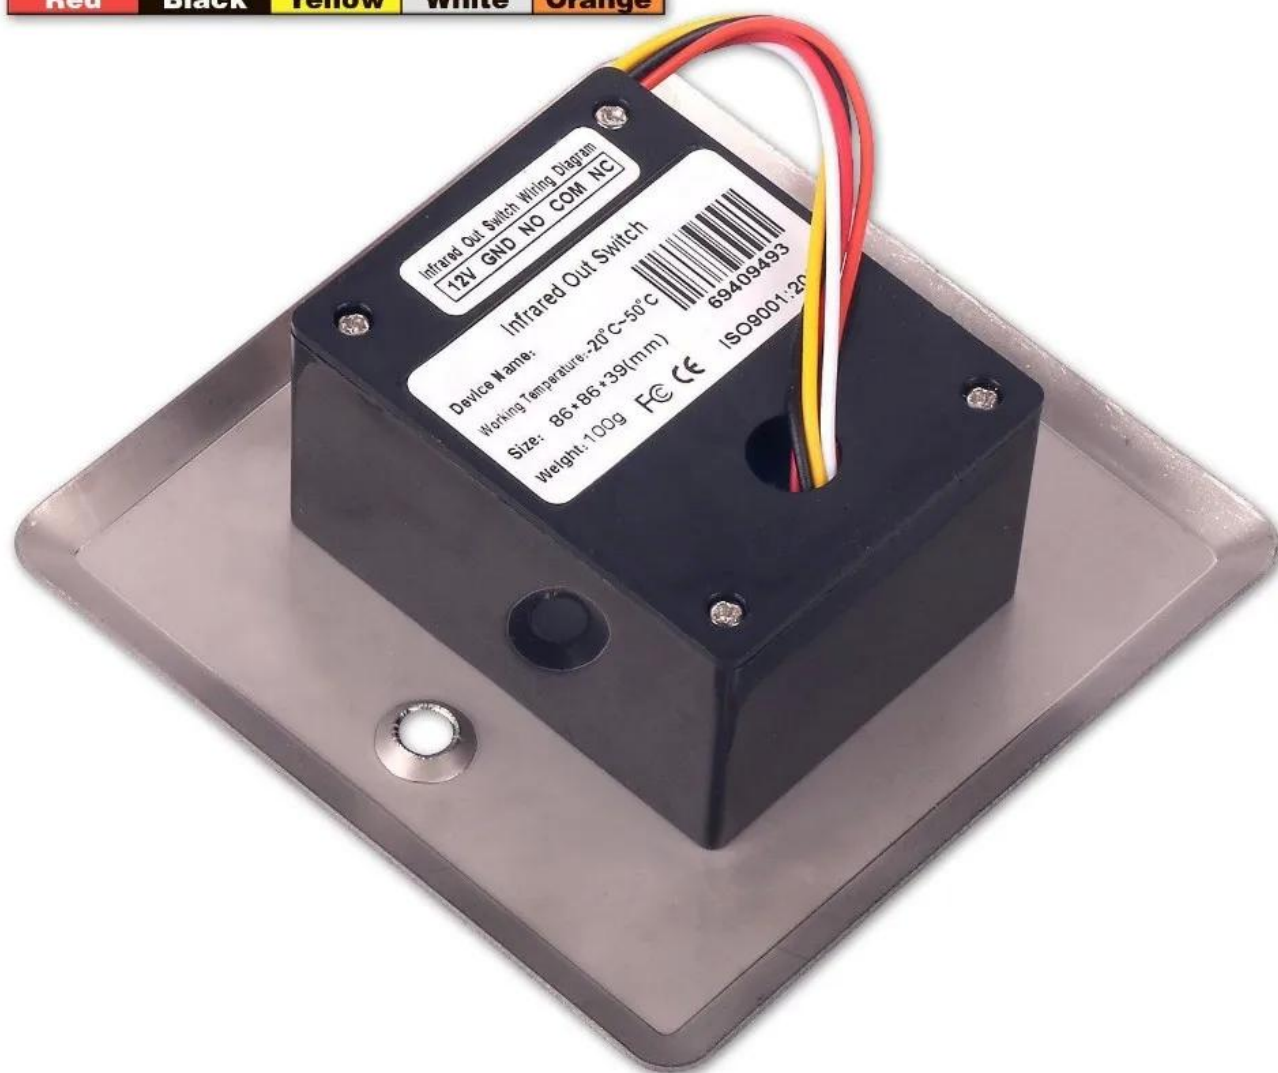

3

20



Installation



Sensing Range



LED Indicator



A: Black / PC Lens


B: Round Shape LED Indicator

Power OFF




White
(Round Circle)

Power On / Standby

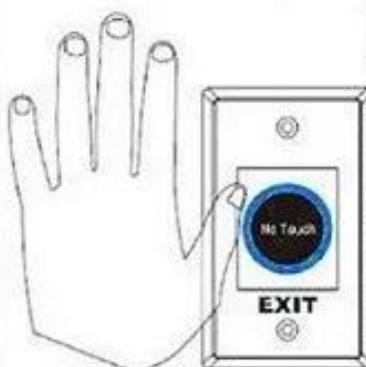


Blue LED Indicator ON
(Round Circle)

Power On / Beam Broken

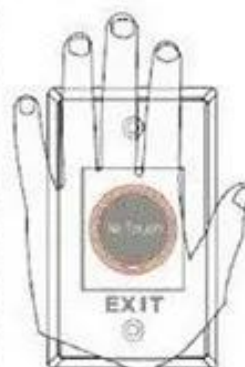

Red LED Indicator ON
(Round Circle)

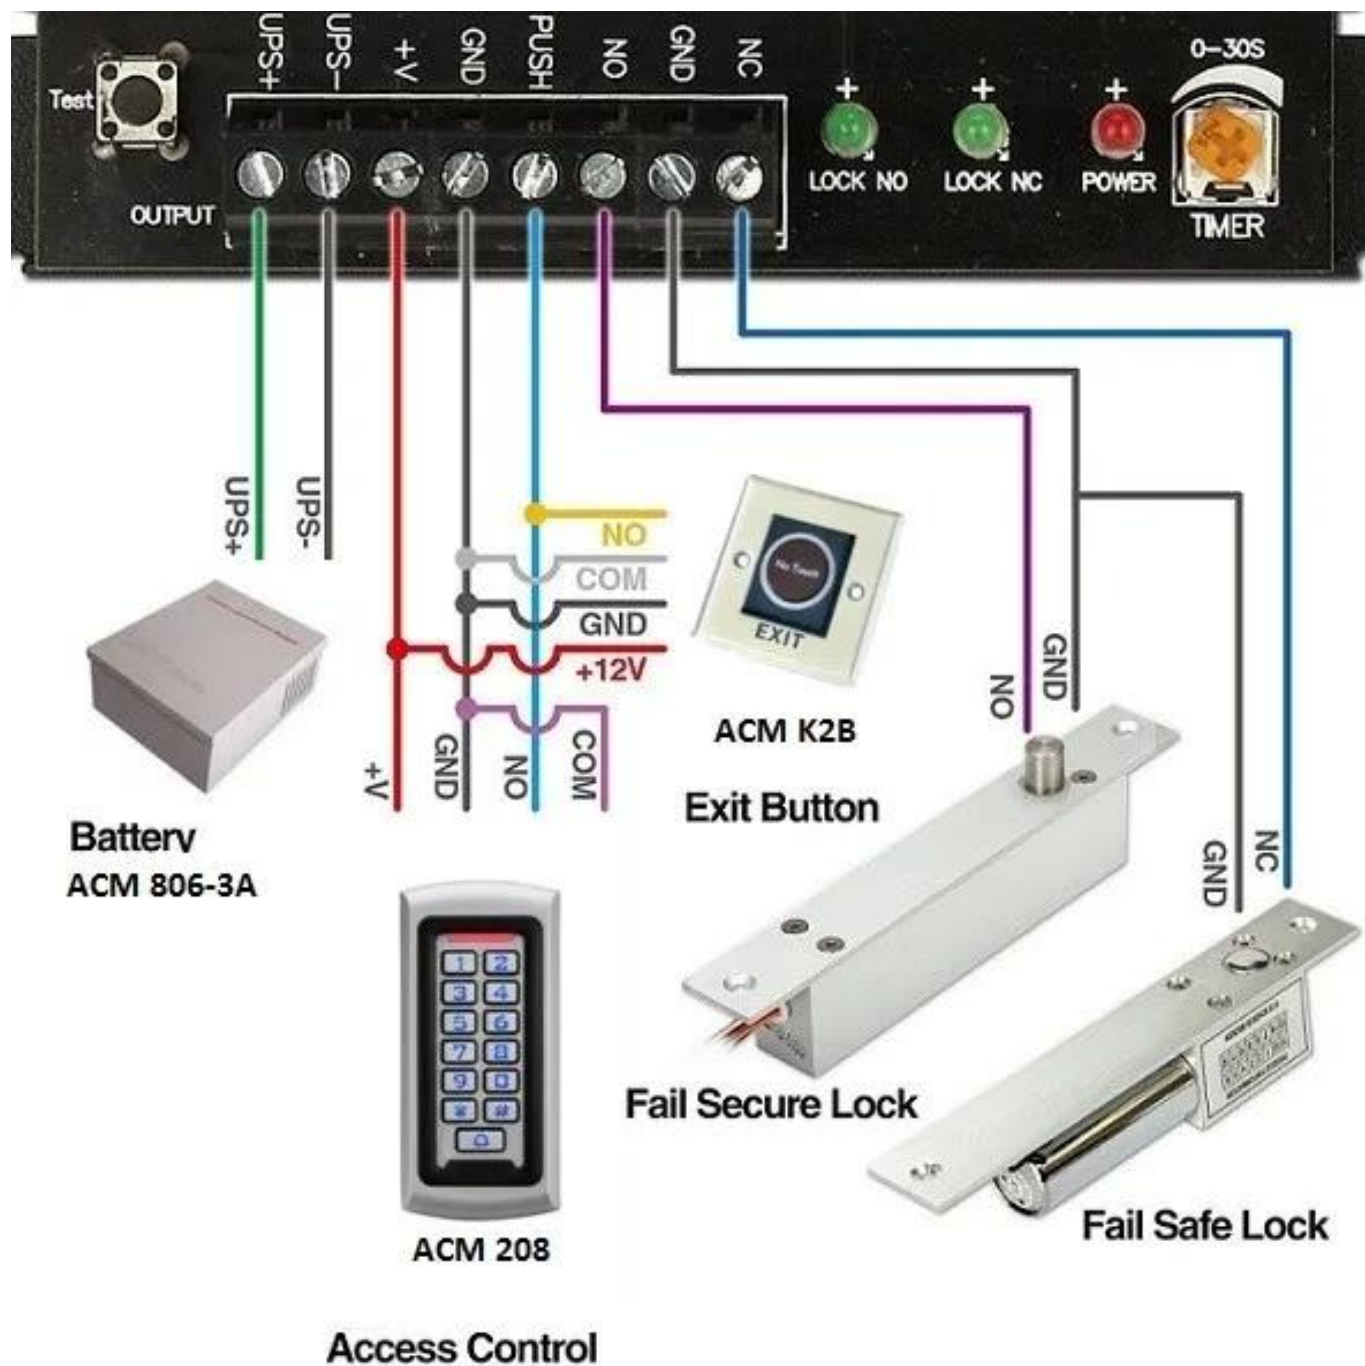

□□□□□

□□□□□ □
 □□□□□ 0.3kg
 □□□□□ 10cm x 10cm x 8cm



A: 1. 100,000 個以上

Q: 4. 100,000 個以上

Q: 100,000 個以上 5000 個以上 3-7 100,000 個以上 7-15

Q: 5. 100,000 個以上

A: 100,000 個以上 100,000 個以上 OEM 100

Q: 6. 100,000 個以上

20 100,000 個以上 RFID/NFC/RFID/RFID/rfid 100,000 個以上

20⁺ YEARS EXPERIENCE

OEM & ODM

ACCESS CONTROL SYSTEMS ONE STOP SOLUTION PROVIDER

Goldbridge is Top 10 China Manufacture On Alibaba,
Specializes In Provide Kinds Of RFID/NFC Cards, FID Tags, RFID Card Reader,
UHF Reader, Access Control System, Electromagnetic Locks, etc Since 1999



Customized
Services



Quality
Assurance



Fast
Delivery



Best After-
Sales Service

ADVANTAGE

WHY CHOOSE US?



- 1 FAST DELIVERY** Faster delivery by air by express. (DHL, UPS or Fedex)
- 2 LONG HISTORY** 20 years experience in RFID & Access Control industry
- 3 OEM ACCEPTABLE** 20 years OEM&ODM experience for 1000 + VIP client from US and Europe
- 4 HIGH QUALITY** Design and manufacture high quality products with 30 R&D engineers.



