

[illegible]



Mechanical Life: 1000000 tested



Operating temp: 10~+55°C(14-131°F)

Panel Material: Fireproof Material


Current Rating: 3A,36VDC Max







Control Center

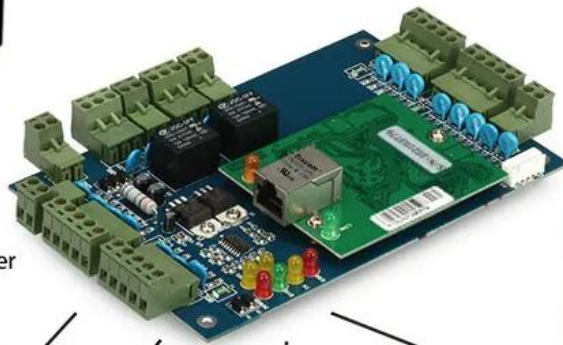

TCP/IP Door Controller



Electric Bolt Lock



Magnetic Locks



Waterproof RFID Reader
Door Access Control



Exit Button



Access Power Supply





□□□□□□□□□□

K2B□86 * 86mm

□□□□□□□□□□

K9A□115 * 40□□

□□□□□□□□□□NO / NC□K5B□86 *
86mm



□□□□□□□□□□□□□□□□K4B□86 * 86mm

kirsite K14B 86 * 86mm
; K815B 86 * 86mm

- 1
- 2
- 3 OEM / ODM
- 4
- 5
- 1
- 2
- 3 2 - 3
- 6 1 5 7 30
- 7 T / T PayPal
- 8 DHL FedEx TNT UPS EMS

1

2
 - T / T PayPal
 DHL FedEx TNT UPS

3

4
 3000 3-7 7-15 100,000

5
 OEM

6
 RFID / NFC / RFID / RFID 20