

Wiegand26RFID

- > IP66
- > 1000
- > Wiegand 26 37
- > Wiegand Line
- > + /
- > 125kHz HID EM 4 6
- >
- > 2PCS

1
2
3
4
h
z
5
6
7
8
9
P
0
0
.
1
0
1
1
1
1
9
0
3
3
A
.
1
2
2
4
V
D
C

Wiegand


1	4	5	°C	6	°C	0	9	9	5	0	0	1	2	2	*	5	*	2	1	m	m
---	---	---	----	---	----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---

Standalone Access Controller

Photo



User Information Transfer

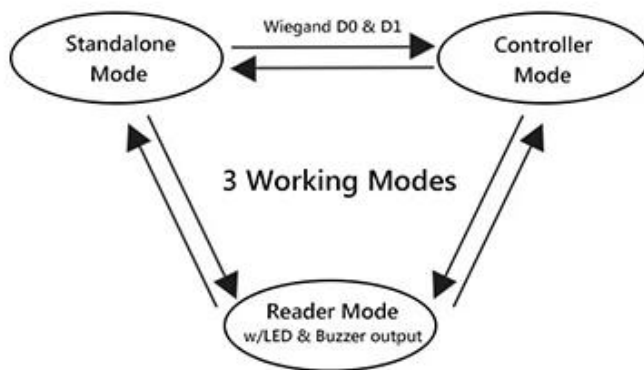


Three working modes-Wiegand
26~37 bits input & output


2pcs devices support
interlock for two doors




Common Power Supply

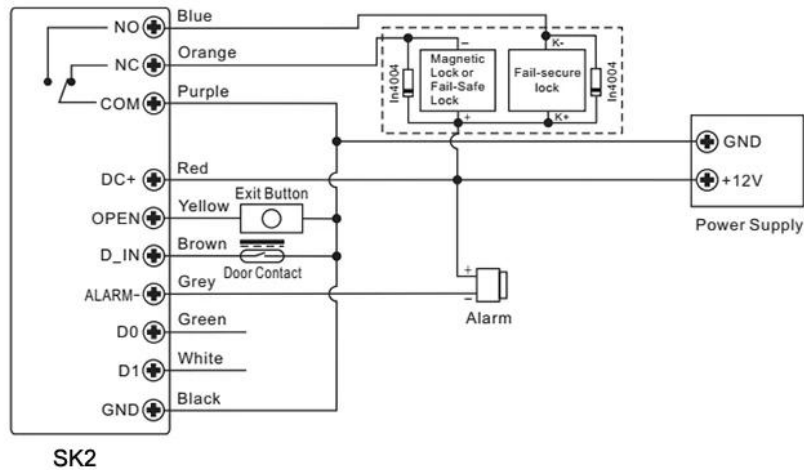

Access Control Power Supply

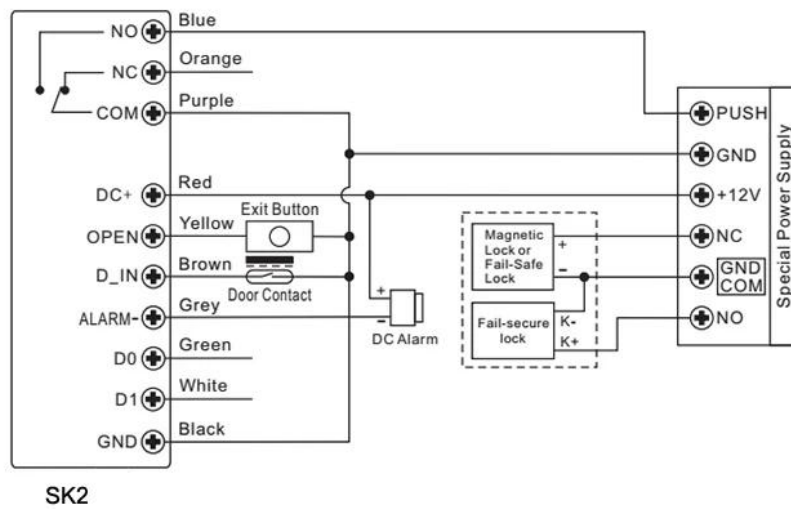

Work As Wiegand Reader

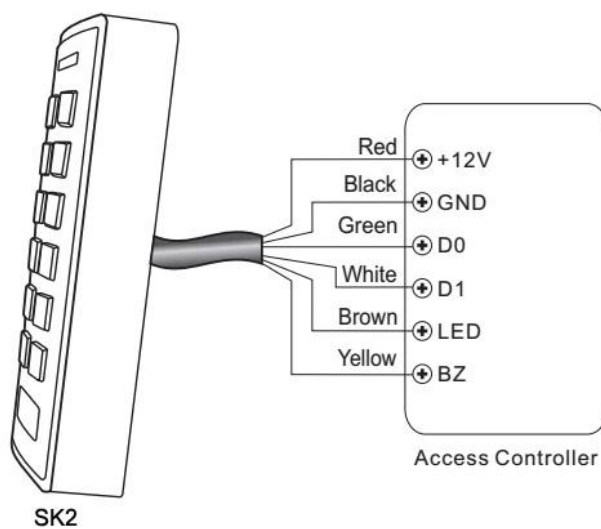

Technical drawing of a rectangular block. The dimensions are indicated as follows:

- Height: 122mm
- Width: 90mm
- Depth: 21mm

□ □





ACM223

RFID 125khz EM
1000/4000

ACM209-NW.

RFID ACCESSCONTON
125khz em

ACM208

RFID





ACM210

RFID

ACM225

RFID 125khz em CAN
Connect Wiegand Reader

ACM211B.

RFID CAN Connect
Wiegand Reader

RFID

1 24

2

3 OEM / ODM

4

5

1


2

3 2-3

6 1 5 7 30

7 T / T PayPal Ali

8 DHL FedEx TNT UPS EMS



1

[illegible]

2. 数据源

- 000000T / T PayPal000000

□□□□□□□□□□□□□□□□ DHL □ FedEx □ TNT UPS □□□□

3. 数据源

□ □

4

□□□□□□□□□3-7□5000pcs□7-15□□100,000pcs

5

- 00000000000000000000000000000000 OEM00000000

6

RFID / NFC / RFID / RFID RFID 20