

BS-01



1. 940nm

2. 12-24V DC

3. $\leq 20M$

4. 1.92KHz

5. IP65



> 50,000LUX

>

> AGC

> RFI / EMI

>

> 90

>

> C


>

>


Single Infrared Beam Sensor



Detection distance up to 20 meters

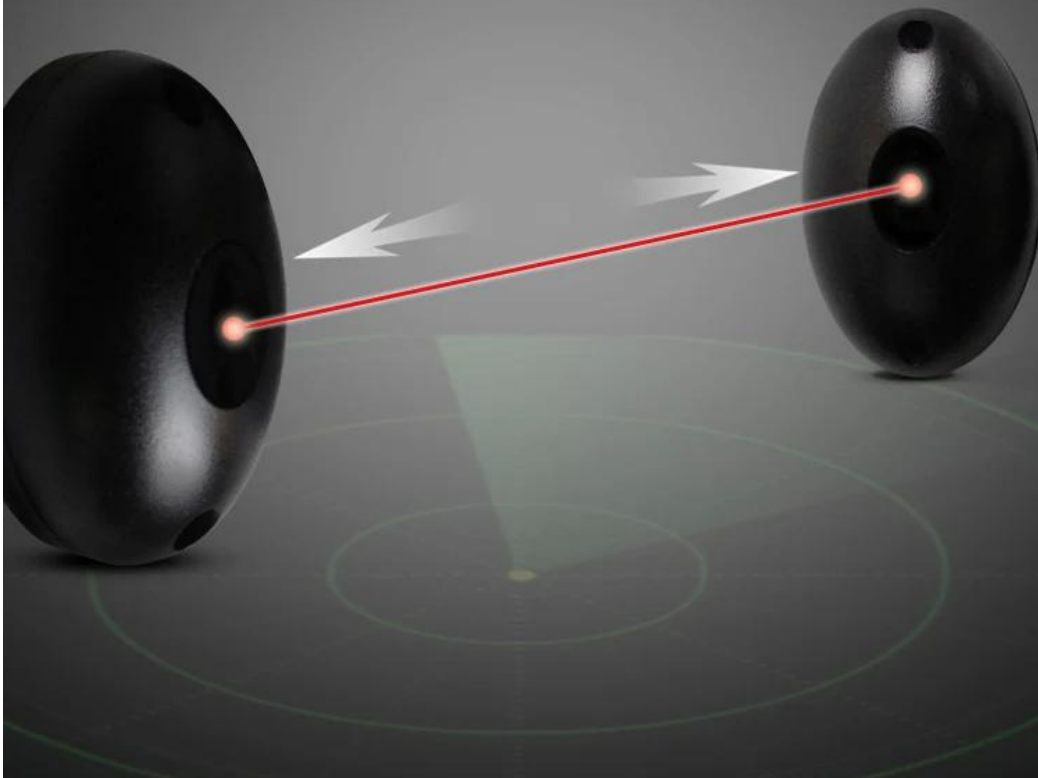

Infrared light receiver

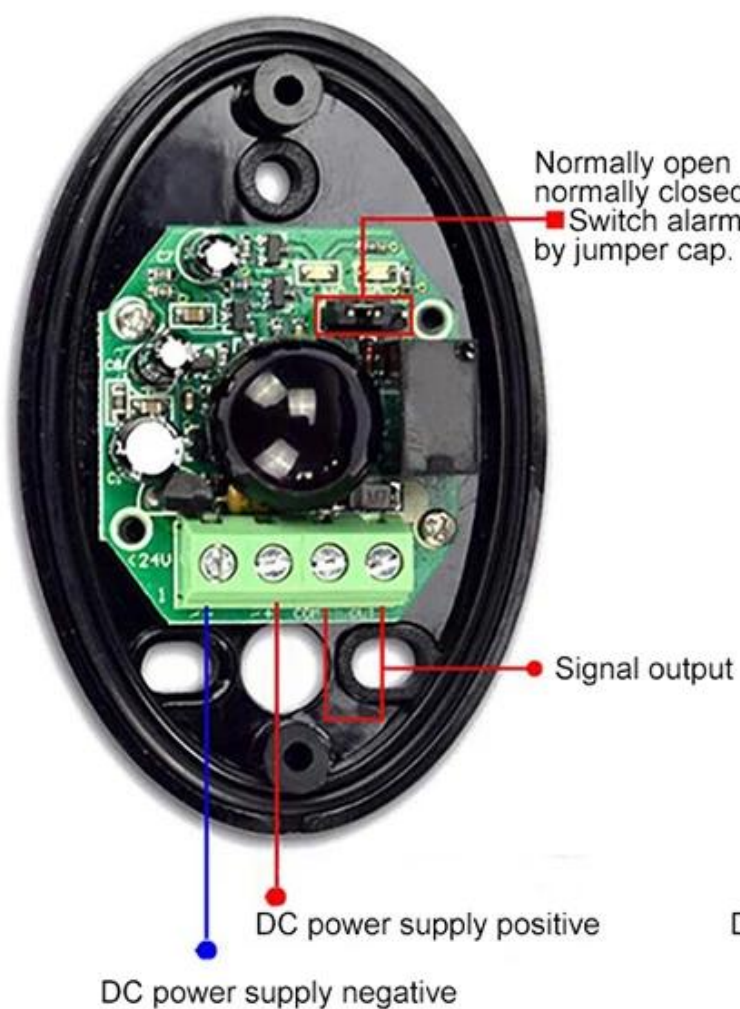

Infrared light projector



Installed on both sides of the gate

Invisible to the naked eye, the photo is just a simulation



Vehicle barrier

Pedestrian gate



Automatic door, sliding door switch, anti-pinch induction

Installed on both sides of the door, wired to connect the door controller.
When someone passes the infrared beam that is folded in half, the door will open automatically.





Door and window security

The shooting is installed on both sides of the door and window, the main unit is installed indoors, when someone intercepts the infrared beam, the host will alarm



Anti-theft, can not be used alone, need to install the alarm host



Product Dimensions



0000

ACM Goldbridge

RFID 20 RFID RFID RFID RFID RFID UHF



0000

3

20 RFID



金橋GOLDBRIDGE

地址

深圳市宝安区西乡街道405室518031

电话+ 0086-755-83767678

0086-755-88391348

联系人

微信/ whatsapp / 电话+ 0086-13554918707

Skype:lily-jiang1206

邮箱sales@goldbridge sz.com

网站http:// www goldbridge sz.com