



125khz rfid

[illegible][illegible]

Webserver - password back MFE 12 VDC 3 A

°
C
.
4
5
3
C
2
0
0
.
8
0
6
2
.
5
x
1
8
5
X
W
4
2
.
5
□
□

□□

- 1.□□□□□□
- 2.□□NO□NC□□□
- 3.□□□□□□
- 4.□□□□Wiegand 26□□□
- 5.□□□□□□+□□□□□□□
- 6.□□□□□□□□


□□□□

ACM-2000C□□□□□□□□□□□□□□



Access Controller:

Working Voltage: 12VDC+12%/1.2A
 Working Temperature: Working:0-45°C;
 Relative Humidity: Working:40%-90%;
 Unlock Relay: 12VDC/2A
 Working Frequency: 125KH
 Reading Distance: 5-15cm
 Card Type: EM or EM compatible
 WG Interface: WG26
 Dimension: 117X20X117mm(L/H/W)

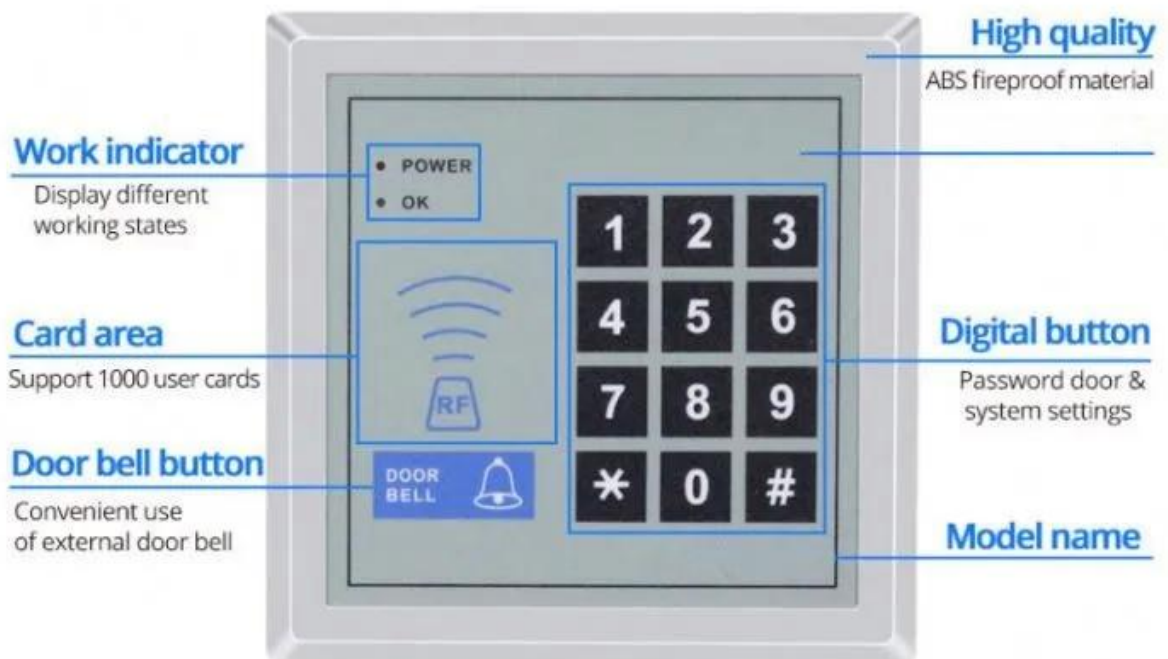

Touch Keypad RFID&AccessControl 125Khz EM1000 / 4000 User

accss

Kit2:suitable for wooden and metal door, not need bracket,convenient to install.

Working voltage: 12/24V
Time Delay: 0s, 3s, 6s (Adjustable)
Locking mode: Magnetic Induction
Dimension: 150X34X28 (L/W/H)



Scope of Application



Company



Hospital



Hotels



Logistics



Port



Financial



Government



Factory



Aviation



School

[illegible]

--	--	--	--	--	--

[illegible]



ACM223

Touch Keypad RFID&125Khz
EM 1000/4000 USer

ACM209-NW

RFID AccessControl
125Khz EM

ACM208

RFID





ACM210

RFID

ACM225

RFID 125Khz EM

ACM211B

RFID

- 1
- 2
- 3 OEM / ODM
- 4 &
- 5
- 1
- 2
- 3 2 - 3
- 6 1~5 7~30
- 7 T / T Western Union Paypal Ali
- 8 DHL FEDEX TNT UPS EMS SEA Air

1

2

□□□□□□T / T□Paypal□□□□□□
□□□□□□□□□□□□□□DHL□FedEx□TNT UPS□□

□□**3**□□□□□□□□□□□□□□□□
□□□□□□□□□□□□□□□□□□□□□□

□□**4**□□□□□□□□□□□□□□□□
□□□□□□□□□□3-9□□5000pcs□7-15□□100,000pcs

□□**5**□□□□□□□□□□□□□□□□
□□□□□□□□□□□□□□□□□□□□□□ OEM□□□□□□□□□□

□□**6**□□□□□□□□□□□□□□□□
□□□□□□□□RFID□/ NFC□□/ RFID□□/ RFID□□□rfid□□□□□□□□□□□□□□□□20□□□□□□□□