



IP68RFID

ACM-A60

1
3
*
6
8
.
4
*
1
7
.
5
□
□
W
G
2
6
/
3
4
□
□
□
□
□
□
8
0
□

1
2
5
K
H
z
E
M
7
1
3
4
5
6
m
h
z
4
N
P
0
9
0
1
.
1
8
2
.
3
6
.

Product function

- ◆ Touch control waterproof panel,
- ◆ Metal casing with blue backlight
- ◆ WG26 / 34 input / output
- ◆ Support card, pin, card + Pin
- ◆ Full programming from the keyboard
- ◆ Human tampering alarm function
- ◆ Can set the management card
- ◆ Active and passive lock signal output
- ◆ Imported double point relay output signal
- ◆ Non contact type for radio frequency identification transponder technology
- ◆ Connect to the external release button (exit button)
- ◆ Memory capacity: 8000 user cards and 1 passwords
- ◆ Do not need to be connected to the computer, it can work alone
- ◆ The same series of access control supports data backup and backup
- ◆ Can be used to read the header and a machine



ACM-A60 四色LED 2000 毫米RFID 毫米

ACM-A60 Model



Touch metal door access controller

Support rfid card, password,
rfid card + password.
Support 8000 user capacity

Support fast data copy



Lightning delivery



Global sales



Package mail



Technical support




After-sale

□□□□


□□□□ 26/34□□□□□□□□□□

产品解析


Product analysis



Work indicator

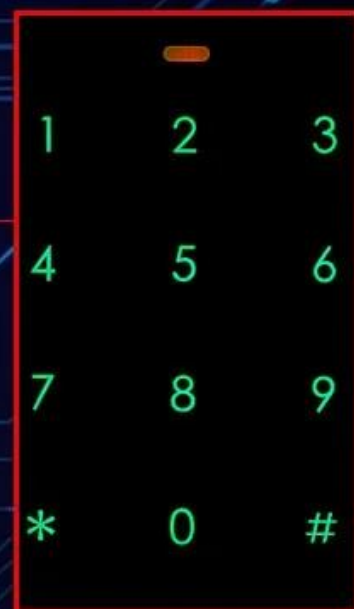


Touch waterproof
button & Card area



Door bell



Wiring diagram

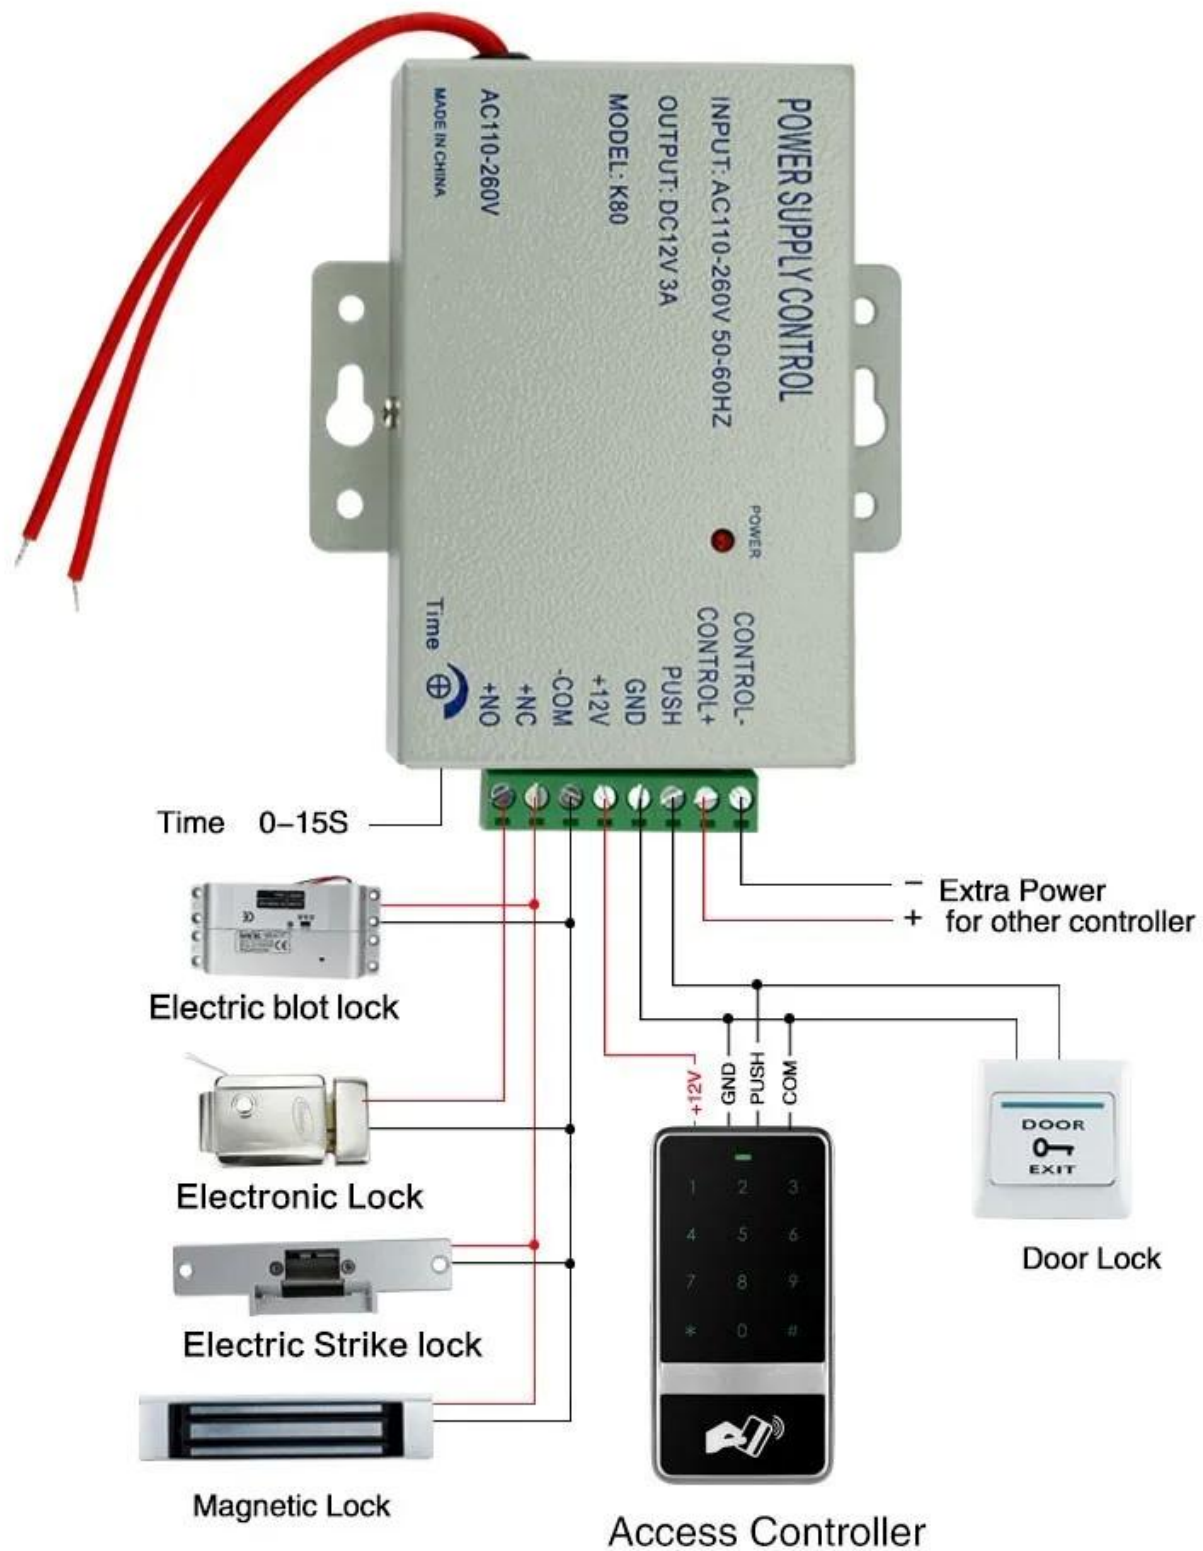

Attention when electronically controlled lock must be transferred to 0seconds delay, to prevent burning of electric lock.

May Like

00000000



ACM-Y100S

0000005PIN0000000000000000

ACM-Y280

280kg600lbs0000000000000000

□□□□

ACM-K2A

□□□□Realese□□□□□□K2A□

□□115×70×25mm□K2B□

□□86×86×25mm



ACM-Y806-3A

□□□□12V 5A□□□□□□□□

ACM26X

125Khz wiegand 26/34□□□□□

□□115mm×75.5mm×16.8mm

