
WiFi APP
10000000000000000012vDC0000
2
3 000000000000
RF433
00000WF0000000000000000000000000000000
APP
00000000-000000000
00000WF0000000000000000000000000000000
□□□□86X86X22mm
10°C- 55°C (14-131°F)
1433.92MHz

 $2 \hbox{\tt loop} DC \ 3V$

- 3000000<10mW
 4.00000<1000000000
 500000-10°C070°C
 6.00086*86*15.50mm
 7.00000CR203200
- 1*00000



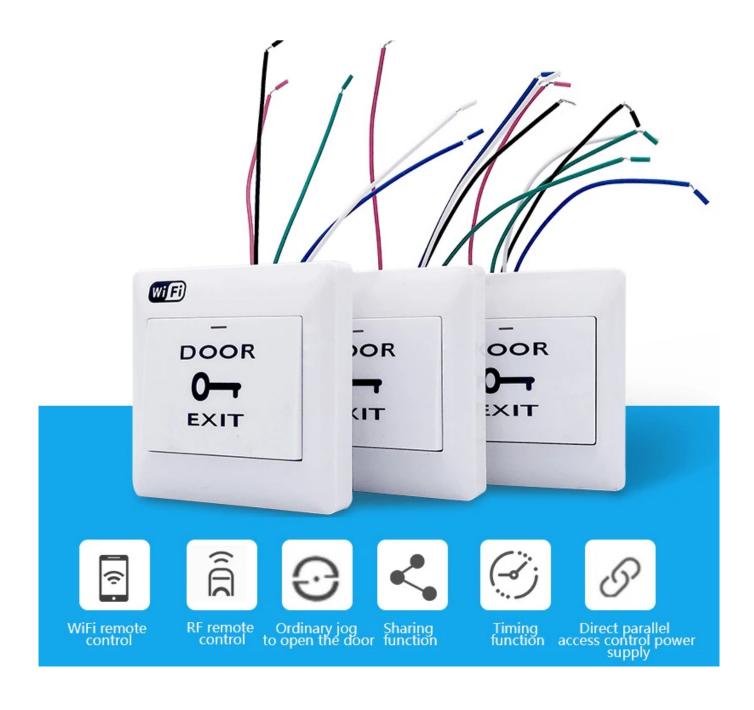

RF433 remote control

The device is installed in a weak current system with a WIFI environment, and the switch can be remotely controlled within a certain distance.



APP remote control

Simple and intuitive switch button Switch status is synchronized with the mobile phone in real time

The device is installed in a weak current system with a WIFI environment, and the mobile phone can remotely control it in any place where there is a signal.



Door Realease Exit Button



Door Release Exit Button —












ACM-K3RG/K3RR ACM-K3/K3R

ACM-K4A/B

ACM-K7

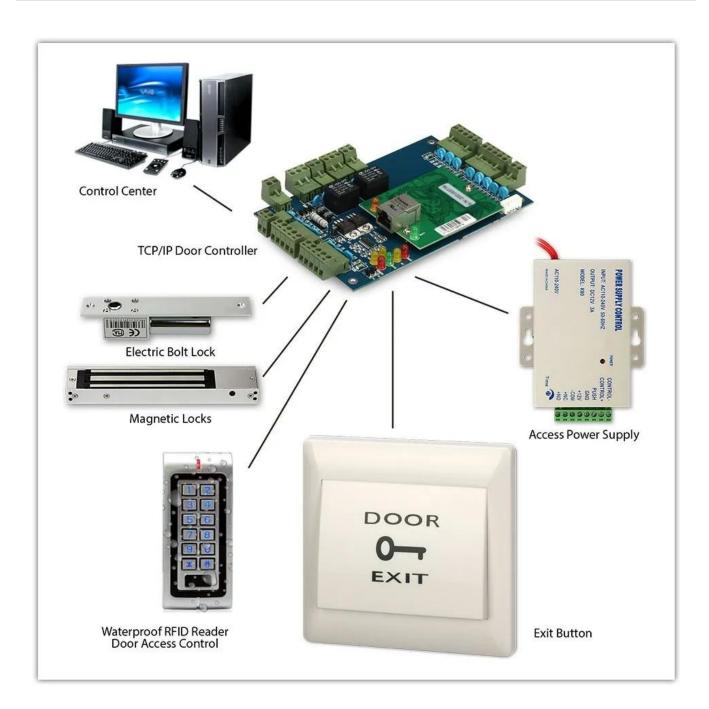

____0.3kg

 $\square\square\square\square\square\square$ 10cm x 10cm x 8cm









3, OEM/ODM □□

500000

60000 : 0000 1~ 5 00000 7~30 0

7Paypal
80000

1.

]: 2.

A: _____ 5000 _ 3-7 __100,000 _ 7-15 _

:6.