

□□□□□□□□□□

2. □□ Wiegand 26 □□□□□□□□□□□□□□

3. □□□□□□□□□□□□□□□□

4. □□□□□□□□□□□□□□ 0.1 □□

5. □□□□□□□□□□□□□□ 2000 □


6. □□□□□□□□□□□□□□□□□□
□□□

7. exit □□□□□□□□□□

□□□□





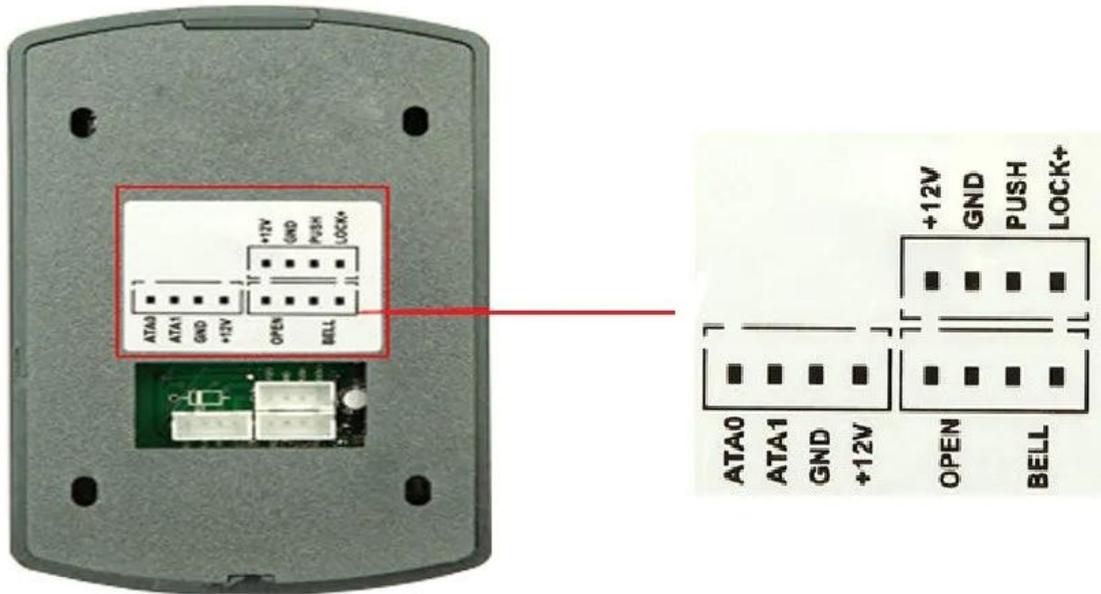





□□□□

□□Wiegand 26□□□□□□□□□□□□□□



Specification

This system have one built-in reader

This system supports 1000 EM cards

Can work with a WG26 card reader, open the door indoor and outdoor with the card, increase the system security

This system supports multi-mode entry methods("Card only", "Card& Password" and "Card or Password")

Relay output (E-lock), one set of Doorbell

Distance: 5-20cm

Card Type: RFID card/token

Voltage: $12V \pm 10\%$

Unlocking Current: $< 1000mA$

Quiescent Current: $< 60mA$

Capacity

Card:1000

Password: 1000

Card reader distance: 5-20cm

Proximity Card: EM or compatible

Environmental temperature: $-20^{\circ}C \sim 70^{\circ}C$

Relative humidity: $10\% \sim 90\%$



□□□□□□□□



ACM-Y100S

□□□□□5PIN□□□□□□□□□□□□□□

